

MAY 3 1939

PANEL TYPE MACHINE SWITCHING

4-

by Elsworth H. Goldsmith

A digest of an illustrated talk given before groups of employees of the New York Telephone Company



Photo by Thomas A. ...

NEW YORK TELEPHONE COMPANY
December, 1926

40

TT p^v

1, Telephone — Exchanges, central stations and switchboards

2, " , Automatic

S 17D

Foreword

*T*HIS booklet endeavors to explain fully and accurately, and yet in a simple and understandable manner, the operation of the panel type machine switching telephone system. It has been compiled from information furnished by the American Telephone & Telegraph Company and is designed for the use of students of Telephone Engineering and Telephone Engineers who require a general picture of the apparatus and its functions rather than a detailed description of operation.

The text follows closely that of lectures which the author has delivered to employees of the New York Telephone Company and the description has been confined to the apparatus and circuits used in the larger central offices in the City of New York. Most of the illustrations are already familiar to Telephone Engineers but many of them are new and have been especially designed to emphasize the basic principles upon which the system is founded and to make clear by means of simple diagrams the relations between the various pieces of apparatus which are sometimes not easily understood from even the most carefully written descriptions.

It is hoped that telephone experts will overlook a lack of meticulous accuracy in some of the statements on the ground that simplicity is the more desirable attribute and that those who find the explanations too involved will be equally lenient when the magnitude of the subject is considered.

General Principles

IN A manual telephone system the subscriber tells the number he desires to an operator who selects the number for him and connects his line to the line of that number or who, in larger systems, connects the line to a trunk to a distant office and repeats the number he desires to another operator who selects the line for him. In machine switching systems, the sequence of operations is somewhat similar but the operations are performed by electromechanical switches.

Since an electromechanical switch cannot respond to the voice of the subscriber as an operator can, it is necessary to provide a means for the subscriber to tell the switches what number he wants. This mechanism is the "dial" (Figures Number 1 and Number 2). Most people are now familiar with the operation of the dial. The subscriber puts his finger in the hole of the dial in which appears the letter or figure which he wishes to tell to the switches, pulls the rotating disc around until his finger strikes the stop and lets go.

A spring rotates the disc back to its normal position and in doing so simply opens and closes the circuit of the subscriber's line the number of times indicated by the figure under the hole into which the subscriber puts his finger. It must be remembered that that is all the dial does—it opens and closes the circuit of the subscriber's line a certain number of times. A little governor in the back of the dial controls the speed of the rotating disc and assures that the opening and closing of the circuit is uniform and regular. By performing this operation the proper number of times, the subscriber tells the switches the central office in which the desired line is located and the number of that line. It should be noted that rotating the disc with the finger in the hole marked "zero" opens and closes the circuit ten times, since opening and closing it zero times would mean not opening and closing it at all. This, then, is the way in which the subscriber tells the switches what number he wants. The simplest form of

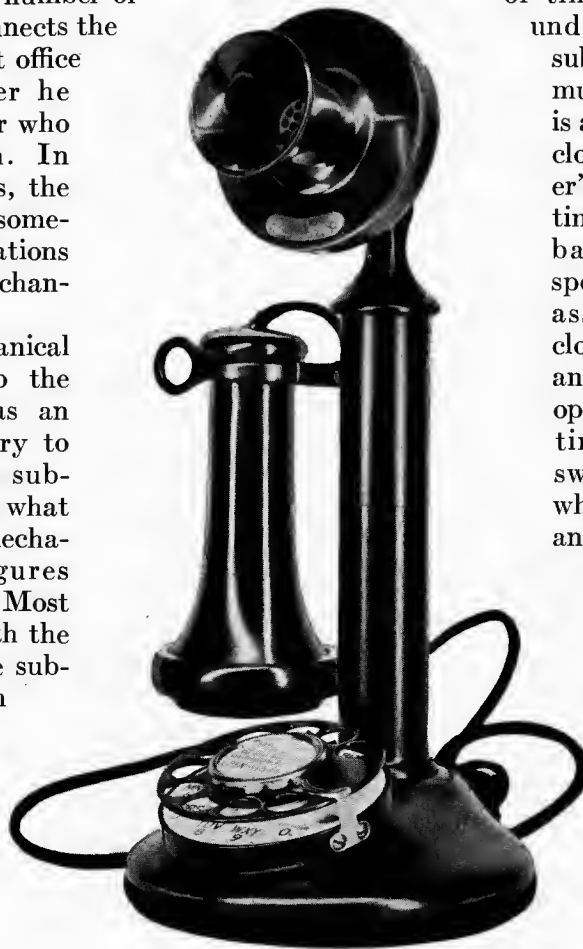


Figure 1

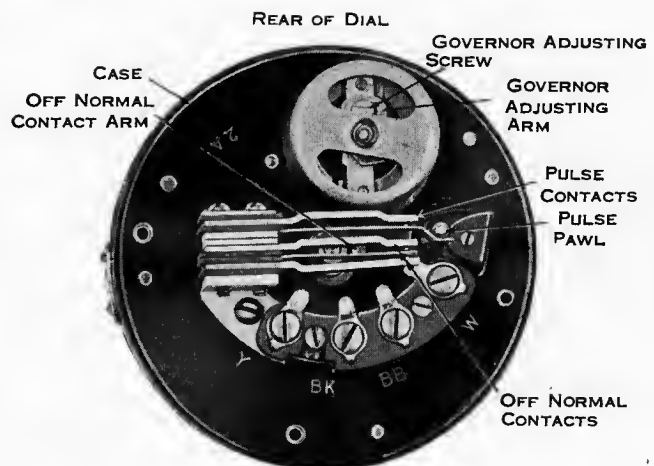
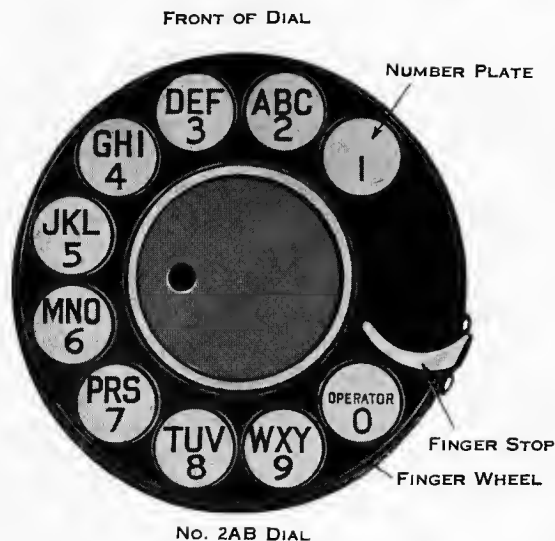


Figure 2

mechanical telephone (Figure Number 3) would be some sort of electromechanical switch electrically connected to the subscriber's line, the arm of which would, by means of a magnet, be moved one step each time the circuit of the subscriber's line was made and broken by the dial. This would enable the subscriber to connect his telephone to any one of several other telephones by a single rotation of his dial.

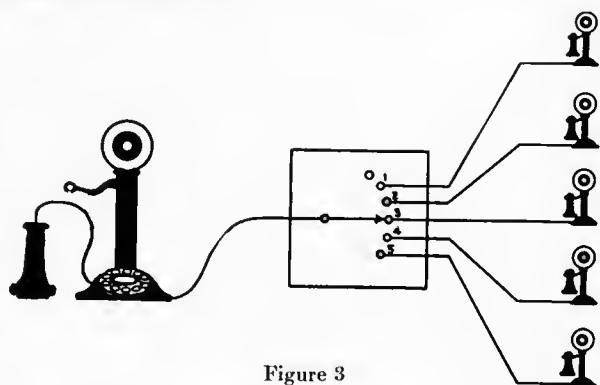


Figure 3

More telephones could be reached by the subscriber by arranging the switches as in Figure Number 4. Here the first rotation of the subscriber's dial moves the arm of the first switch while the second rotation of the dial moves the arm of the second switch. To insure that the second switch is moved by the second rotation of the dial and the first switch not moved, a slow release relay is included in the circuit. This relay is so slow that it will not release during the rapid

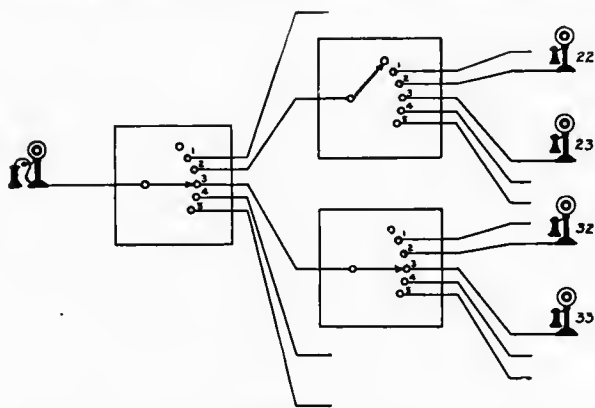


Figure 4

pulses produced by the dial but does release in the pause which ensues when the subscriber reaches for the second pull of the dial. This slow release relay is a fundamental principle of dialing telephone systems.

The arrangement of switches as shown requires that one selector switch be provided directly connected to each subscriber's line. During the time that the subscriber is not using his telephone this

switch is, of course, idle. In Figure Number 5 we see a complete telephone system on this principle but the number of switches has been reduced by introducing a switch known as a line finder. One of these switches is provided for each five subscribers' lines and is so arranged that it automatically moves to the terminal of the subscriber's line whose receiver has been taken off the hook to make a call. The use of this switch in the system shown is based on the idea that out of each five subscribers only one will be using his telephone at any one moment. It is possible, of course, to provide two of these switches for each five subscribers or any other number, depending upon the number of subscribers which it is found will be using their telephones at the same moment.

An additional feature is illustrated in Figure Number 5. It will be seen that there are two trunks between Office "A" and Office "B" and that these trunks are multiplied to both the selector switches shown. Thus, two subscribers may at the same moment talk from Office "A" to Office "B" but this requires an additional feature in the selector switch. It must be so arranged that if it is moved by the subscriber's dial to a trunk which is already in use, it will automatically move to the next trunk. This feature is known as "trunk hunting" and is another characteristic feature of mechanical telephone systems of this type.

It should be observed that no attempt is made to make the action reversible; that is, an entirely separate set of apparatus must be provided for calls from Office "B" to Office "A." This is the usual arrangement in mechanical telephone systems of this type. A system based on the principles described above would be quite practical. There are other considerations, however, which influence the design of the apparatus.

The system described above operates on the "step-by-step" principle and is of the rotary type; that is, switch arms move in a series of steps and in the arc of a circle. The making and breaking of the subscriber's line circuit causes directly the movement of the switches which make the connection to the called line. This may be called "direct control." It follows also that the dialing of any digit causes the switch which is at that moment connected to the subscriber's line to make a corresponding number of steps; thus if 5 is dialed, the switch will make 5 steps, etc. This is described as "numerical selection."

A system operating upon these principles is in extensive use in many of the smaller cities of the United States and has proved to be well adapted to the conditions encountered in these cities.

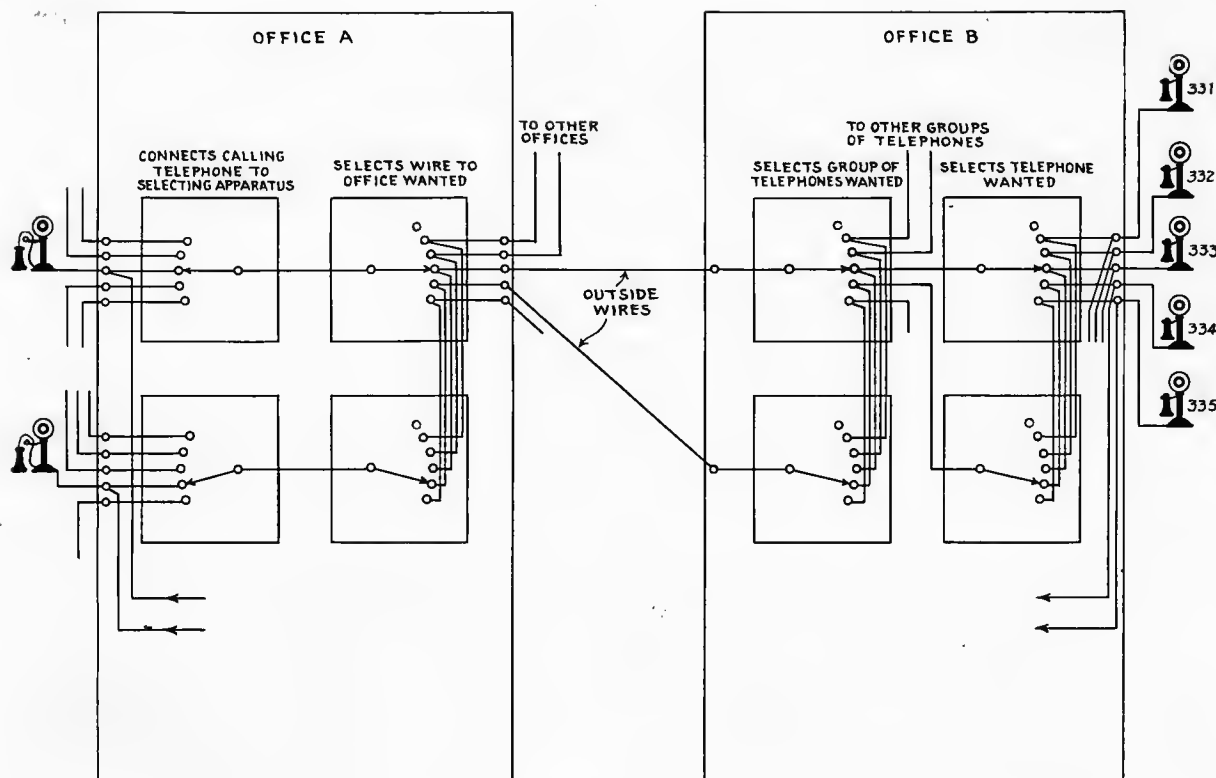


Figure 5

In the simple system illustrated above, two trunks are shown between Office "A" and Office "B" in the group over which the selector switch can hunt to find an idle trunk. In systems of this type the number of trunks in one group over which a selector can hunt is generally limited to ten by the mechanical limitations of the switch. Where more than ten trunks are required to some one place, they must be divided into two or more groups, each of which does not exceed ten. If all of the trunks in one of these small groups become busy, a selector hunting in that group will

not be able to complete the call although there might still be idle trunks in other groups. Could all of the trunks be placed in one group so that each selector could hunt over all of them it would always be possible for every selector to complete a call so long as there remained any trunk still idle. One group of twenty trunks will, in this way, handle more than twice as much traffic as two groups of ten trunks. Where a large number of trunks is required to each office, the advantages of apparatus so constructed that the selectors can hunt over large groups of trunks are apparent.

Principles of the Panel System

The panel type of apparatus is so constructed that the selector may hunt over a group of trunks as large as ninety but this group may also be divided into smaller groups, if desired, so that groups of 5, 10, 20, 30, etc., trunks may be obtained without waste.

When this arrangement is adopted, it is necessary to abandon direct control by the subscriber's dial, for if we wish a selector to choose the fourth group of trunks it might be necessary for it to jump ten trunks at the first step, 20 trunks at the second step and 40 trunks at the third step. This,

of course, would be a very difficult matter to arrange. Furthermore, with a group of ninety trunks the time taken for the selector to find an idle trunk in this group, which might be the very last trunk, probably would be longer than the pause which the subscriber would make between the dialing of successive digits and therefore the subscriber might dial the second digit before the selector had completed the selection indicated by the first digit. Other reasons for the abandonment of direct control will appear as the system is considered in more detail.

When direct control is abandoned, there is no longer any object in having the selectors move by steps, and since the apparatus, to work over such large groups of trunks, is necessarily somewhat large and heavy, it is found more practicable to move the selectors by means of an electric motor which will provide ample power and positive motion.

In addition to the abandonment of direct control it is necessary in such a large and complicated installation as that required in a large city to abandon also numerical selection, for it often is

to the groups of trunks to which the various selectors move in completing his call and that the selectors do not move in unison with his dialing. Therefore it will be necessary to provide some apparatus which will receive the dialing from the subscriber, record it, hold it, change it as necessary, and transmit it to the various selectors so as to control their movements and direct them to the proper places. This apparatus is called the "sender."

Figure Number 6 shows diagrammatically the principles of the panel type machine switching

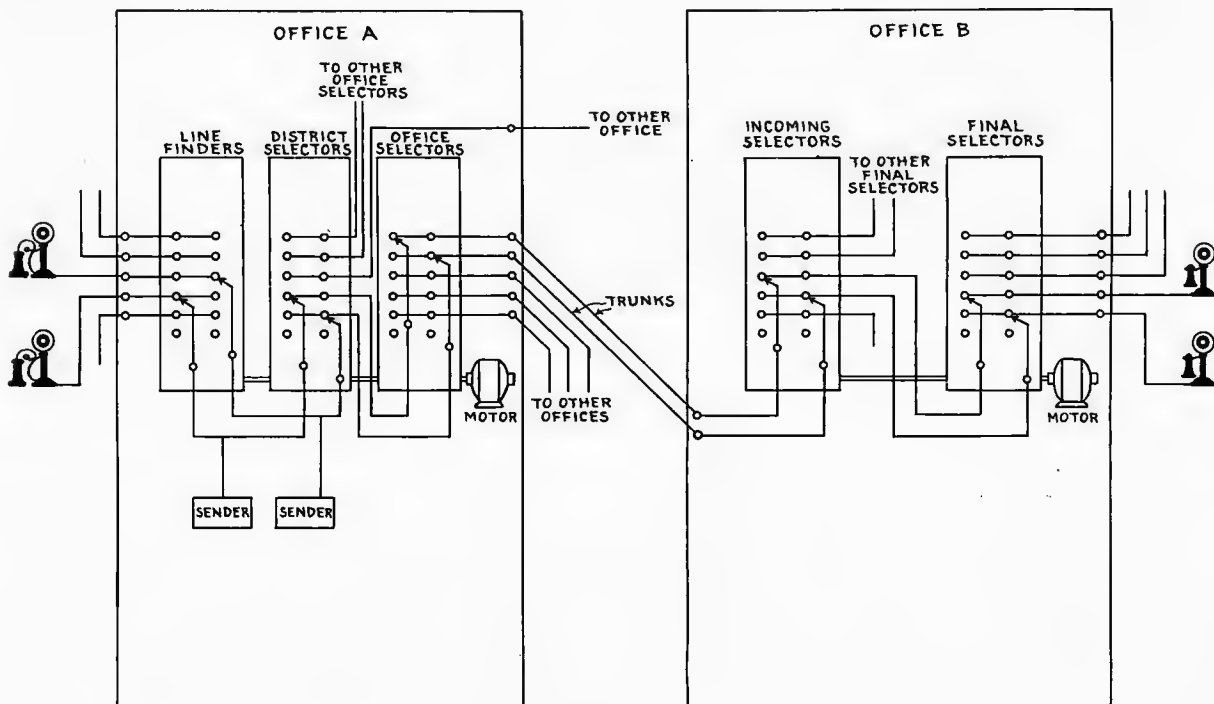


Figure 6

impracticable to make the group of trunks desired when, say, the digit 9 is dialed, the ninth group of trunks. If it is necessary to reach the fifth group of trunks when the digit 9 is dialed, some means must be provided to move the selector over five groups although the dialing actually makes and breaks the subscriber's line circuit nine times. It will be seen later that there are other reasons for doing away with numerical selection.

Having now abandoned direct control and numerical selection, it will be clear that the digits which the subscriber dials have no direct relation

system. This embodies the same fundamental ideas as the previous system, having a line finder switch and a series of selector switches, but the terminals over which the selector switches move have been arranged in vertical rows instead of in arcs and the switches are moved by motors instead of by magnets. No attempt is made to have the switches move in unison with the movements of the subscriber's dial. The dialing of the subscriber is registered in the sender and from that registration the movement of the switches is controlled after the subscriber has dialed.

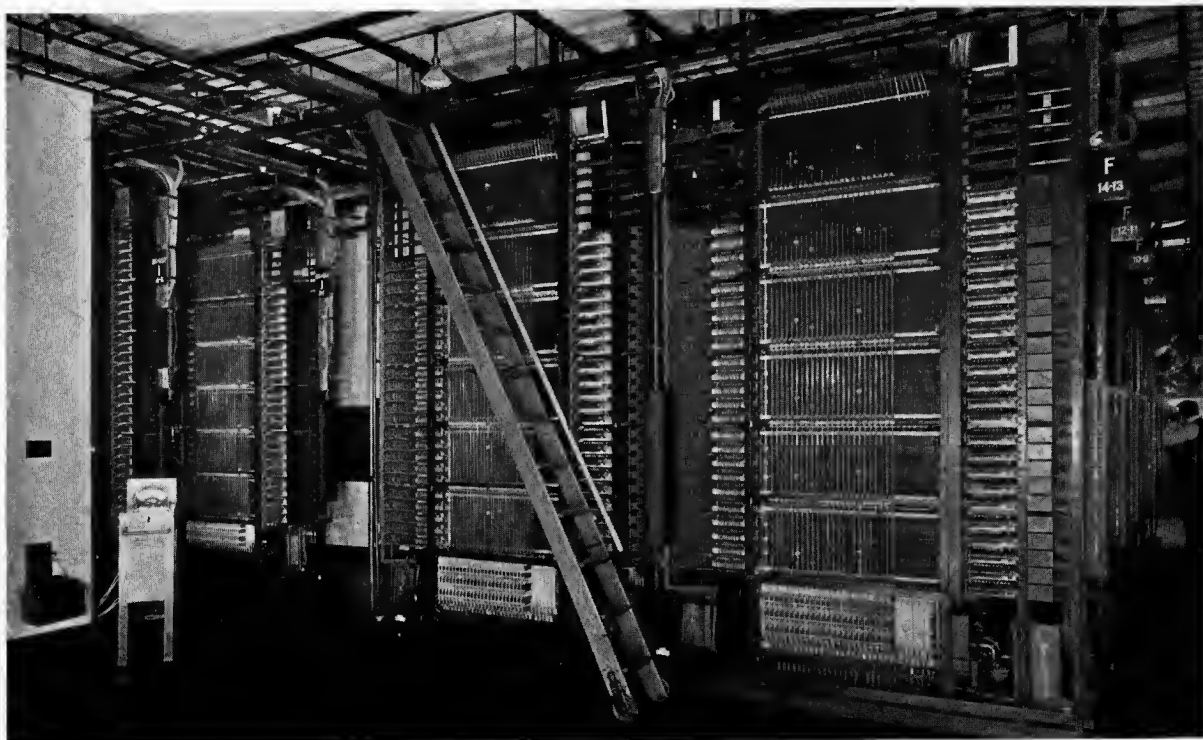


Figure 7

Construction of the Panel Type Selector

In order to understand fully the operation of the panel type machine switching system it is necessary to study the mechanical details of the various pieces of apparatus as actually constructed. The principal piece of apparatus which gives the system its name is the panel type selector, so called because the terminals over which the selector passes are arranged in a flat rectangular bank or panel. This is used throughout the system in various forms, differing in size, in detailed arrangement, in electrical connections, but all having the same general mechanical construction. We will begin by considering the general construction and describe later the detailed differences which distinguish the various selectors.

Figure Number 7 is a general view of selector frames in an office and Figure Number 8 is a closer view of a typical selector frame. It will be observed that all apparatus is mounted upon a structural iron framework securely bolted to the floor and to the ceiling. In Figure Number 8 there will be seen five banks of terminals mounted one above the other. Figure Number 9 shows one of these banks removed from the frame. It consists of flat strips of brass having projecting lugs, separated by strips of insulating material and clamped together by long bolts passing through holes in all of the strips. The lugs are so arranged

that they project on both sides of the bank and are repeated thirty times on the front and thirty times on the rear of each strip. A set of three strips constitutes the terminals of one line or trunk and they are designated "tip," "ring" and "sleeve" terminals as in manual practice.

The terminals of the lines or trunks then appear in vertical rows, each row containing 100 lines or trunks in each bank and there are thirty such rows on the front and thirty on the rear, so that each line or trunk appears sixty times in each bank. Connections to the lines or trunks are made by wires soldered to lugs at one or both ends of the bank. In actual practice, in those selector frames where these terminals represent trunks, only 90 of the 100 possible trunks in each bank are used as trunks, the remaining 10 being required for other purposes.

The selectors consist of vertical brass tubes, one mounted opposite each vertical row of three terminals and arranged to slide up and down. Since there are 60 vertical rows, 60 selectors can be accommodated on each frame, 30 on each side. The selector tubes carry sets of spring fingers or "brushes" in front of each bank which may be made to rub on the terminals when the selector is driven up or down.

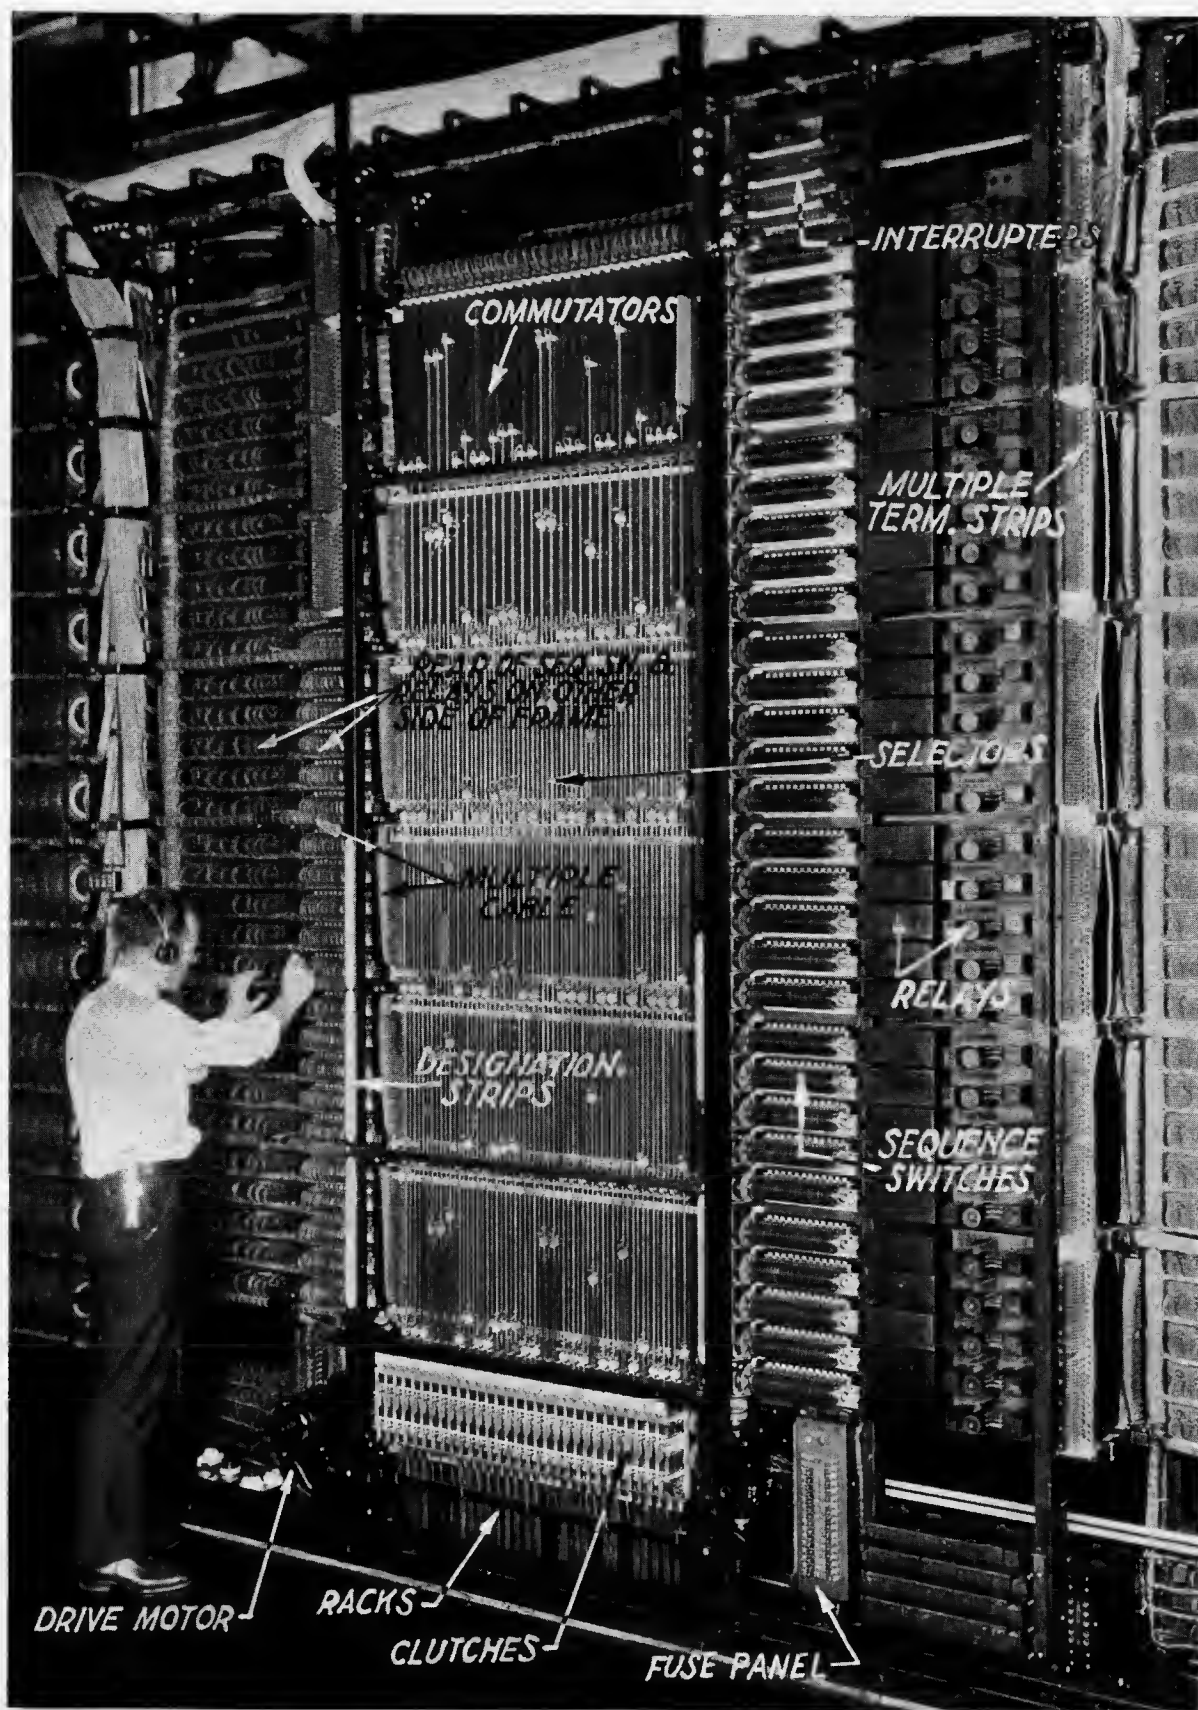


Figure 8
Panel Type Selector Frame

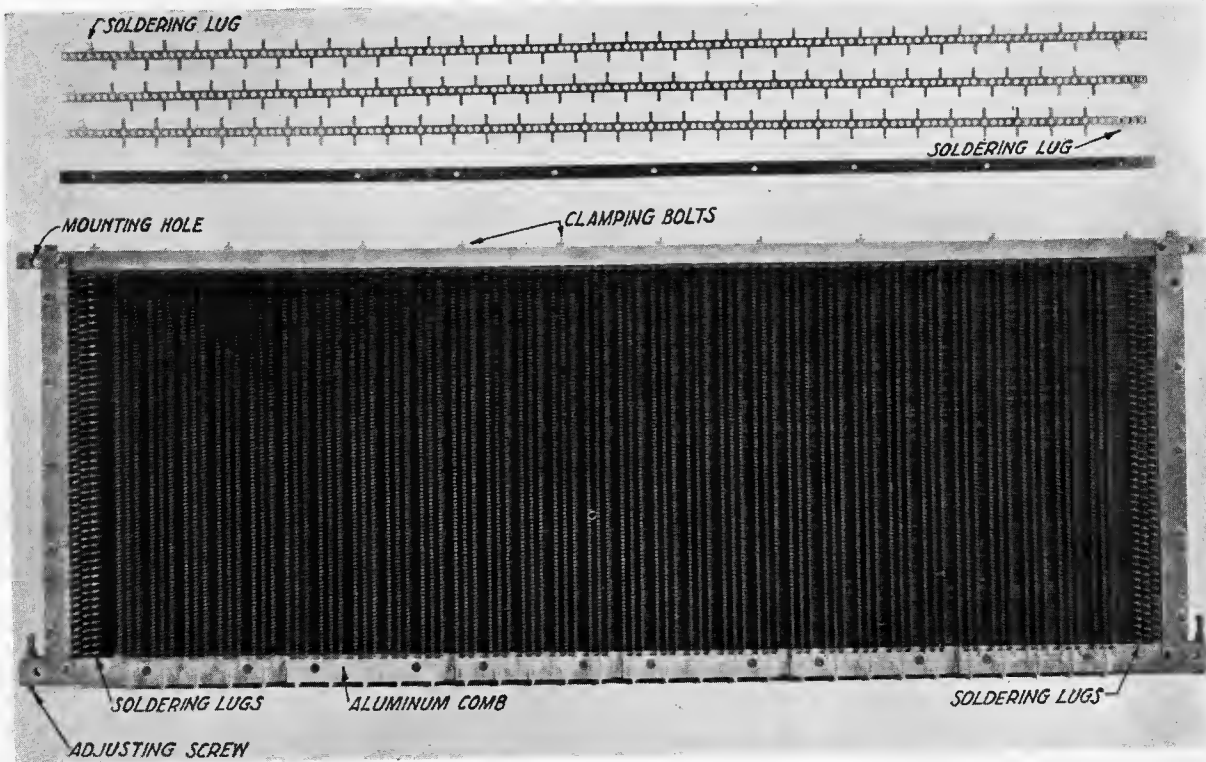


Figure 9

In the middle of the frame at the bottom are long rolls covered with cork composition which are constantly revolved by an electric motor through the medium of gears. The rolls, the electric motor and the gear boxes can be plainly seen in Figure Number 10, while Figure Number 11 shows the

rolls with their gear boxes removed from the frame. The lower roll rotates in such a direction as to drive the selector upward and the upper roll in the opposite direction to drive the selector downward. Each selector tube is attached at its lower end to a flat strip of bronze called a "rack,"

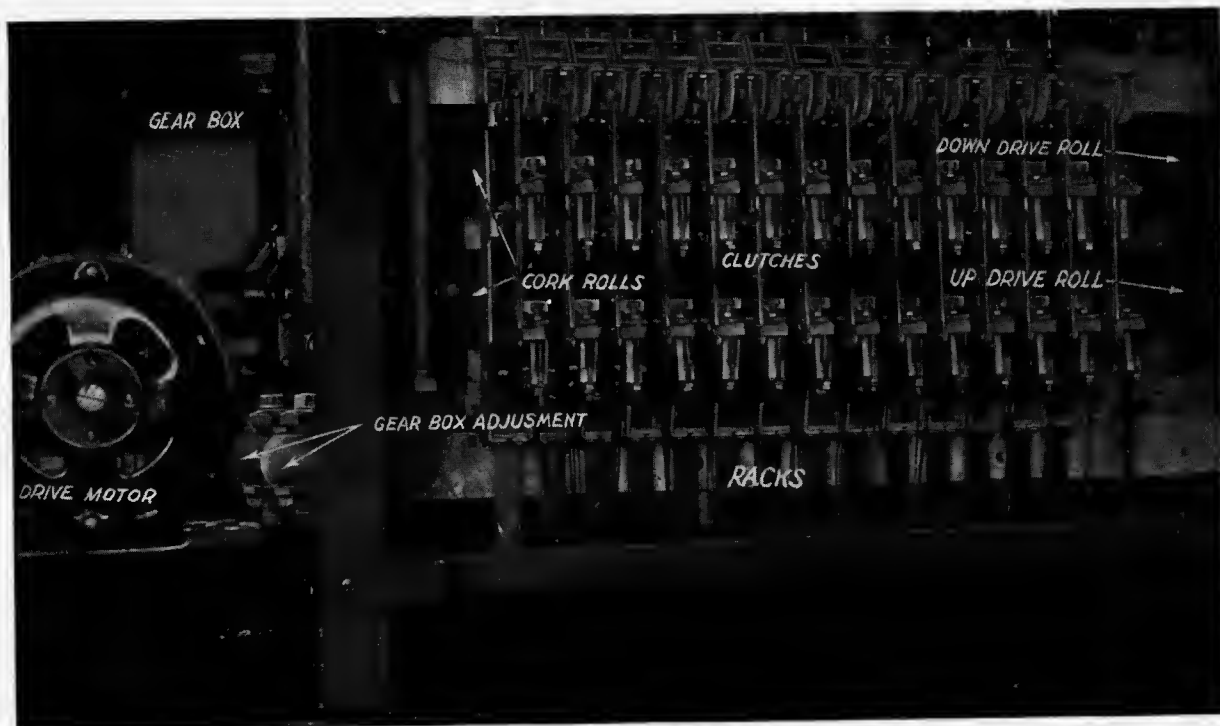


Figure 10

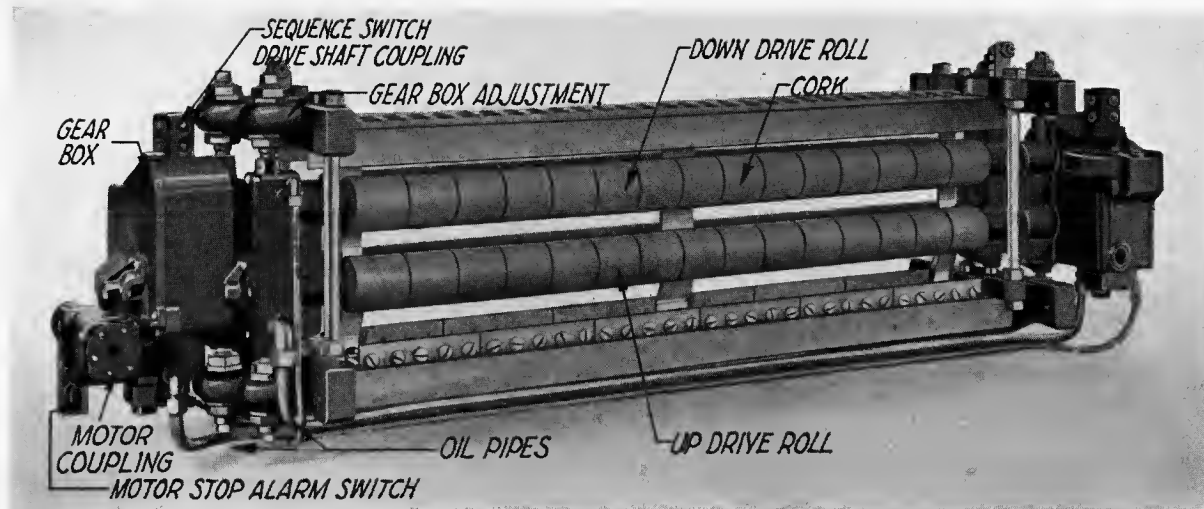


Figure 11

which normally stands just in front of the revolving rolls but not touching them. In front of each rack is an electromechanical device called a "clutch." The clutches are shown in position in Figure Number 12 and a separate clutch in Figure Number 13. When an electric current is passed through one of the magnets of the clutch a roller attached to its armature presses the rack against one of the revolving cork covered rolls which, by friction, moves the selector up or down. A spring

pawl which can be seen just above the upper roller of the clutch in Figure Number 13 drops into notches punched in the rack and prevents the selector from falling when it has been raised. An arm on the armature of the down drive magnet of the clutch withdraws the pawl when the selector is driven downward. The rack, brushes, and upper part of the clutches are clearly shown in Figure Number 14.

Corresponding terminals of the five brushes on

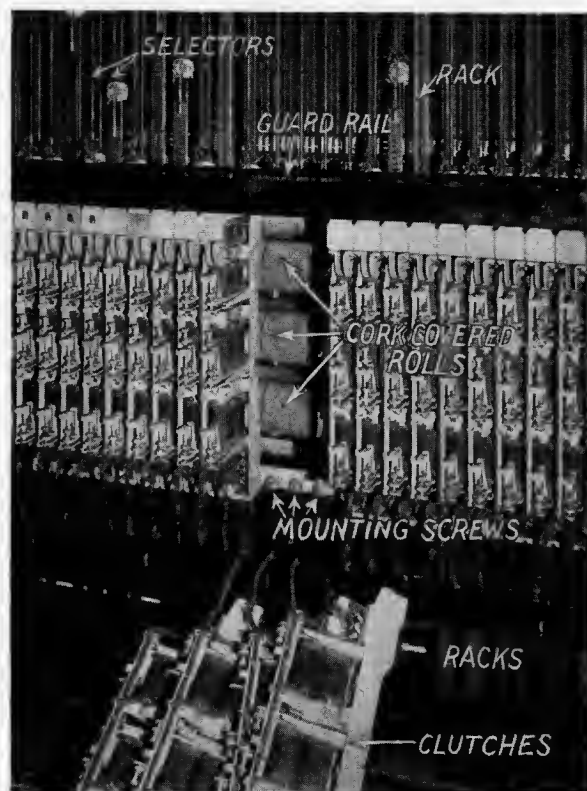


Figure 12

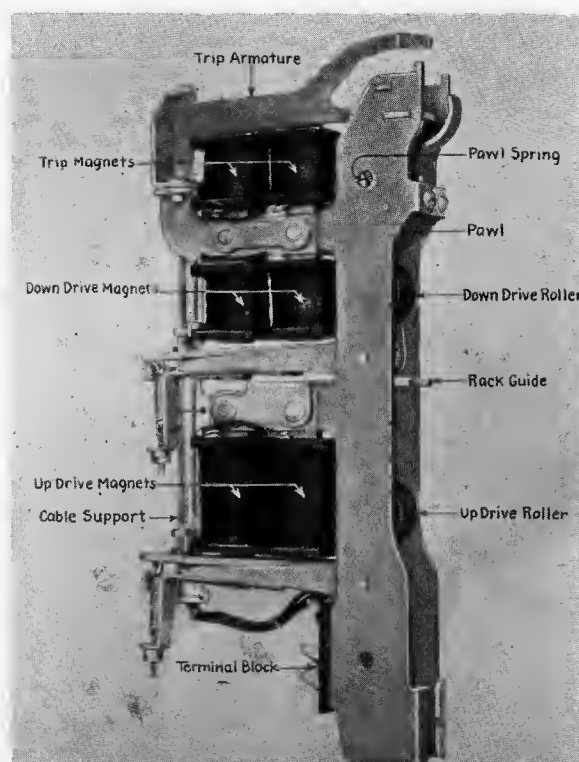


Figure 13

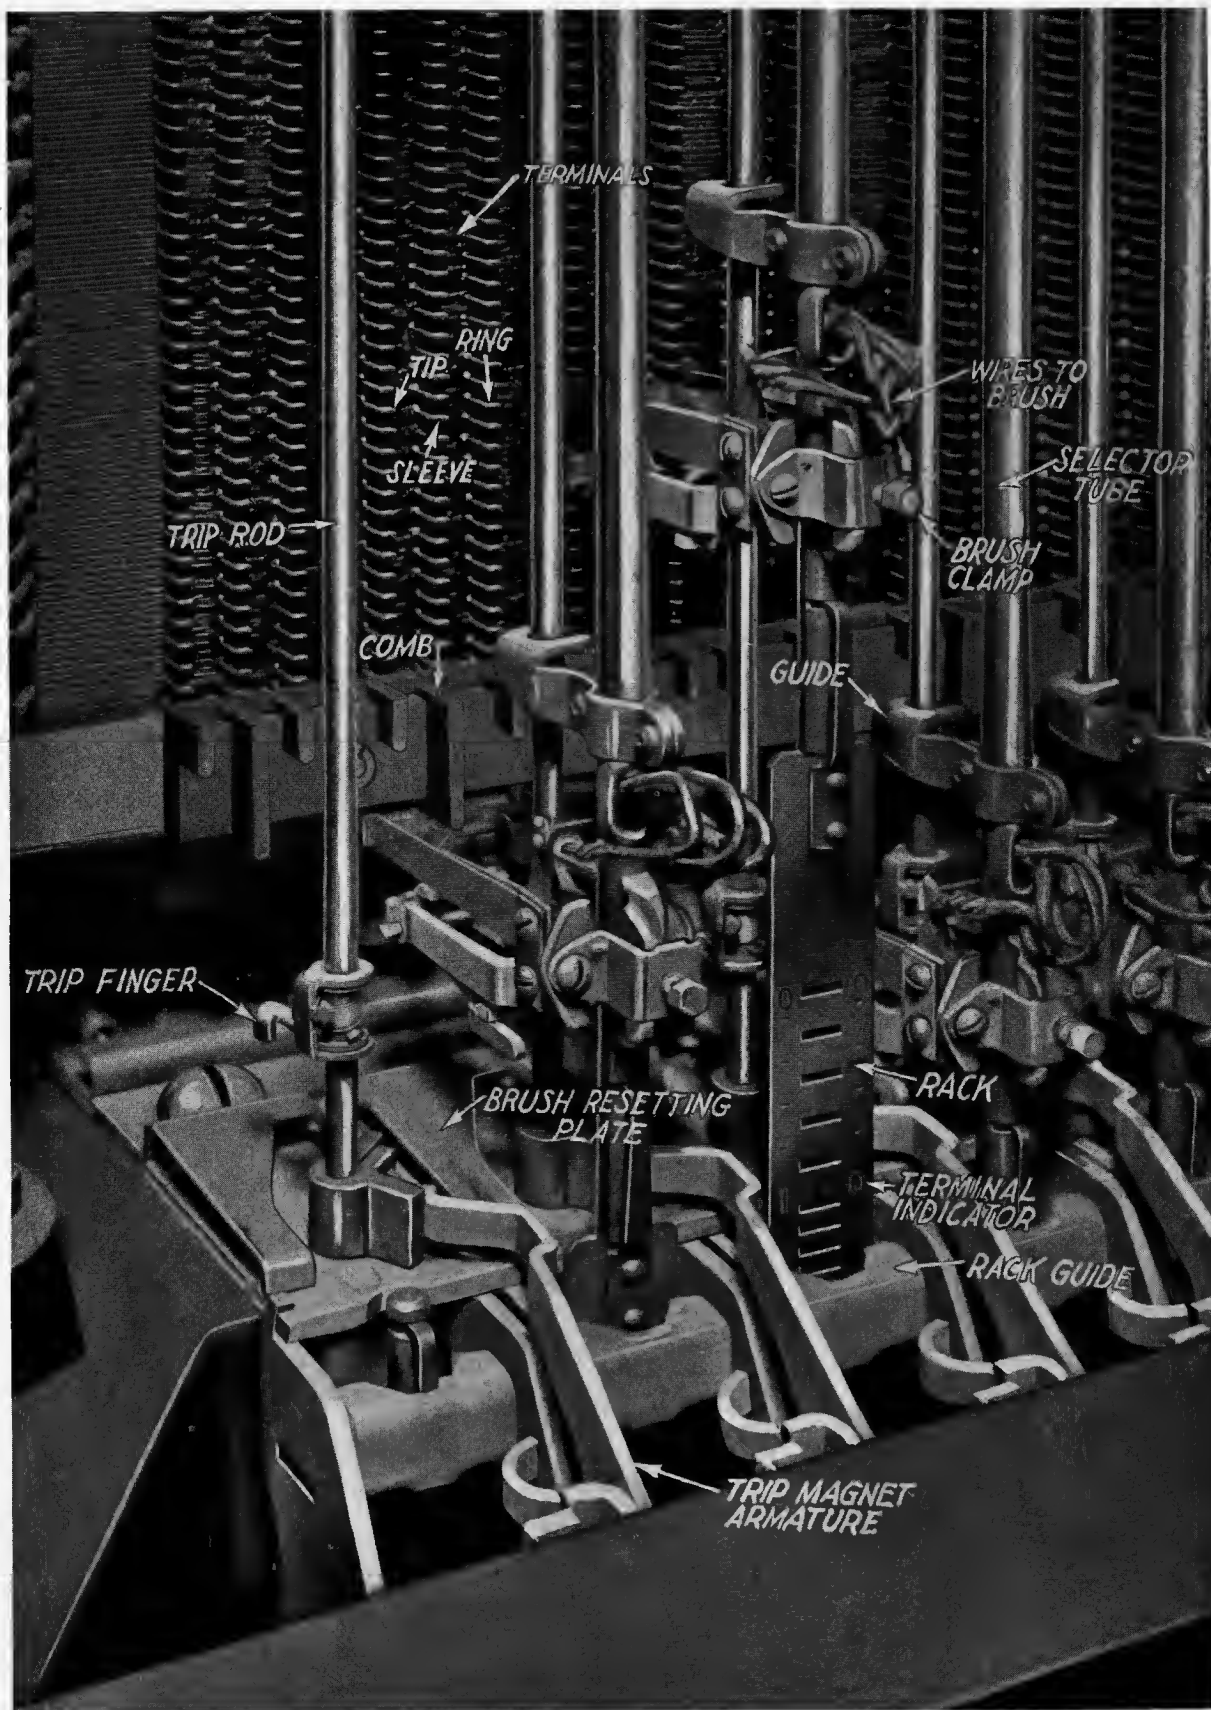


Figure 14
Panel Type Selecting Mechanism

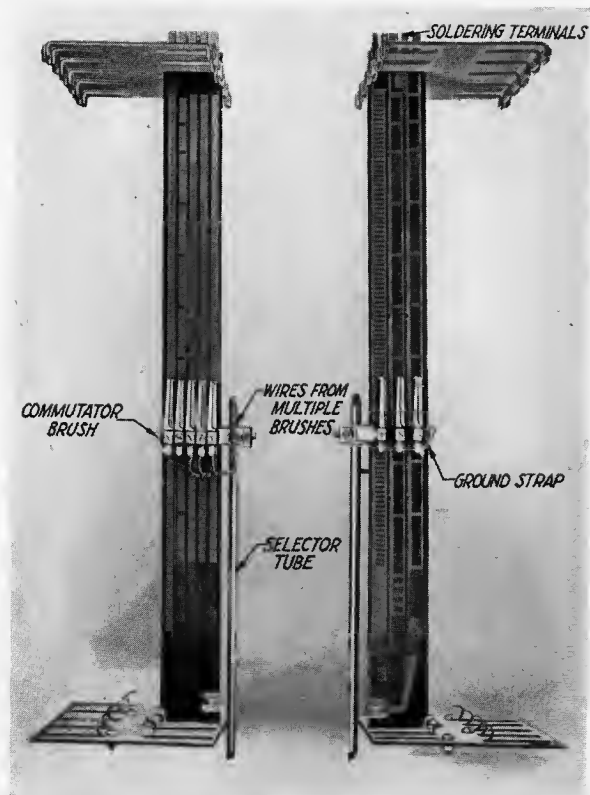


Figure 15

each selector tube are connected together by wires which pass inside the tube and come out at the top where they are connected to another brush

of different construction mounted at the extreme top of the tube. This brush slides on a "commutator" which consists of brass bars molded in insulating material and serves to conduct current which enters the commutator to the moving selector brushes. The commutator and the commutator brush also control electrically the movement of the selector, as will be described later. The commutator and commutator brush are shown in Figure Number 15.

The selector brushes which are shown in detail in Figure Number 16 do not normally touch the terminals, their fingers being held apart by two little hard rubber rollers which are forced between them. When the selector rises, no contact is made with any of the terminals unless one of the brushes is closed or "tripped" by withdrawing the rubber rollers which hold the brush open. Between each selector tube and its terminals and encircled by the fingers of the brushes is a small vertical brass rod arranged to be partially rotated by a magnet at the top of the clutch (see Figure Number 14). This rod carries five spring mounted latches and is called the "trip rod." Either in the normal position or when fully rotated, the latches of the trip rod do not interfere with the movement of the selector, but if the selector is raised to a certain point and the trip rod then rotated, one of the latches will catch on a projection of its

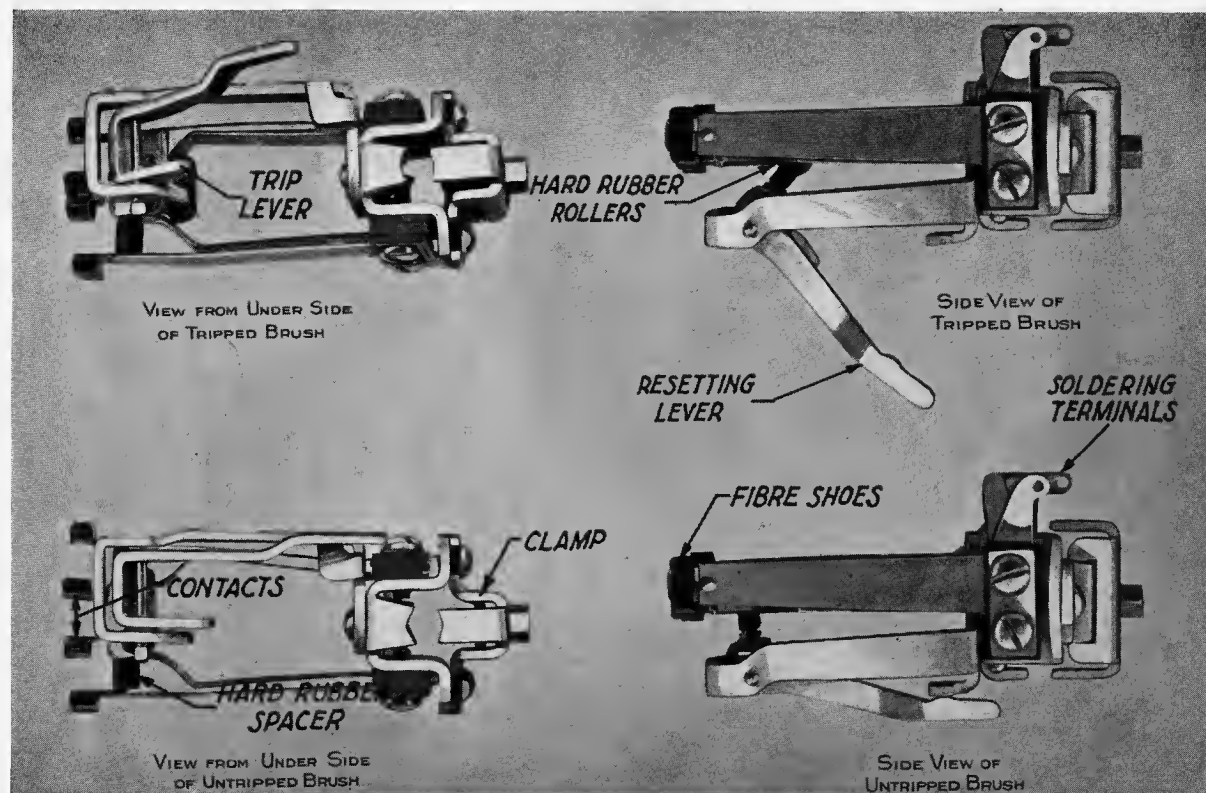


Figure 16

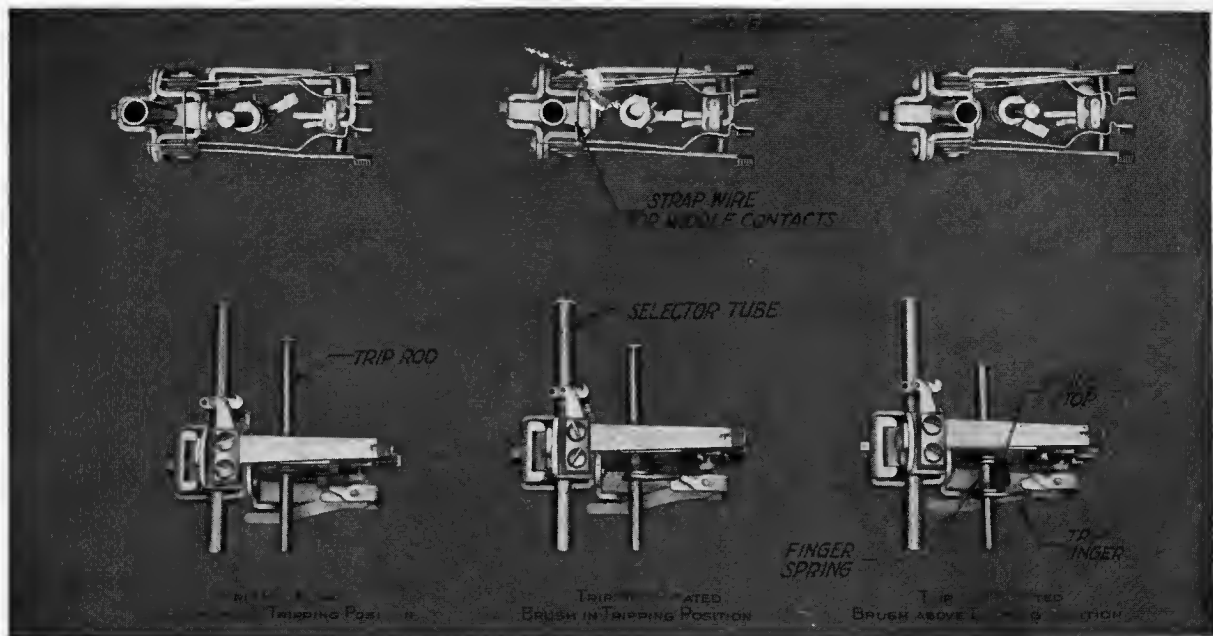


Figure 17

associated brush and be held there while the other latches continue to rotate with the trip rod. This projection is attached to the hard rubber rollers which hold the brush open and any further upward movement of the selector will now cause the hard rubber rollers to be withdrawn and the brush to close and make contact with the terminals of the bank. When the selector descends again a long trigger attached to the hard rubber rollers strikes the framework and restores the brush to its normally open position just as it reaches the lowest point of its travel. The various steps in tripping a brush are shown in Figure Number 17.

The brushes on the selector tube and the latches on the trip rod are placed equal distances apart but the latches are not the same distance apart as the brushes. There is, therefore, a certain position of the selector in which the first latch on the trip rod will, if the rod is turned, catch the projection on the first brush but in this position none of the other latches will catch the projections on the other brushes, being too high. Similarly, there is a certain position in which only the second brush will be caught, the latch for the first brush being too low and the latches for the other brushes being too high. This is shown diagrammatically in Figure Number 18. Thus by moving the selector up to a certain point before turning the trip rod, any one brush on that selector can be tripped but not more than one brush can be tripped at once. By this plan any terminal in any of the five banks can be reached by the selector

although the total travel of the selector is only the height of one bank.

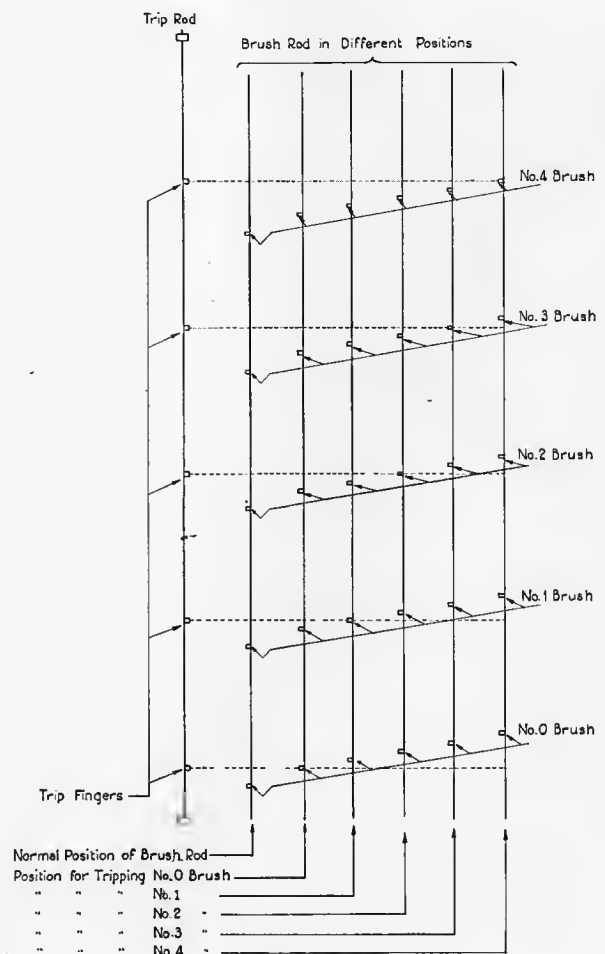


Figure 18

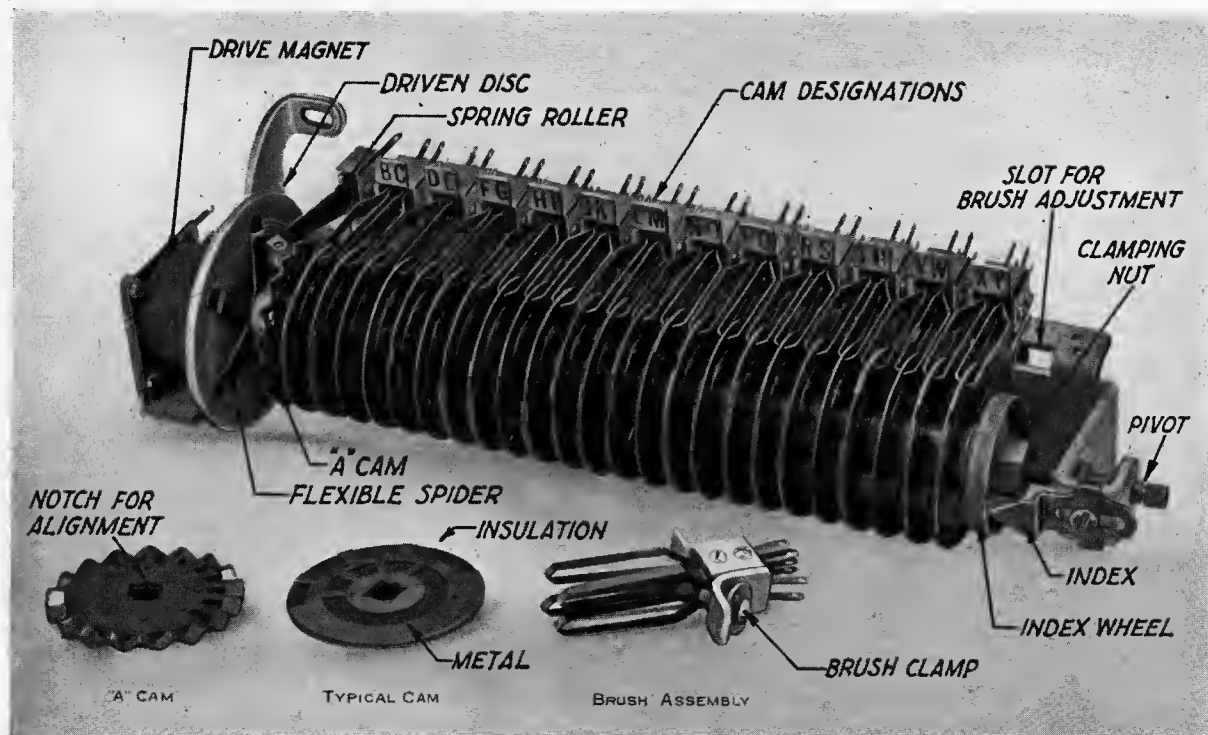


Figure 19

The Sequence Switch

The circuits which control the movements of panel type selectors are necessarily complicated and their operation requires the making and breaking of a large number of connections. Some of these connections are established or broken by means of relays. To reduce the number of relays required, a special form of switch called a "sequence switch" has been developed which, in general, performs the functions of a group of relays. Figure Number 19 shows one of these switches and Figure Number 20 a number of them mounted upon the framework. One of these switches is associated with each selector and the 30 switches associated with the 30 selectors on the front of the frame can be seen at the right of Figure Number 8. The 30 switches associated with the 30 selectors on the rear of the frame are mounted in a corresponding position at the right of the selectors on the opposite side of the frame. Switches of this type are also used for other purposes throughout the system.

The sequence switch is somewhat similar in principle to the controller of a street car. It consists of a number of discs or "cams," each composed of two plates of metal riveted one on each side of a disc of insulating material and all mounted on a square shaft which can be revolved. Four contact springs rest on each disc and a

fluted cam with a spring roller at the end of the shaft serves to hold the shaft in any one of eighteen positions which are indicated by a numbered wheel at the opposite end of the shaft. The metal plates are cut with irregular notches so that in certain positions of the shaft certain contact springs rest on the metal of the plates and others on the insulating material, while in other positions different springs rest on the metal and the insulation, respectively. Turning the shaft therefore serves to make and break the connections between contact springs in various combinations. As one of these switches will accommodate as many as 24 cams, each of which has four contact springs, there may be 96 separate wires connected to the switch, which by turning the shaft can be connected or disconnected in 18 different arrangements and each arrangement is capable of an almost infinite number of variations by changing the shape and size of the notches in the metal plates. Contacts may be made or broken simultaneously or separated by exact time intervals, a thing which it is difficult to do by means of relays.

The functions of a sequence switch in controlling a selector are enumerated in Figure Number 21. Position Number 1 is the normal position of the switch when the selector is not in use. As soon as

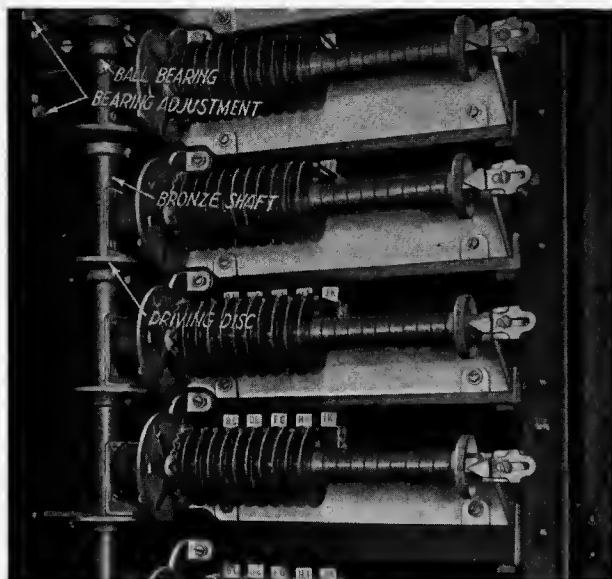


Figure 20

the selector has been chosen to be used in making a call, it is necessary to select an idle sender. This is not done by the sequence switch but it serves to make certain electrical connections for this purpose when it is turned to position Number 2. Until the idle sender has been found, nothing more can be done, so the sequence switch is turned to position Number 3, where the connections are arranged to wait for the sender. In the same way for each new operation to be performed the sequence switch is turned to a new position and in that position makes the proper electrical connections for that operation.

The sequence switch is turned by a friction drive mechanism at the end of its shaft. Next to the fluted cam is an iron disc mounted on a flexible bronze spider. With the sequence switch mounted

on the framework, this disc stands close to but not touching a horizontal iron disc on a vertical brass shaft which is constantly revolved by the same motor which drives the cork covered rollers for the selector drive. Close to the first disc is an electromagnet. When current is applied to this magnet the flexibly mounted disc is drawn against the revolving disc and the sequence switch shaft is driven around by friction. The current on the magnet is maintained by a contact spring on the fluted cam which does not allow the switch to

<u>D I S T R I C T S E Q U E N C E S W I T C H</u>	
<u>Position</u>	<u>Corresponding Circuit Condition</u>
1	Normal.
2	Selecting an idle sender.
3	Waiting for sender.
4	Selecting brush.
5	Waiting for sender.
6	Selecting group.
7	Waiting for relays.
8	Hunting idle trunk.
9	Waiting for sender.
10	Selection of brushes, groups, etc. beyond the district selector.
11	Waiting for sender.
12	Talking (non-loaded trunk).
13	Talking (medium-loaded trunk).
14	Waiting for operator to answer.
15	Talking to operator.
16	All trunks busy.
17	Operating message register.
18	Returning apparatus to normal.

Figure 21

stop until it falls into an insulated notch in the fluted cam. It is only necessary, therefore, to put current on the magnet momentarily and the switch will revolve to the next position at which there is a notch in the fluted cam. If there is no notch in a position the switch will not stop in that position. Each time the switch stops it is necessary to apply current momentarily to the magnet to make it turn to the next position.

Other Types of Apparatus

Figure Number 22 shows interrupters which are used for operating time measures, providing a busy signal, etc. A gear mounted at the top of the sequence switch driving shaft revolves a cam which moves back and forth a long bar, studs on which open and close a number of contacts. The lower interrupter in Figure Number 22 has a double reduction gear under the metal cover, so that it moves very slowly.

Another type of apparatus used in this system is the rotary switch shown in Figure Number 23. This switch has six rows of 22 terminals each, arranged in an arc, and a set of double armed brushes which wipe over the terminals. The

brushes are rotated by means of a magnet which actuates a ratchet and pawl, the brushes making one step by each operation and release of the magnet. The armature of the magnet also operates a set of contacts and with these connected in series with the magnet winding, the magnet when it operates opens its own circuit and drives the brushes around continuously in a series of rapid steps so long as current is supplied. This switch without the above contacts is used for various purposes where it is required to make one step each time the circuit is made and broken, such as recording the pulses from the subscriber's dial, or as a time measure, when it is operated by

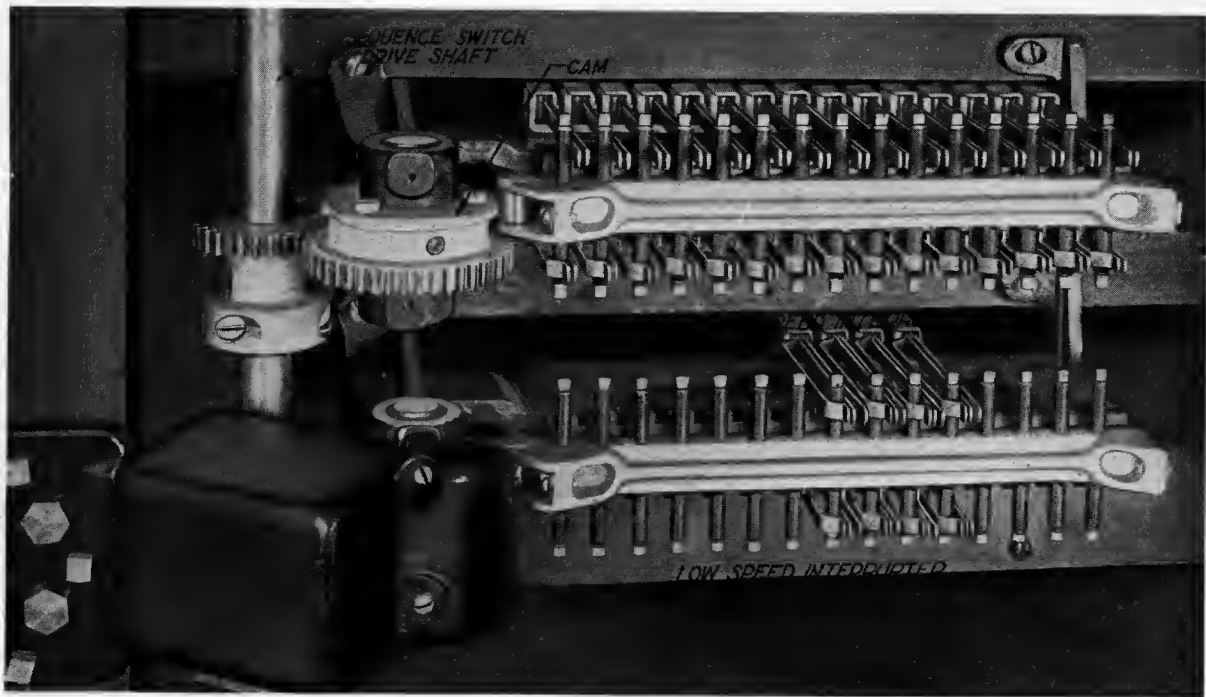


Figure 22

an interrupter which regularly opens and closes the circuit. With the contacts connected, it is used as a hunting selector, the current being applied continuously and being cut off by the switch itself when the brushes come in contact with the terminal for which the switch is hunting. Figure Number 24 shows a number of these switches mounted on a framework.

It should be observed that in all the above apparatus the contacts are made on vertical surfaces and are wiping. Such contacts free themselves from dust which would accumulate on horizontal surfaces and by the wiping action keep themselves clean and bright so that dust covers or dust-tight cases are not necessary.

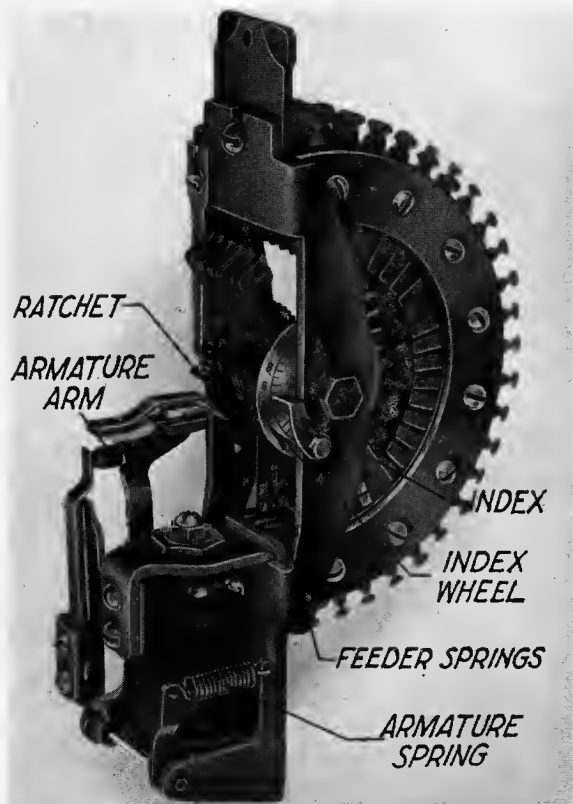


Figure 23

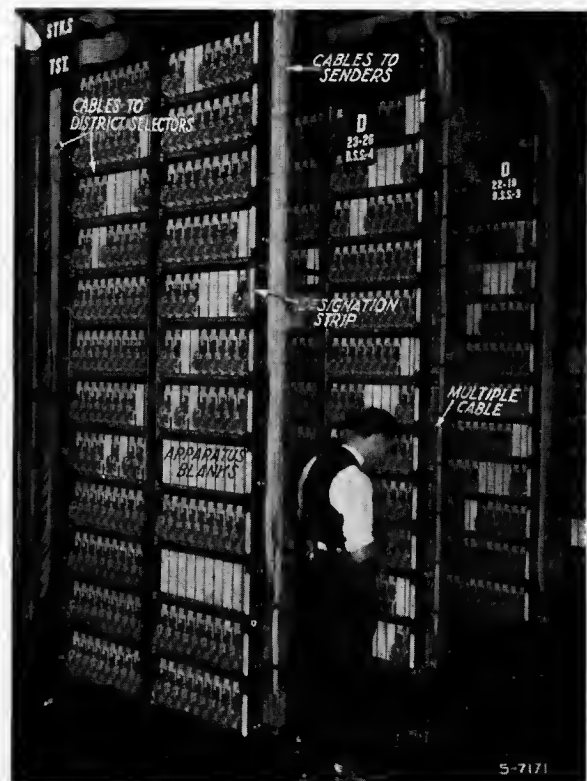


Figure 24

Method of Operation

Figure Number 25 shows the general plan of a call from one machine switching subscriber to another. The rectangles represent the terminal banks of panel type selector frames and the vertical lines with arrowheads represent selectors. When the subscriber removes his receiver from the hook he permits current from the central office to flow through his line, operating a line relay, one of which is provided in each subscriber's line. The operation of this relay causes a line finder selector to start and to move upward until it finds the calling line. This connects the district selector associated with the line finder to the calling line. The district selector is the path by which the call must pass outward and it may be likened to the calling cord of a manual cord circuit, while the line finder performs the functions of the answering cord.

Each line finder selector is cabled permanently to a district selector. A third leg of the circuit extends to the sender selector, which is a rotary switch. Sender selectors are shown in Figure Number 24. As soon as a line finder starts to hunt for a calling line, the attached sender selector hunts for an idle sender. When both the line and the idle sender have been found, a tone called "dial tone" is sent to the subscriber as an indication that the apparatus is ready for him to dial. The subscriber then dials and the pulses of current from his dial are recorded in the sender, which then controls the movements of the other selectors in a manner which will be described later.

The district selector may connect the subscriber's line to a trunk to the distant office that he is calling. The 450 trunks which can be reached by a district selector are, however, not enough in large districts to provide sufficient trunks to all the offices which a subscriber may call. In this case, the district selector connects the subscriber's line to a trunk leading to an office selector which can reach trunks to the office called. Each group of office selectors can reach 450 trunks, so that by providing a number of groups of office selectors, trunks can be provided to any number of offices. The trunk to the distant office terminates there on an incoming selector. If the incoming selector selected the terminals of the subscriber called, only 500 subscribers could be reached, as only 500 lines can be connected to a panel type selector frame. Each office is arranged for 10,000 stations, so that 20 selector frames or groups of selectors are required to reach all the stations, each selector frame or group of selectors reaching a certain 500

stations. The incoming selector, then, is arranged to select a trunk to a final selector on one of these 20 frames and the final selector selects the station desired.

Not all calls will be for subscribers in distant offices. If a station in the calling subscriber's own office is called, the district selector may route the call directly to an incoming selector in the calling subscriber's own central office. On certain calls, such as toll calls, and calls for information, or if the subscriber wishes assistance, it will be necessary for him to be connected to an operator. This is accomplished by the district selector, which instead of choosing a trunk to an office selector selects a trunk leading to a jack in a switchboard where the call is answered by an operator. Calls of this character, calls for subscribers in manual central offices, and calls coming into the office from manual central offices will be described later.

Each of the various selectors mentioned above has certain peculiarities which adapt it to its particular functions. Figure Number 26 shows a frame of line finders. It will be seen that the line finder is a panel type selector but differs from the general type in having 15 small banks, each 20 sets of terminals high, thus accommodating 300 subscribers' lines. (A later design has 10 banks, each 40 sets of terminals high, taking care of 400 subscribers' lines.) In these banks four terminals are provided for each line instead of three as in other panel selectors. The object of the small banks is to reduce the travel of the selector and therefore to reduce the time required for the selector to reach the terminals of the calling line. This time is further reduced by dividing the bank in half and reversing the order of the terminals in half of the bank so that a line whose terminals appear near the top in the left-hand half of the bank appears near the bottom in the right-hand half. To find the calling line a selector is used which has the shorter distance to travel unless all such selectors are busy, when one of the other selectors will be used. Instead of a vertical trip rod for each selector, the line finder has a horizontal trip rod for each bank. The trip rod associated with the bank in which the calling subscriber's line appears will trip the corresponding brush of any selector which rises when the subscriber removes his receiver. The trip rods and the magnets which operate them can be seen at the right of Figure Number 27. The circuits are arranged to prevent two or more lines calling at the same moment from interfering with each

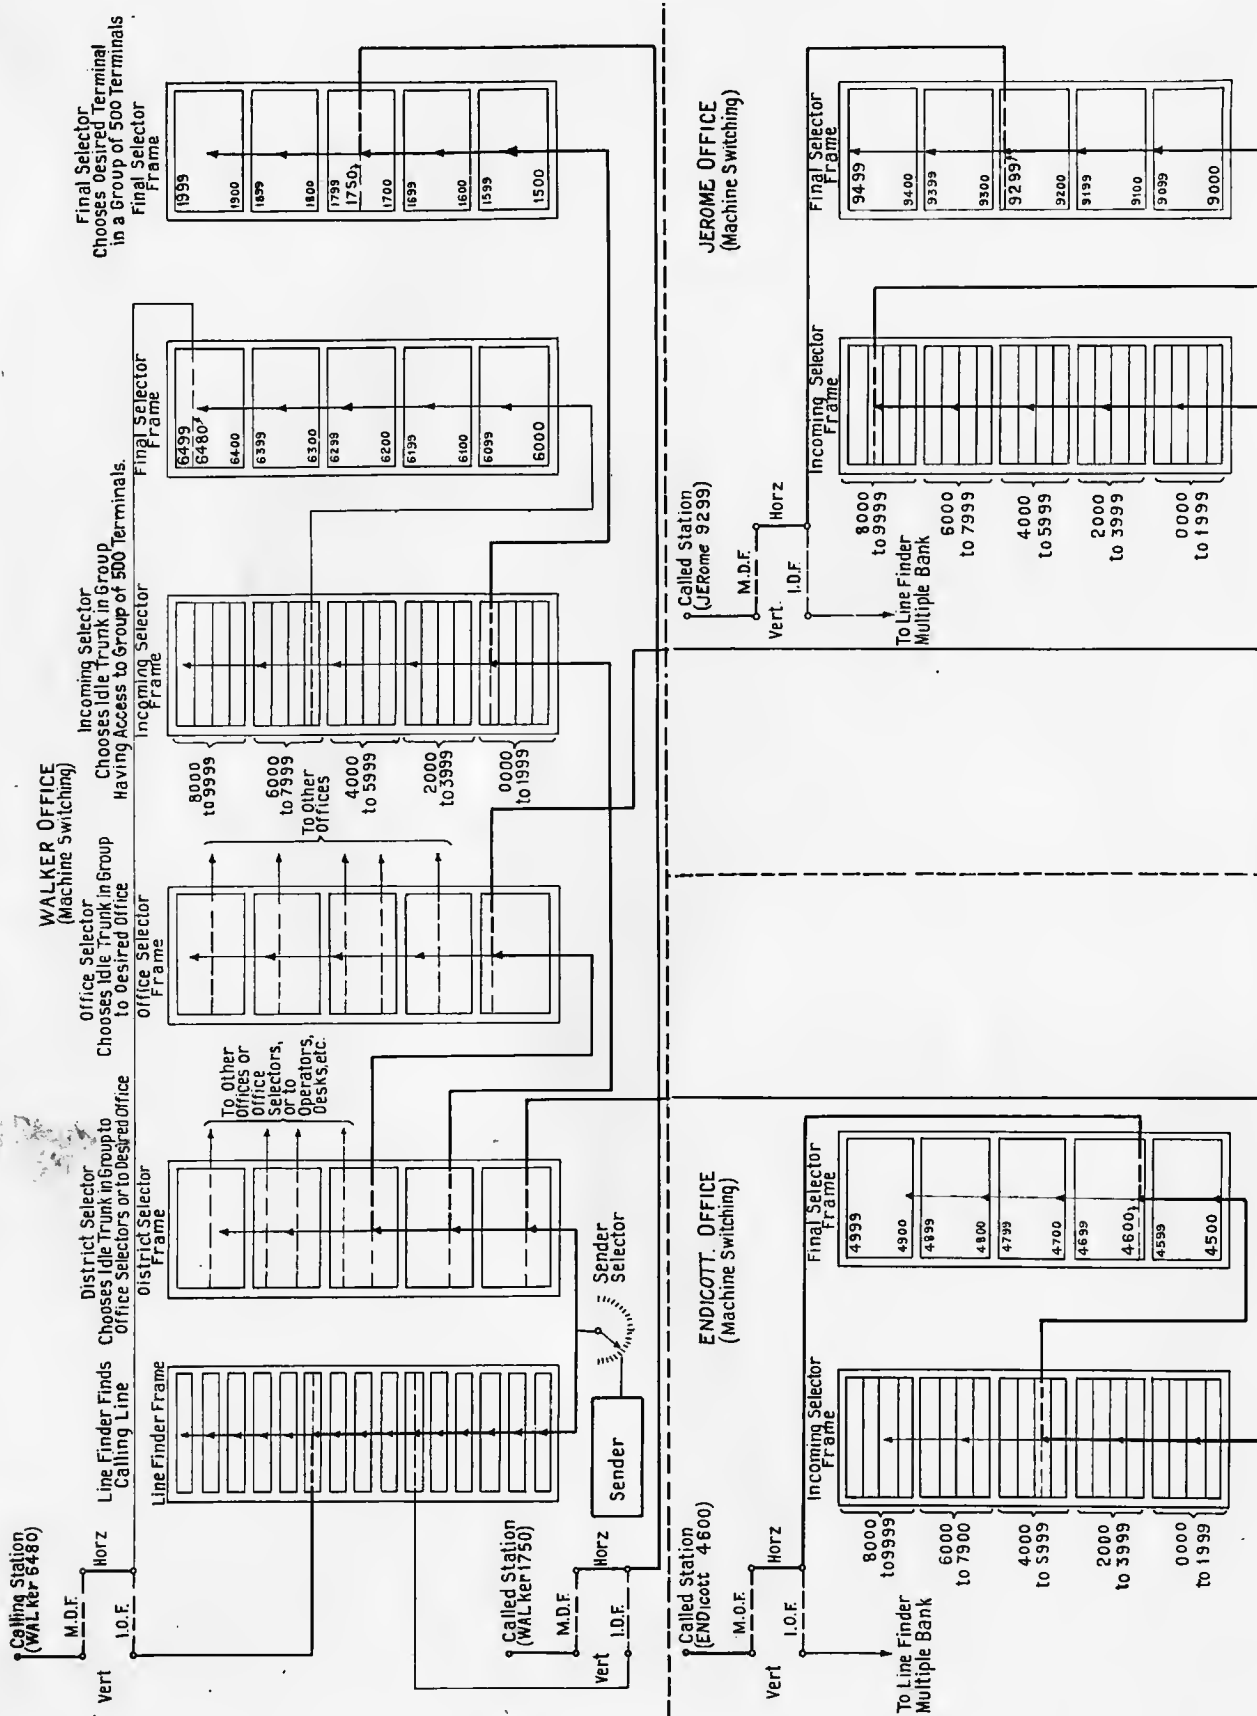


Figure 25
Plan of Direct Mechanical Connections

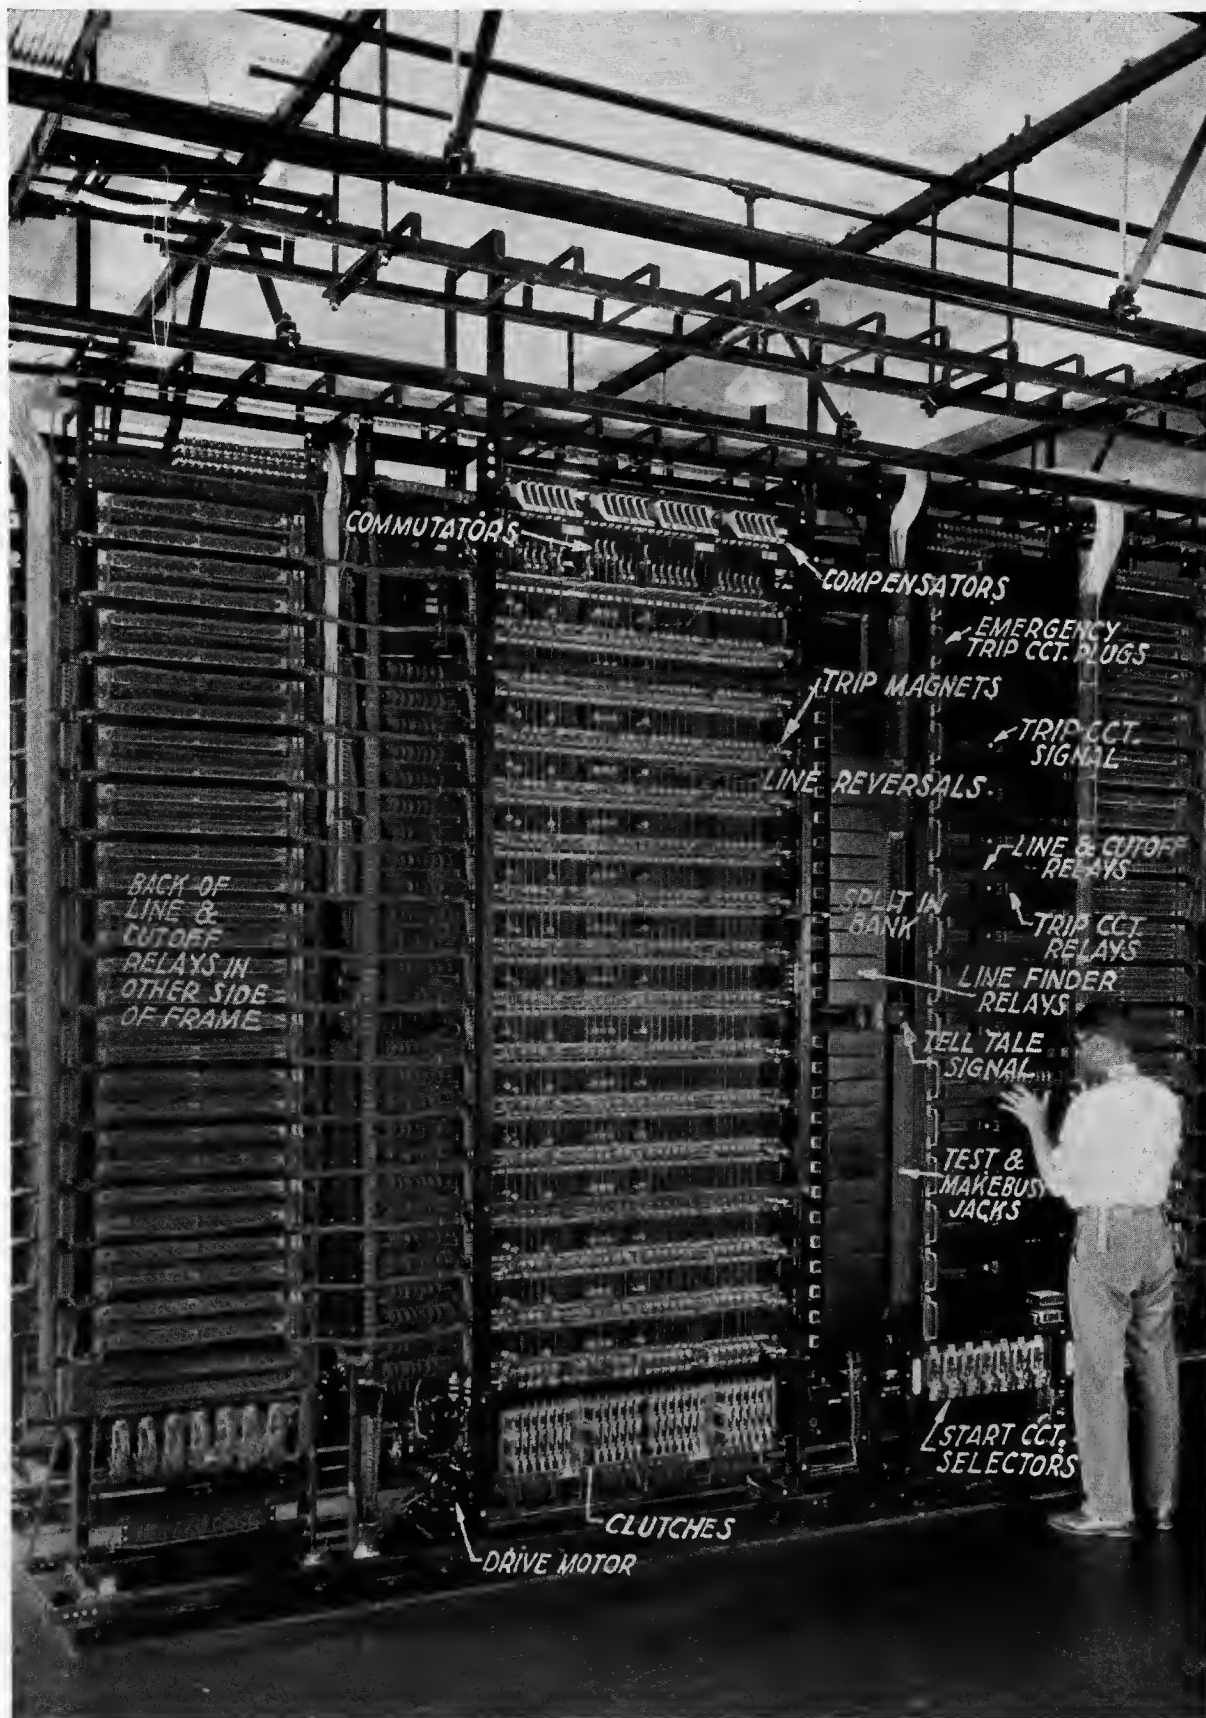


Figure 26
Line Finder Frame (300 point)

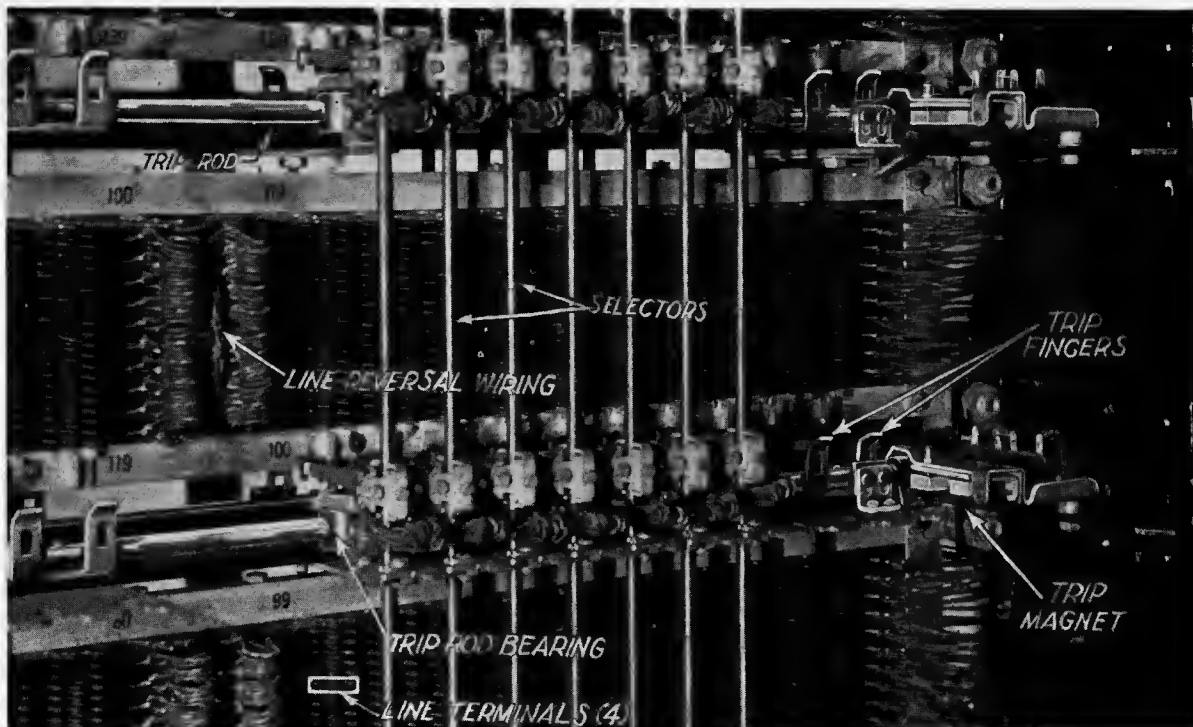


Figure 27

other and yet to insure that each line calling is attended to promptly.

District selectors are typical panel type selectors similar to those shown in Figure Number 8. In Figure Number 28 the large rectangles represent the five banks of terminals and the smaller rectangles represent ten trunks each, except at the top of each bank where there are two groups of five trunks each. Every eleventh terminal and an additional one between the two groups of five trunks at the top of the bank is arranged as an overflow terminal for use when the ten trunks below it are all busy. The trunks can be used in groups of any size from 10 to 90 in multiples of 10 and by using the groups at the top of the banks, trunk groups of only 5 trunks can be obtained. When a trunk group larger than 10 is used the intermediate overflow terminals are made busy, so that the selector passes right over them. The size of the group to be used for any particular purpose depends, of course, on the volume of traffic to be handled. Figure Number 28 shows that trunks may be provided from the district selector frame to other offices, to groups of office selectors, to toll boards, to operators, etc. The district selector circuit is provided with a repeating coil through which is supplied the talking current for the calling subscriber.

The office selector is mechanically similar to the district selector and operates in the same manner.

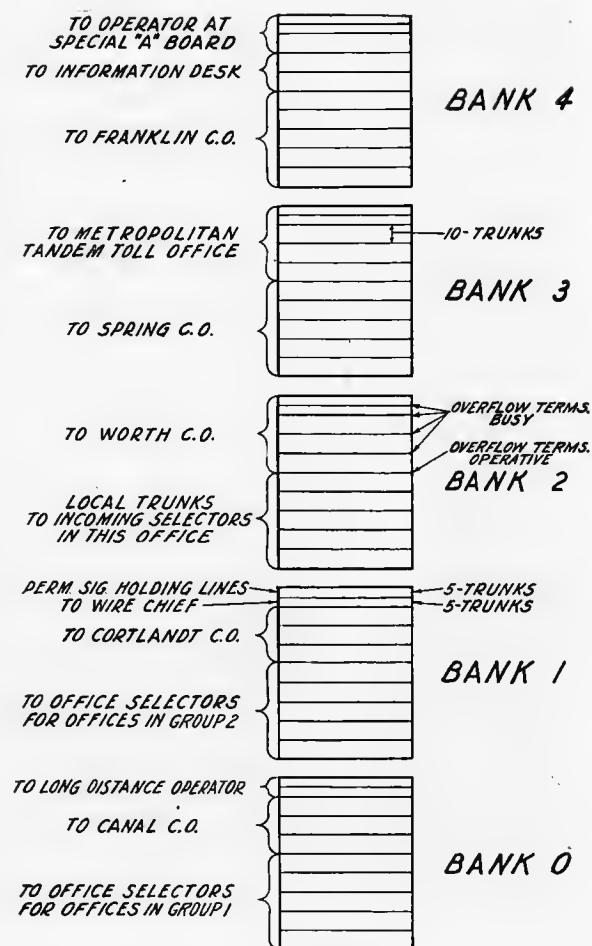


Figure 28

The trunks to the distant central offices terminate in those offices on incoming selectors. These are typical panel type selectors but each bank is divided into four groups of 24 trunks. Each of these groups gives access to a certain 500 subscribers' terminals in the office, as shown in Figure Number 29. On all incoming frames, trunks in the same relative location lead to the same group of 500 subscribers' terminals and the numbering plan is the same in all offices.

line are reversed, so that when he is called the generator current is sent out on the tip side of the line and ground on the ring side. In offices having 4-party lines with selective ringing, superimposed ringing current is provided. The generator cur-


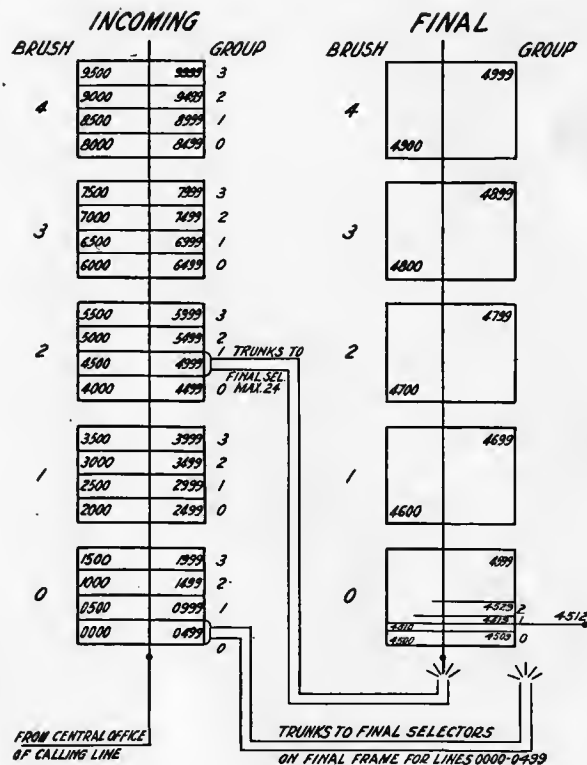


Figure 29

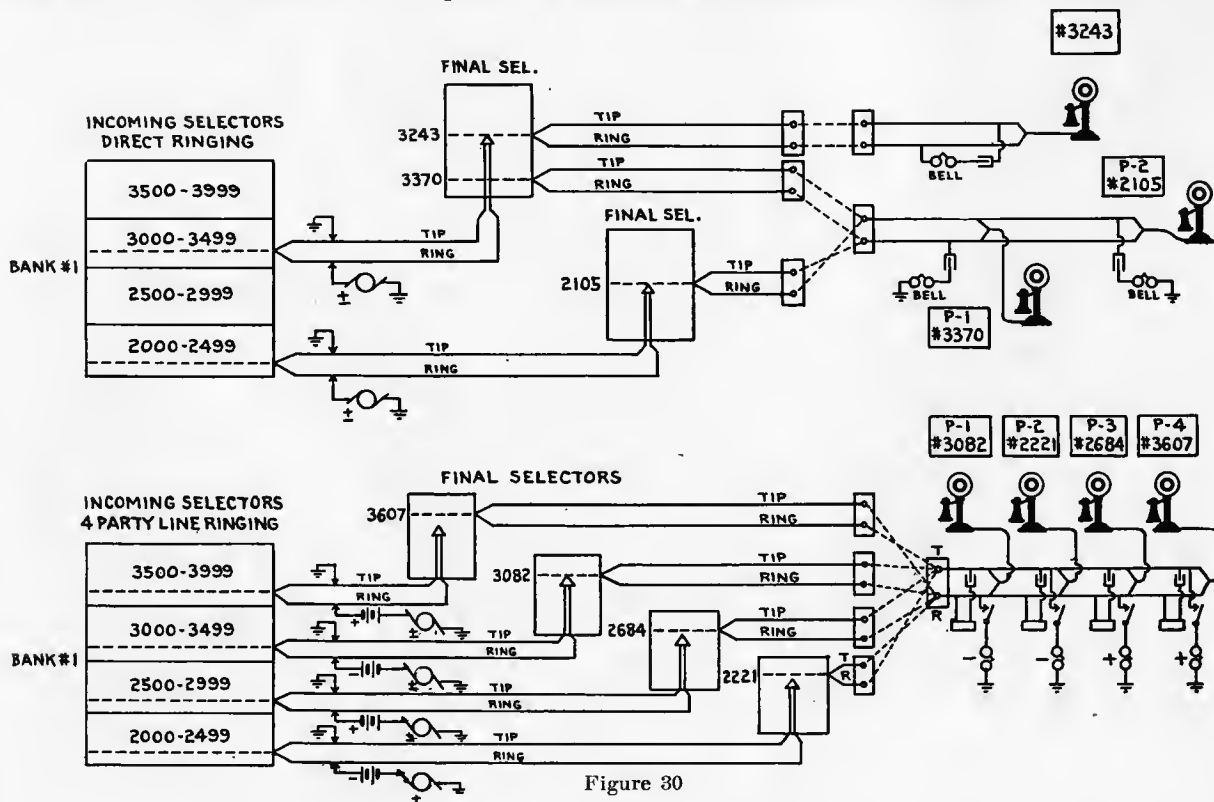

rent is always on the ring side of the circuit of the incoming selector and ground on the tip side, but there is a bar on the commutator which causes the superimposed direct current to be negative when the selector is stopped on any of the terminals of the first and third groups of trunks in each bank of the incoming selector frame and positive when the selector is stopped on any of the terminals of the second and fourth groups. The bells of two of the parties on the line are connected from the ring side to ground and biased to respond to positive and negative superimposed current respectively. The bells of the other two parties are connected from the tip side of the line to ground and biased also. Party Number 1 is rung by negative superimposed current on the ring side of the line and party Number 3 by positive superimposed current on the ring side of the line. Parties numbered 2 and 4 require negative superimposed current on the tip side and positive superimposed current on the tip side, respectively. For these latter parties the connections of the final terminals to the line are reversed. It will be necessary, then, that parties Number 1 and Number 2 have numbers which can be reached by the trunks in the first and third groups in any bank of the incoming frame, while parties Number 3 and Number 4 must have numbers that can be reached by the second or fourth groups. That is to say, any telephone which is party Number 1 or Number 2 on a 4-party line must have a number chosen from 0000-0499, 1000-1499, 2000-2499, etc., while any telephone which is party Number 3 or party Number 4 must have a number chosen from 0500-0999, 1500-1999, 2500-2999, etc. The numbers of the four parties on one line, however, bear no

further relation to each other. Figure Number 30 shows this system of ringing.

The incoming selector circuit, like the district selector circuit, contains a repeating coil through which is fed the talking current for the called subscriber and the current for the trunk between the two offices.

The trunks from the incoming selector frame terminate on final selectors. These differ very little from the typical panel type selectors but each set of terminals in their banks represents not a trunk but a subscriber's station and as no overflow terminals are required, 500 subscribers' stations can be reached by each selector. District, office, and incoming selectors are directed to the beginning of a group of trunks and then automatically hunt through that group for an idle trunk. Final selectors are directed to a certain group of 10 subscribers' stations and then must be directed to the particular station called. As the sets of terminals are only 1/8 of an inch apart, the final selector must move slowly when being directed to the particular station. For this reason, final selector frames are provided with a third cork covered roll which turns at about 1/4 the speed of the other rolls and drives the selector during the selection of the set of terminals representing the called subscriber's station. The final selector tests the line on which it stops and if it finds the line busy it returns to normal and sends back a busy signal. If a subscriber has a private switchboard with several consecutive lines, the final selector will stop on the terminals of the line the number of which was dialed, but if it finds that line busy, instead of returning the busy signal it

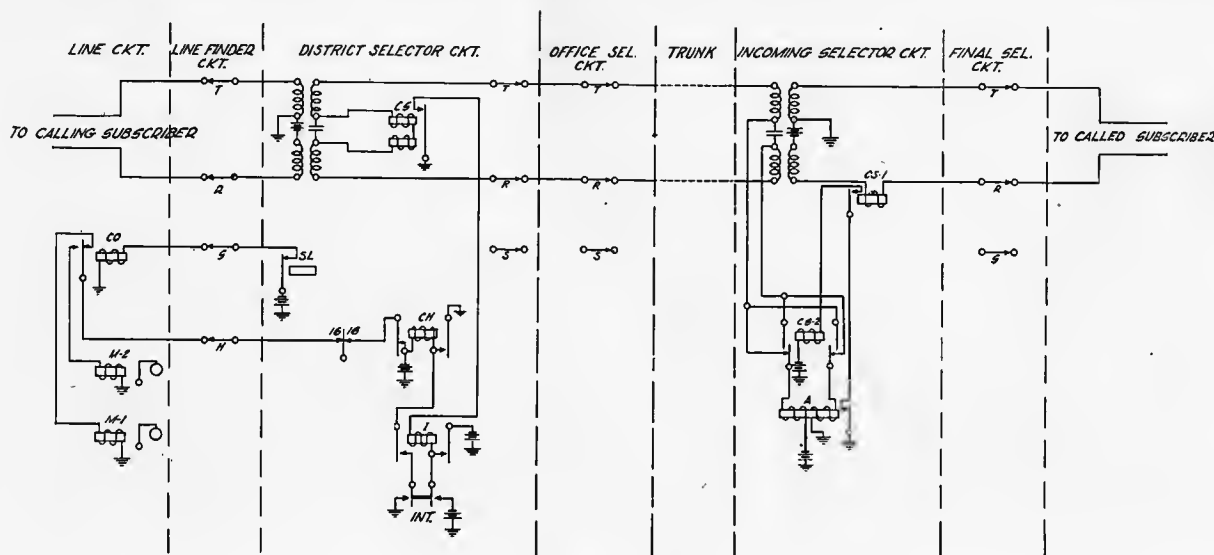


Figure 31



Figure 32
Photographing the Message Registers

Rescribed briefly - (page 767)

will continue to the next line and not give a busy signal unless it finds all the consecutive lines of that subscriber busy. As soon as the selections on the final frame have been completed, the sender which has been controlling the movement of the selectors is released so that it may be used by another subscriber and if the line wanted is found idle, ringing current is applied at the incoming selector, as previously described. When the called party answers, the circuits are cut through for talking.

The release of the connection is under the control of the calling subscriber. When he hangs up his receiver, all of the apparatus involved in the call, with the exception of the final selector, returns to normal. After a predetermined interval the final selector also returns to normal. Should the called subscriber hang up his receiver, but the calling subscriber fail to do so, the apparatus will not be released but after a given interval the Maintenance Force will be advised of this condition by an alarm.

Message rate service is given with the panel type system and the message registers are operated automatically by the apparatus. The scheme of operation is shown in Figure Number 31. The answer of the called party causes the operation of relay "CS-1," which causes the relay "CS-2" to operate, relay "A" being, of course, operated as long as the connection is made. The operation of relay "CS-2" reverses the current in the trunk

between the two offices. This causes the operation of relay "CS" which, being polarized, would not operate until the current was reversed. Relay "I" is now operated when the interrupter makes its right-hand contact. Relay "CH" is operated when the interrupter makes its left-hand contact, provided that relay "I" is still operated, which it can be only if the called subscriber still has his receiver off the hook. As the interrupter makes its left-hand contact approximately two seconds (in New York) after its right-hand contact, the called party must answer for at least two seconds for the call to be recorded. The "CH" relay being operated, the cam of the district selector sequence switch when it passes through position Number 16, which it will do after the completion of the conversation and the release of the apparatus, operates the message register.

The telephone of party Number 2 on a 2-party line is arranged to put ground on the line whenever his receiver is off the hook. This ground will cause the "SL" relay to be released, allowing the "CO" relay to release also and connecting the second message register to the "CH" relay when the call is made by this party. Message rate service is not given on 4-party lines.

The registers are mounted in a cabinet behind locked glass doors. Each month they are photographed with a special camera, as shown in Figure Number 32, and from this photographic record the charges to the subscriber are computed.

The Sender

In describing the method of making a connection a description of the operation of the most important feature of the panel type system has so far purposely been omitted so that this feature may be especially emphasized. It will be remembered that it was stated that in the panel type system, direct control of the selectors by the subscriber's dial and numerical selection have both been abandoned so that it is necessary to provide some mechanism which shall record the number as dialed by the calling subscriber, hold it, interpret it into terms of brush and group selection, and control the selectors in accordance with it. This mechanism as provided in the panel type system is known as the sender, and it and its associated apparatus constitute the most salient and distinctive features of this system. The sender with its associated mechanism of translator and pulse machine is the "brains" of the panel system and a thorough understanding of its functions and operation is essential.

Figure Number 33 shows a frame of subscribers' senders. The equipment for 5 senders is mounted on this frame. Each sender comprises the relays and other apparatus mounted in one of the metal cabinets and the 11 rotary switches and 6 sequence switches mounted to the right and left of the cabinet. A sender therefore is not a machine but an electrical circuit containing rotary switches, sequence switches, resistances, condensers, and relays.

The description of the operation of the sender will be divided into two parts: that due to the dialing of the office code, and that which results from the dialing of the called party's number. For the time being we will consider that the calling subscriber has dialed the office code and that it has served to obtain for him a connection to an incoming selector at the distant office in which is located the line of the subscriber with whom he desires to speak. The calling subscriber is now about to dial the number. Each full mechanical

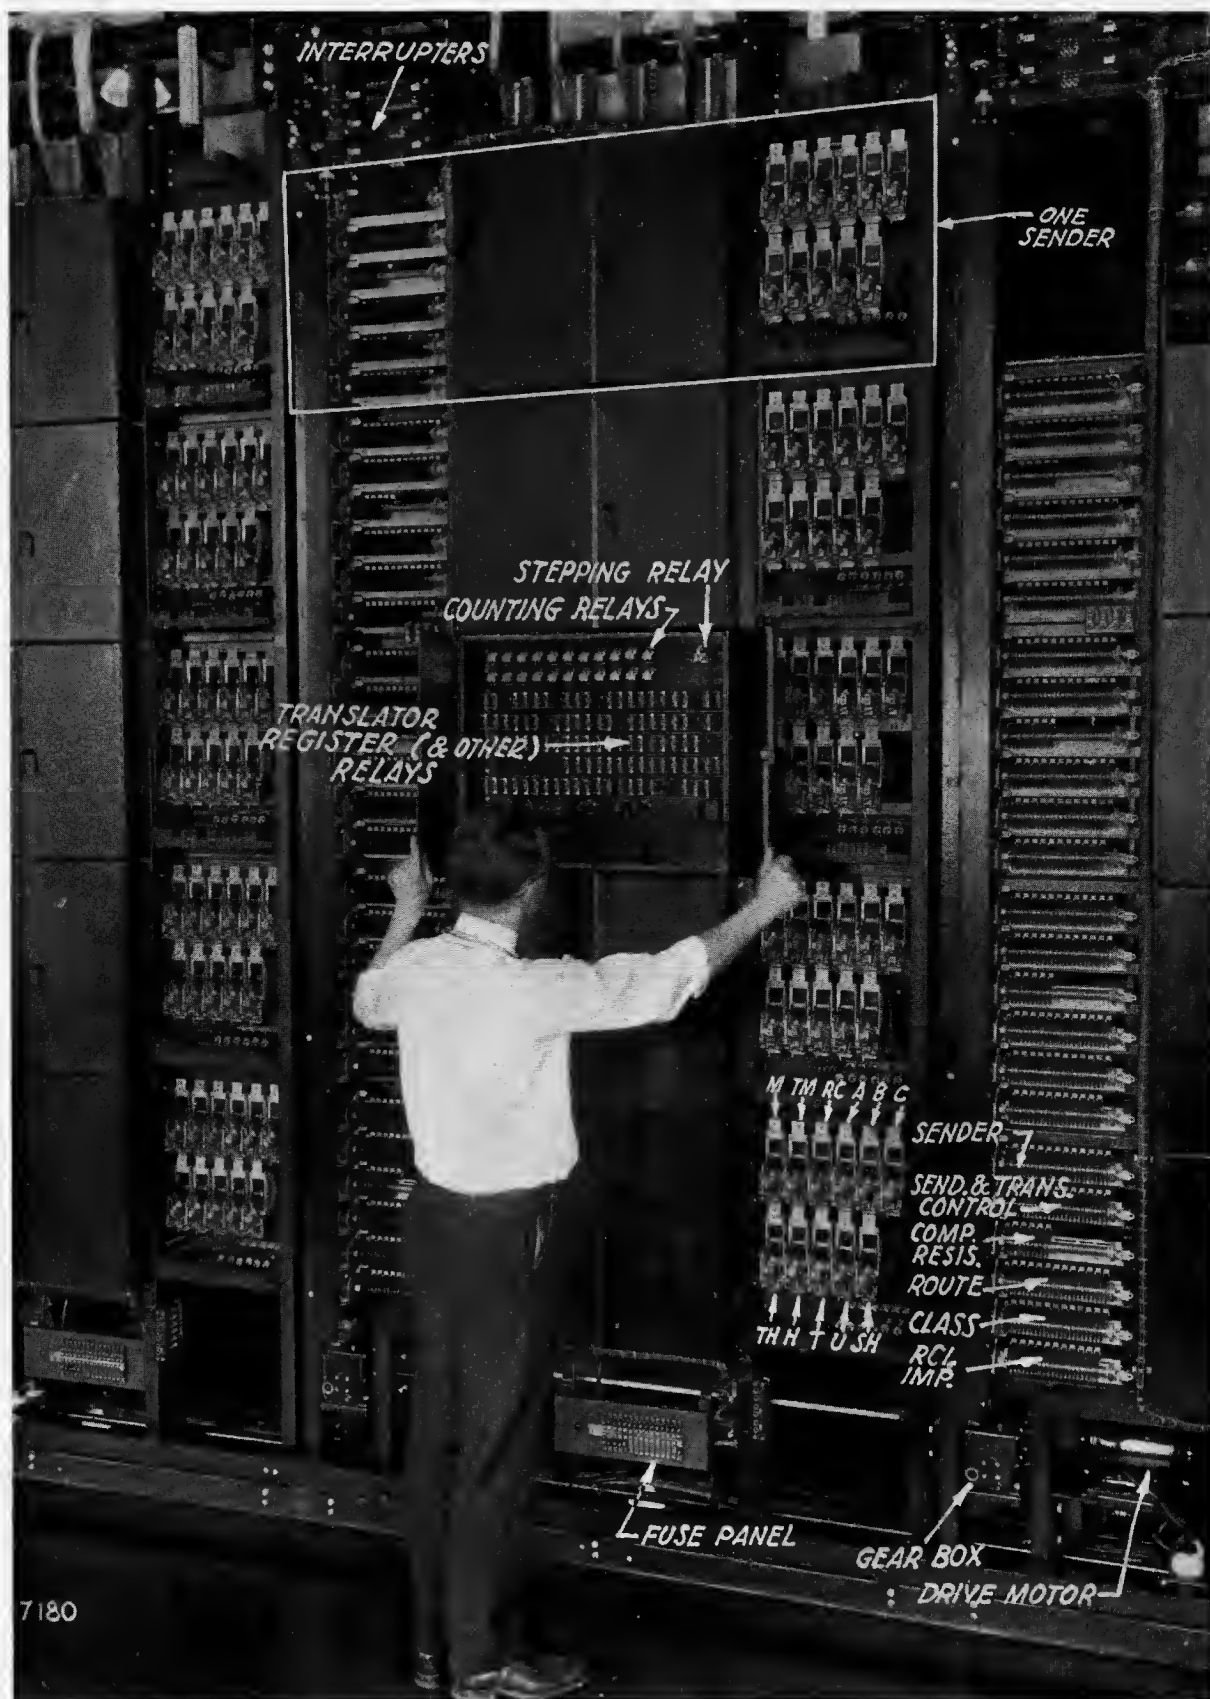


Figure 33
Subscriber's Sender Frame (3 Digit—Unit Type)

office is arranged for a maximum of 10,000 subscribers' stations so that each station will be given a number of 4 digits. It is always necessary to dial at least 4 digits. If the subscriber desired number 0353 but dialed 353 the sender would be unable to determine whether or not he intended to dial another digit. The digits dialed by the subscriber are recorded by rotary switches which make one step for each contact of the dial. Four of these register switches are used to record the number, one for the thousands digit, one for the hundreds, one for the tens, and one for the units. The transfer of the calling subscriber's line from one register to another is effected by a slow release relay, as previously mentioned, this relay, however, effecting the transfer by means of another rotary switch designated "register control." When the four registers have been set by the subscriber's dialing, they determine the movement of the incoming and final selectors to find the terminals of the called party.

The movement of the selectors is determined by what might be termed "reverse control." The selector, instead of being made to move a certain distance by the sender, is driven continuously upward and sends back pulses of current to the sender. These pulses are sent by the commutator of the selector and are counted by the counting relays of the sender. When a sufficient number of

pulses has been sent back by the selector it is arrested. The number of pulses to be sent before the selector is stopped is determined by the number of counting relays included in the circuit and this is determined by the setting of the registers.

A complete description of the operation of the circuits of the panel type system is beyond the scope of this paper. No attempt will be made to trace any of the actual circuits and it must be understood that where a circuit is shown it is diagrammatic and contains only such portions as are necessary to demonstrate its operation when performing one particular function. Figure Number 34 is a simplified circuit showing one arc of one of the rotary register switches, some of the relays in the sender, and parts of the selector which is being controlled by the sender. The sender is shown controlling an incoming selector for the selection of the brush to be tripped. The dashed line separates the apparatus in the incoming selector from that in the sender. It should be noted that the sender is in the office of the calling subscriber, while the incoming selector is in the office of the called subscriber. When the contacts marked "B" are closed by the sequence switch the "L" relay is in an operated position (having been previously operated) and is held operated by the path through the stepping relay. The upward drive clutch of the selector also receives

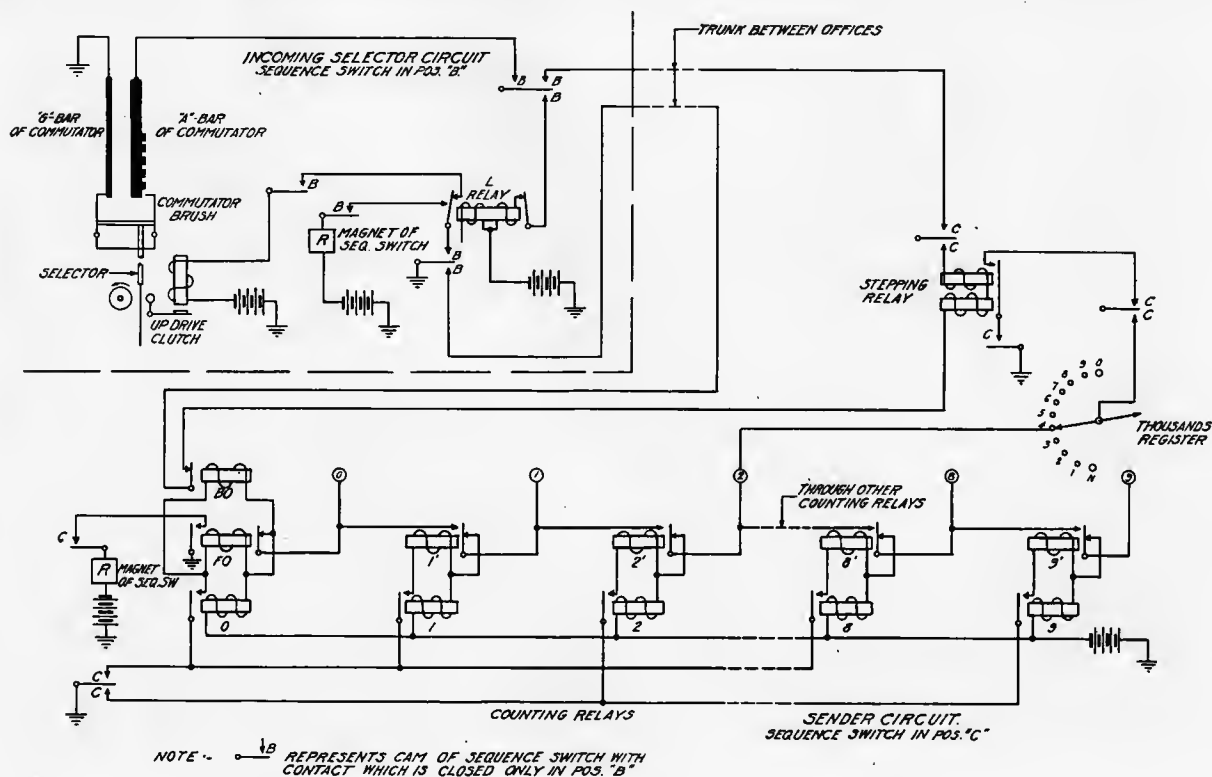


Figure 34

current through the contact of the "L" relay and therefore drives up the selector. It will be seen that every time the commutator brush passes over a metal segment in the commutator another path is formed for the current through the "L" relay, which shunts out the stepping relay. The "L" relay is held continuously operated, either by the path through the stepping relay or by that through the commutator, while the stepping relay is operated whenever the commutator brush rests on insulation and released whenever the commutator brush rests on metal. The first operation of the stepping relay operated counting relay Number 2. When the stepping relay released due to being shunted out by the commutator, it removed the shunt around relay number 2', which operated and transferred the connection to counting relay Number 1. This operates when the stepping relay comes up again and relay number 1' operates when the stepping relay releases again. The process is repeated each time the commutator brush passes over a metal segment and finally relays FO and BO are operated, cutting off the stepping relay altogether and causing the sequence switch of the sender (R designates the magnet of the sequence switch) to turn and release the counting relays which were held operated. The "L" relay is still held operated through the commutator but when the commutator brush passes off the metal segment, the "L" relay is released, cutting off the drive clutch and stopping the selector. This also causes the sequence switch of the incoming selector to turn, changing the connections of the selector for the next operation. This is the fundamental method by which the panel selectors are controlled for the selection of the brush to be tripped, for the group of trunks to be used, and, in the final selector, for the selection also of the terminals of the called party. The stepping relay is shown in Figure Number 35 and a counting relay in Figure Number 36.

We will suppose that the subscriber dialed number 4579. This means that brush Number 2 must be tripped on the incoming frame, since only

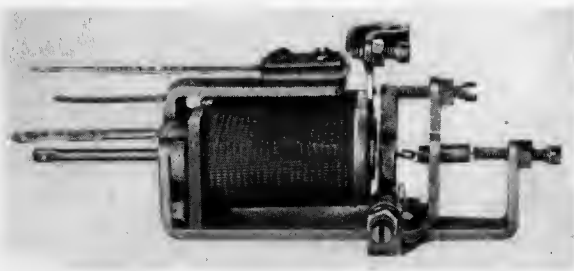


Figure 35


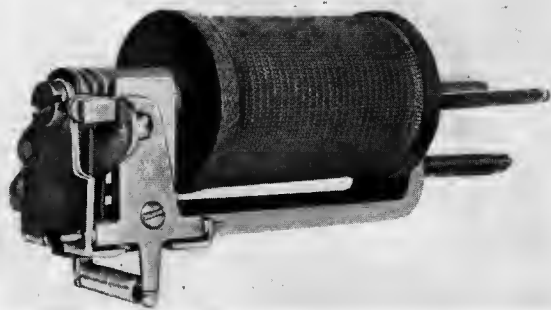


Figure 36

this brush has access to stations whose numbers begin with 4 (see Figure Number 29). To trip brush Number 2 the selector must rise until the commutator brush has passed over the third metal segment of the "A" commutator bar (see Figure Number 37). This is accomplished as just described. The selector being stopped, the sequence switch of the incoming selector causes the trip rod to rotate and the selector to start again. The upward movement of the selector trips the brush. Group Number 1 of trunks must be selected, since only this group leads to stations whose numbers begin 45. The setting of the thousands and hundreds registers together determine this, for had the number begun 55 it would have been necessary to trip the same brush but to select a different group of trunks. The selector is allowed to rise past the second metal segment of the "B" commutator bar and the brush will then be at the beginning of the second group of trunks. It will be seen that in these selections the function of the registers is to connect the proper number of counting relays into the circuit.

Mention has been made above of the "A" and "B" bars of the commutator. Figure Number 37 will make clear the arrangements of the various bars of the commutators and the functions which they perform. It will be seen that the commutators are different for different types of selectors but certain features are common to all types. The white parts represent metal and the black portion insulation. Each metal bar is designated by a letter opposite its terminal with the exception of the bars marked "A" which are in one piece with the "Z" bars. Each of the long bars on the "feeder" side is continuous but only the portions shown in white appear on the face of the commutator; where interrupted by black, the bar is bent below the surface of the insulation in which it is embedded. In the diagrams below the commutators, the short vertical lines represent spring contacts of the commutator brush which slide up and

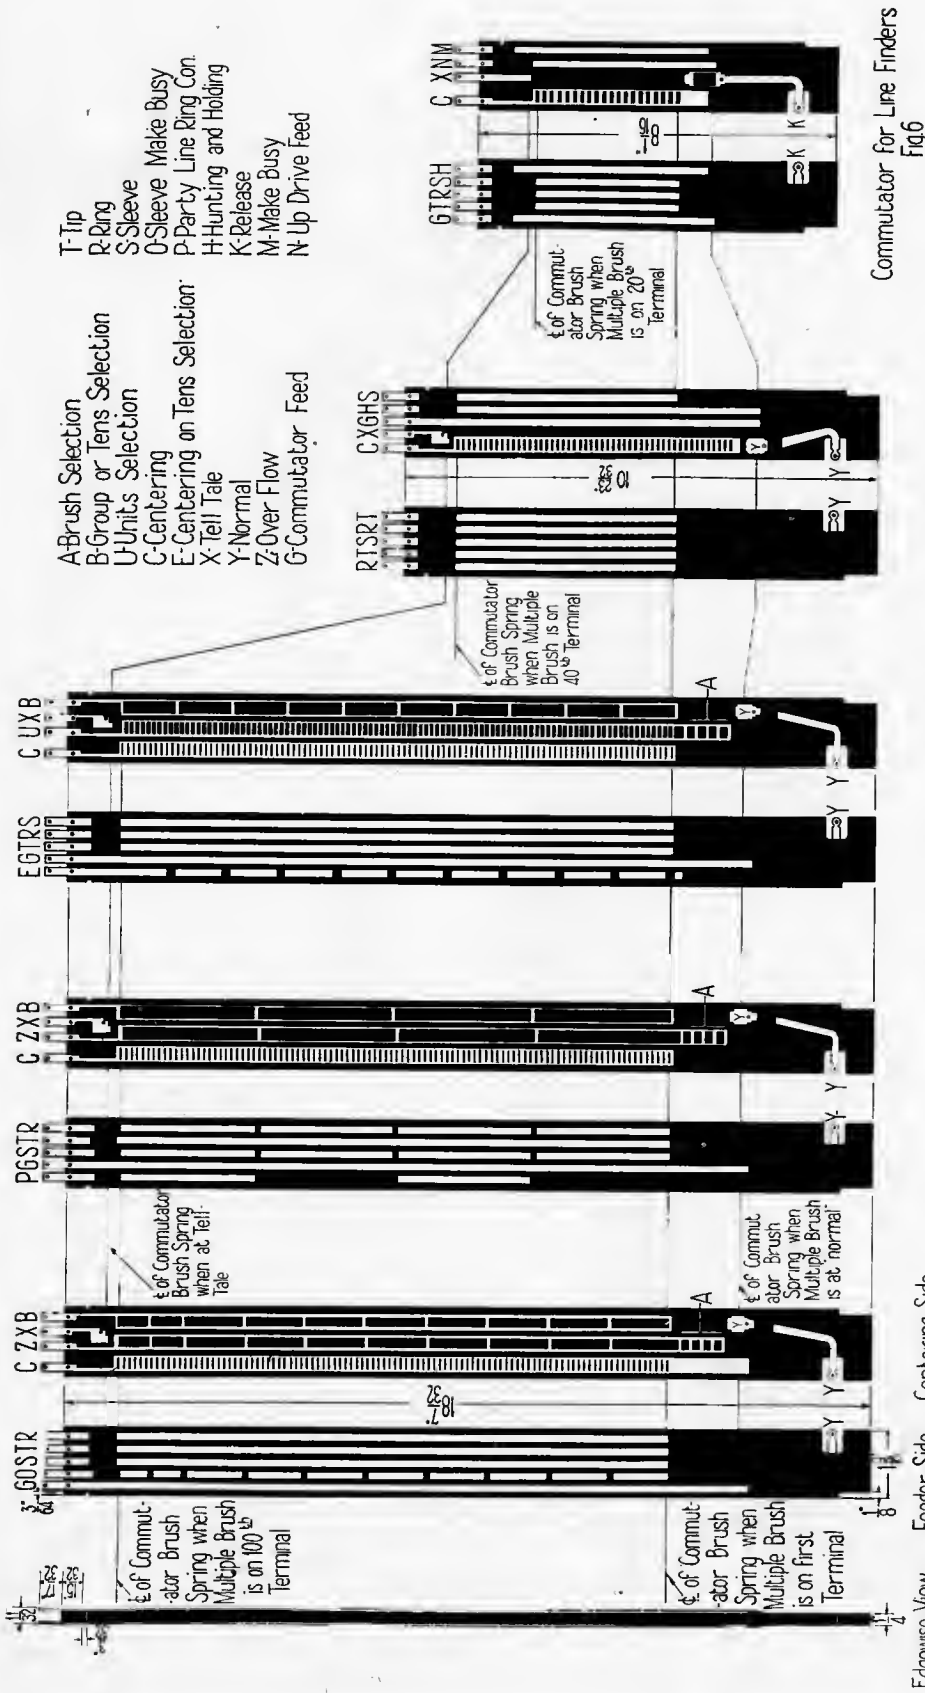

Edge-wise View
of Typical
Commutator
Fig. 1






Feeder Side
Centering Side
Commutator for District
and Office Selectors
Fig. 2

Commutator for Incoming
Selectors
Fig. 3

Commutator for Final
Selectors
Fig. 4

Commutator for Translators
Fig. 5


Commutator for Line Finders
Fig. 6



COMMUTATOR BRUSH CONNECTIONS

Figure 37.
Commutators

The selector now being at the beginning of a group of trunks it automatically hunts through that group, and through the succeeding groups, if the intermediate overflow terminals are made busy, for an idle trunk. The connections for this performance are arranged as shown in Figure Number 38. The "L" relay is operated and the up-drive clutch is receiving current through the contact of the "L" relay so that the selector is going up. The sleeve terminals of busy trunks will have ground on them. So long, then, as the sleeve contact of the selector brush is touching the sleeve terminal of a busy trunk, the "L" relay will be held operated by the ground on the sleeve terminal. As

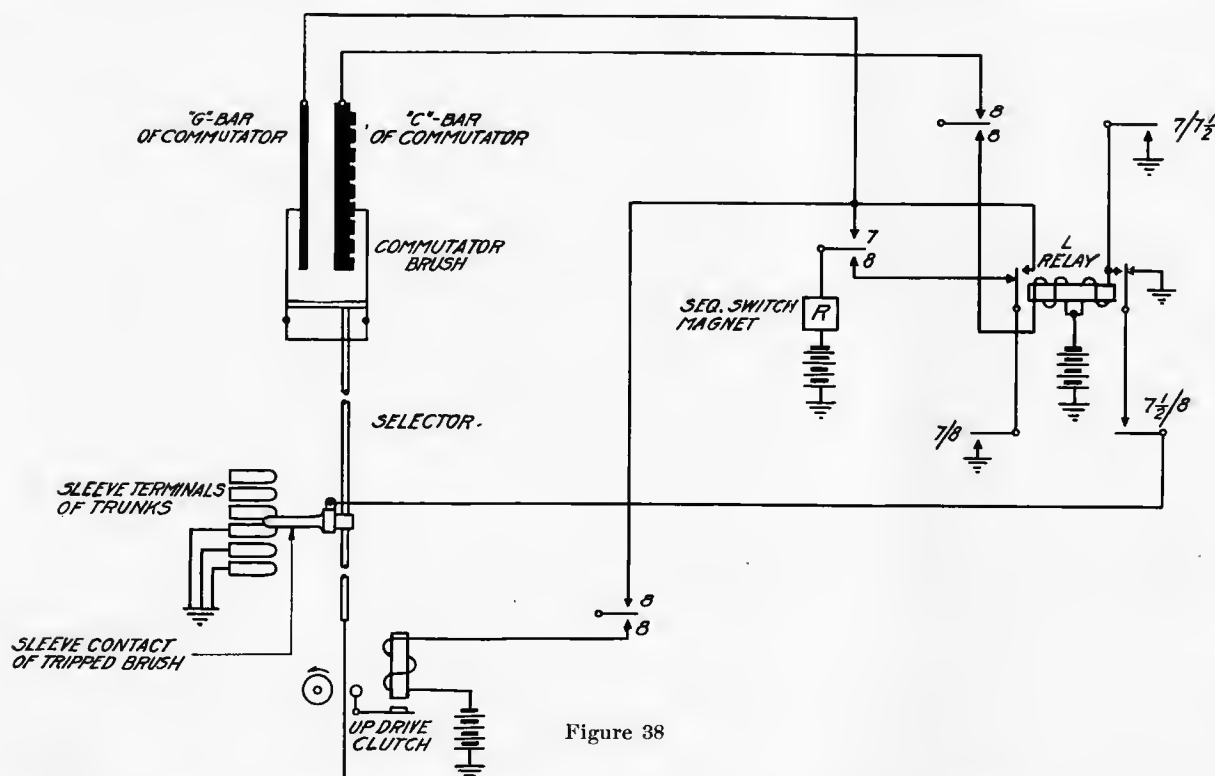

soon, however, as the selector brush passes off the terminals of the last busy trunk there will be no ground there to hold operated the "L" relay. But should the "L" relay release at this moment the current would be cut off from the clutch and the selector would drop back onto the terminals of the last busy trunk. This is prevented by the fact that the "L" relay is obtaining ground through the commutator brush which is touching one of the metal segments of the "C" commutator bar. Not until the commutator brushes pass off the metal segment does the "L" relay release, cutting off the clutch and stopping the selector. By this time, however, the selector is opposite the terminal of the idle trunk and the pawl in

the clutch has fallen into a notch in the rack so that the selector is prevented from dropping down. Thus it will be seen that in trunk hunting the condition of the sleeve terminal of the trunk determines whether or not the selector will stop on that trunk and the metal segments of the commutator merely serve to assure that the selector will be raised high enough so that the pawl

in the clutch will surely fall into the notch in the rack and the selector be held on the idle trunk and not be allowed to slip back onto the trunk below. Should the selector find all the trunks in the group busy it will pass over them all and onto the overflow terminals and the "Z" segment of the commutator. This will give a busy signal to the calling subscriber.

The Office Code

Let us now consider the office code. The subscriber is instructed to dial the first three letters of the name of the office. It will be seen that dialing three letters is the same as dialing three figures, for the letters appear in the same holes as the figures, and, of course, the dial cannot transmit a letter but merely makes and breaks the circuit a certain number of times. Thus, dialing "PEN" for Pennsylvania Central Office is the same thing as dialing 736 (see Figure Number 39). The first three letters of the name are used, since it is easier to remember the name and four figures than to keep in mind the seven figures that otherwise would be required. With this arrangement we cannot have two offices in the same area whose names begin with the same three letters in the same order, nor can we have two offices whose names begin, not even with the same three letters, but with three letters which correspond to the same three numbers in the same order. Thus if we have an office named Canal, the number code for that office is 226, and we cannot have offices named Cambridge, Bampton, Banks, Abner, Aborn, Acme, or Acorn, for all these would have the same number code and would be the same thing when dialed.

It will be observed that no letters appear in

the hole with the figure 1, so that the digit 1 never forms a part of the office code. There are two reasons for this. This figure is used for the second and third digits of certain official codes, such as codes for Long Distance, Repair Clerk and Commercial Office. Furthermore, if 1 formed the first digit of some office codes an accidental jog of the switchhook before the subscriber starts to dial would have the same effect as dialing this digit. In any code, the first digit dialed is never a 1 and the sender is so arranged that the dialing of 1, or, what amounts to the same thing, jogging the switchhook before beginning to dial, does not interfere with the operation of the apparatus. It is hardly possible that the subscriber could, by jogging the switchhook, dial any other number, since he could not imitate in that way the rapid and uniform pulses of the dial. Jogging the switchhook three times would therefore be received by the sender as a series of three 1's rather than as a 3 and would not affect the subsequent dialing.

The digit 0 is reserved for dialing the operator so that 8 holes are left into which to put letters. This makes it necessary to eliminate two letters from the alphabet and "Q" and "Z" have been omitted. Since all of the three letters in the same hole will be the same digit, the number of different combinations available is 512 where three letters are used for the office code. Not all of these combinations are actually available, however, where the offices are given names, since for some of the combinations such as WWW, WWX, WWY, WXW, WXX, WXY, WYW, WYX, WYY, XWW, XWX, XWY, XXW, XXX, XXY, XYW, XYX, XYY, YWW, YWX, YWY, YXW, YXX, YXY, YYW, YYX, and YYY which represent all the possible arrangements of the code 999, it is hard to find a suitable name, in the English language at least. Only in very large cities is the number of offices to be dialed by the subscribers so great as to require the use of 3 digit codes. By dialing the first two letters of the office names 64 codes may be obtained.

The subscriber then dials the first three letters of the name of the office which he desires and these set three register switches known as "A,"



Figure 39

"B," and "C" registers to positions corresponding to the number of pulses produced by the dial for each letter. The combination of these positions must determine a number of questions in regard to the call which the subscriber is making. These are as follows:

1. The class of the call; whether it is to reach a mechanical line, a line in a manual office, or an operator.
2. Whether the call is covered by the regular telephone charges or should be sent to an operator in order that a toll charge may be made.
3. What district brush should be tripped.
4. What group of trunks on the district frame is to be selected.
5. Whether or not an office selector is required in order to reach the proper trunk.
6. What office brush is to be tripped (if an office selection is to be made).
7. What group of trunks on the office frame is to be selected (if an office selection is to be made).
8. What compensating resistance should be introduced into the circuit during the control of the selectors to compensate for the resistance of the circuit over which the selection is to be made.
9. Whether the call should be routed to a special operator such as long distance or toll.
10. Whether a delay should be introduced for the recording of a number above 9999 or for a party letter of a manual party line.
11. What type of connection is necessary during talking.

The Translator

It is the function of the translator to settle these questions. Each sender is connected permanently to its own translator selectors. The translator for 3 digit codes which is shown in Figure Number 40 consists of a panel type selecting mechanism having 10 banks of 40 terminals each and a hunting bank of 57 terminals. In the hunting bank the terminals are in a single vertical row before each selector instead of in three rows as in the other banks. Furthermore, each vertical row in the hunting bank is wired separately and not connected to the adjacent row. The alternate brushes of the translator are connected together and they trip in pairs so that there are six leads connected by the brushes, whenever the translator selector rests upon a set of terminals. The hunting bank serves to locate the translator selector upon the proper set of terminals and its terminals are connected to the registers of the sender. As will be seen from Figure Number 41, the set of terminals on which the translator will stop is determined by the combination of the setting of the registers which record the letters which the subscriber dials. The first two letters determine the translator brushes which will be tripped and the group of eight sets of translator terminals which will be selected. As soon as the third letter has been dialed by the subscriber the translator selector moves up to the determined set of terminals. Each working office code has its own particular set of terminals. When the translator selector brushes rest on any set of six terminals in the translator banks there are six leads connected through the translator selector brushes to six sets of translator register relays in the sender, each set consisting of six or less relays.

These relays by the fact of their being operated or not operated in various combinations determine the number of counting relays that will be introduced into each selection performed by the district and office selectors on this call and also set to certain positions sequence switches which make the proper circuit connections for the different classes of calls, insert the proper compensating



Figure 40

resistances, etc. Each terminal in the translator banks is constantly fed with a series of pulses from the pulse machine and no two sets of six

terminals in the translator have the same combination of pulses. Thus each working office code is represented by six terminals in the translator with its own peculiar combination of pulses. A translator frame will care for 200 office codes. In each office two sets of translator frames are provided and each sender is connected to two translator selectors, each caring for a different 200 codes. Which of these two translators the sender

uses is determined by the first letter of the office code which the subscriber dials. Since there are 512 possible codes and translators are provided for only 400, there are a number sets of terminals in the translator frames which are assigned to two or more codes each, only one of the codes in each case being used by the subscriber. Figure Number 42 shows the arrangement of the codes on the translator terminals.

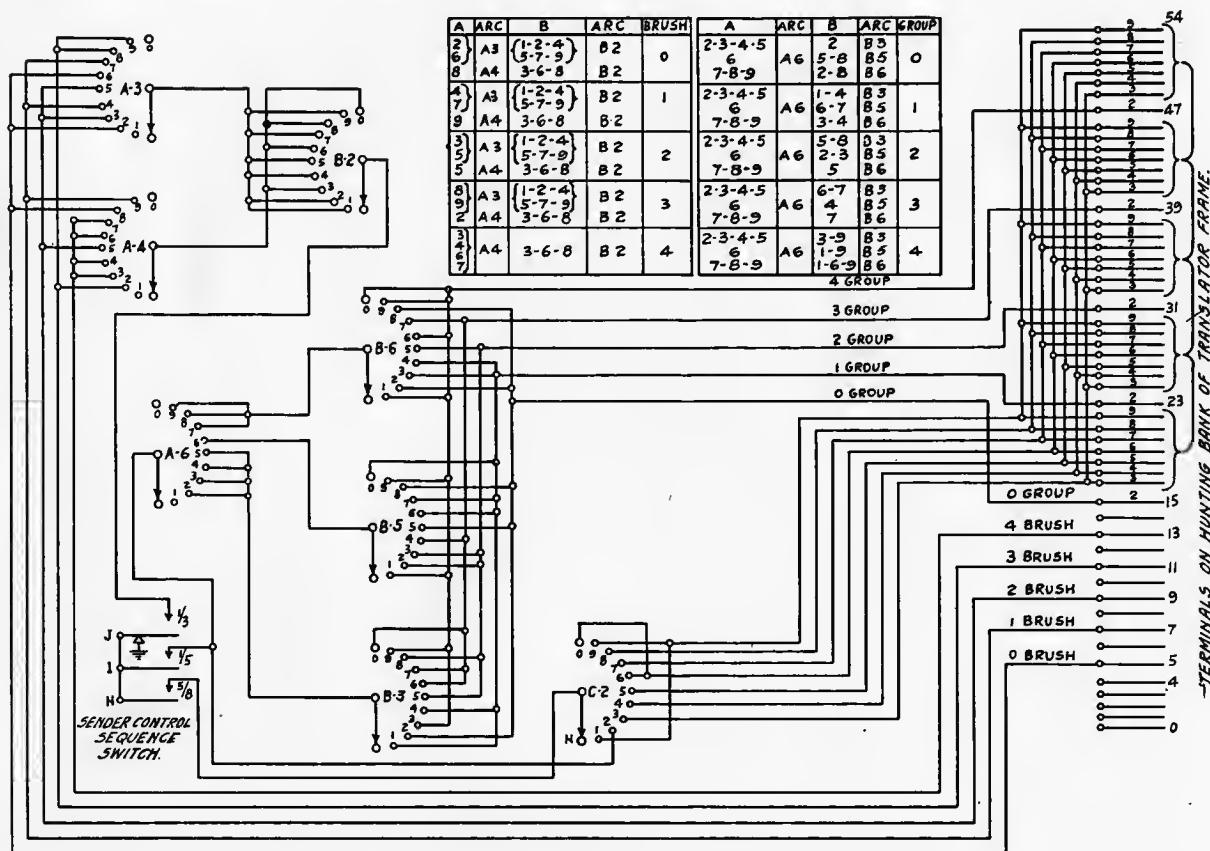


Figure 41

The Pulse Machine

The pulses are furnished by the pulse machine shown in Figure Number 43. It consists of a series of drums which are constantly revolved by a motor. Each of these drums is divided into six segments which may be connected either to battery or to ground. A complete set consists of 40 "sending" drums, each of which has a different arrangement of battery and ground on its segments as shown in Figure Number 44; six "receiving" drums, each of which has battery on only one segment; and one "timing" drum which has battery on all segments. From the 40 sending drums are chosen six which are connected to the six terminals in the translator

frame which represent an office code. The same sending drum will be connected to many terminals in the translator, but no set of six terminals representing an office code will be connected to the same drums as another set representing another office code unless all the conditions of a call made with the former code are the same as those for the latter code. The six receiving drums are connected directly to the senders and are used for all office codes. The timing drum is connected to counting relay Number 6 in each sender and when in use operates a pair of counting relays at each contact. When it has made seven contacts the

RACHUNGAN REKENAN INSTRUMEN	O BRUSH				1 BRUSH				2 BRUSH				3 BRUSH				4 BRUSH			
	TRANS. GR. NO.1	TRANS. GR. NO.2	TRANS. GR. NO.1	TRANS. GR. NO.2	TRANS. GR. NO.1	TRANS. GR. NO.2	TRANS. GR. NO.1	TRANS. GR. NO.2	TRANS. GR. NO.1	TRANS. GR. NO.2	TRANS. GR. NO.1	TRANS. GR. NO.2	TRANS. GR. NO.1	TRANS. GR. NO.2	TRANS. GR. NO.1	TRANS. GR. NO.2				
4 GROUP	0**	610	650	860	710	790	960	490	390	500	500	230	910	930	810	890	330	760	430	
	35 54 9*	619	659	859	719	799	959	499	399	509	509	239	919	939	819	899	339	769	439	
	38 53 8	618	658	858	718	798	958	498	398	508	508	238	918	938	818	898	338	768	438	
	37 52 7	617	657	857	717	797	957	497	397	507	507	237	917	937	817	897	337	767	437	
	36 51 6	616	656	856	716	796	956	496	396	506	506	236	916	936	816	896	336	766	436	
	35 50 5	615	655	855	715	795	955	495	395	505	505	235	915	935	815	895	335	765	435	
	34 49 4	614	654	854	714	794	954	494	394	504	504	234	914	934	814	894	334	764	434	
	33 48 3	613	653	853	713	793	953	493	393	503	503	233	913	933	813	893	333	763	433	
	32 47 2	612	652	852	712	792	952	492	392	502	502	232	912	932	812	892	332	762	432	
	31 46 1	611	651	851	711	791	951	491	391	501	501	231	911	931	811	891	331	761	431	
3 GROUP	0**	640	670	770	770	770	770	470	370	560	560	260	970	970	870	870	360	750	460	
	31 46 9*	649	679	779	779	779	779	479	379	569	569	269	979	979	879	879	369	759	469	
	30 45 8	648	678	778	778	778	778	478	378	568	568	268	978	978	878	878	368	758	468	
	29 44 7	647	677	777	777	777	777	477	377	567	567	267	977	977	877	877	367	757	467	
	28 43 6**	646	676	776	776	776	776	476	376	566	566	266	976	976	876	876	366	756	466	
	27 42 5	645	675	775	775	775	775	475	375	565	565	265	975	975	875	875	365	755	465	
	26 41 4	644	674	774	774	774	774	474	374	564	564	264	974	974	874	874	364	754	464	
	25 40 3	643	673	773	773	773	773	473	373	563	563	263	973	973	873	873	363	753	463	
	24 39 2	642	672	772	772	772	772	472	372	562	562	262	972	972	872	872	362	752	462	
	23 38 1*	641	671	771	771	771	771	471	371	561	561	261	971	971	871	871	361	751	461	
2 GROUP	0**	650	680	780	780	780	780	480	380	570	570	270	980	980	880	880	370	760	470	
	25 39 9*	659	689	789	789	789	789	489	389	579	579	279	989	989	889	889	379	769	479	
	22 37 8	658	688	788	788	788	788	488	388	578	578	278	988	988	888	888	378	768	478	
	21 36 7	657	687	787	787	787	787	487	387	577	577	277	987	987	887	887	377	767	477	
	20 35 6**	656	686	786	786	786	786	486	386	576	576	276	986	986	886	886	376	766	476	
	19 34 5	655	685	785	785	785	785	485	385	575	575	275	985	985	885	885	375	765	475	
	18 33 4	654	684	784	784	784	784	484	384	574	574	274	984	984	884	884	374	764	474	
	17 32 3	653	683	783	783	783	783	483	383	573	573	273	983	983	883	883	373	763	473	
	16 31 2	652	682	782	782	782	782	482	382	572	572	272	982	982	882	882	372	762	472	
	15 30 1*	651	681	781	781	781	781	481	381	571	571	271	981	981	881	881	371	761	471	
1 GROUP	0**	660	690	790	790	790	790	490	390	580	580	280	990	990	890	890	380	770	480	
	15 30 9*	679	699	799	799	799	799	499	399	579	579	279	989	989	889	889	379	769	479	
	14 29 8	678	698	798	798	798	798	498	398	578	578	278	988	988	888	888	378	768	478	
	13 28 7	677	697	797	797	797	797	497	397	577	577	277	987	987	887	887	377	767	477	
	12 27 6**	676	696	796	796	796	796	496	396	576	576	276	986	986	886	886	376	766	476	
	11 26 5	675	695	795	795	795	795	495	395	575	575	275	985	985	885	885	375	765	475	
	10 25 4	674	694	794	794	794	794	494	394	574	574	274	984	984	884	884	374	764	474	
	9 24 3	673	693	793	793	793	793	493	393	573	573	273	983	983	883	883	373	763	473	
	8 23 2	672	692	792	792	792	792	492	392	572	572	272	982	982	882	882	372	762	472	
	7 22 1*	671	691	791	791	791	791	491	391	571	571	271	981	981	881	881	371	761	471	
0 GROUP	0**	680	690	790	790	790	790	490	390	580	580	280	990	990	890	890	380	770	480	
	7 22 9*	699	699	799	799	799	799	499	399	579	579	279	989	989	889	889	379	769	479	
	6 21 8	698	698	798	798	798	798	498	398	578	578	278	988	988	888	888	378	768	478	
	5 20 7	697	697	797	797	797	797	497	397	577	577	277	987	987	887	887	377	767	477	
	4 19 6**	696	696	796	796	796	796	496	396	576	576	276	986	986	886	886	376	766	476	
	3 18 5	695	695	795	795	795	795	495	395	575	575	275	985	985	885	885	375	765	475	
	2 17 4	694	694	794	794	794	794	494	394	574	574	274	984	984	884	884	374	764	474	
	1 16 3	693	693	793	793	793	793	493	393	573	573	273	983	983	883	883	373	763	473	
	0 15 2	692	692	792	792	792	792	492	392	572	572	272	982	982	882	882	372	762	472	
	0 14 1*	691	691	791	791	791	791	491	391	571	571	271	981	981	881	881	371	761	471	



NEW YORK CITY AREA 3-DIGIT TRANSLATOR -- CHART

- NOTES:-

1. - EXAMPLE ON USE OF CHART. TO FIND THE BRUSH, GROUP AND TERMINAL, PIPER #11 SHOULD BE DELETED, 7 ON THE CHART, THE REGISTER SHOULD BE FOLLOWED TO 38, 1 ON THE CHART, THE BRUSH WILL BE FOUND TO BE 4 AND THE GROUP 1, THE TERMINAL BEING TWO LESS THAN THE THIRD DIGIT ADDED.
2. - TRANSLATOR GROUP #11 INCLUDES ALL OFFICE CODES THE FIRST DIGIT OF WHICH IS 2, 3, 7 OR 9.
3. - TRANSLATOR GROUP #2 INCLUDES ALL OFFICE CODES THE FIRST DIGIT OF WHICH IS 4, 5, 6 OR 8.
4. - OFFICIAL CODES FOR INFORMATION, ETC., WILL REQUIRE THAT #11 BE DIALLERD ON THE 15th REGISTER, - EXAMPLE - INFORMATION WILL BE 411.
5. - * 1 AND 2 IN THE THIRD DIGIT OR "C" REGISTER ARE BRIDGED SO THAT 9 TERMINAL IS SELECTED.
6. - ** 0 AND 6 IN THE THIRD DIGIT OR "C" REGISTER ARE BRIDGED SO THAT 0 TERMINAL IS SELECTED.
7. - 0 AND 6 ARE BRIDGED IN THE SECOND DIGIT OR "B" REGISTER SO THAT 6 IS SELECTED.

TOTAL		1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75		76		77		78		79		80		81		82		83		84		85		86		87		88		89		90		91		92		93		94		95		96		97		98		99		100	
TOTAL		1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75		76		77		78		79		80		81		82		83		84		85		86		87		88		89		90		91		92		93		94		95		96		97		98		99		100	
TOTAL		1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75		76		77		78		79		80		81		82		83		84		85		86		87		88		89		90		91		92		93		94		95		96		97		98		99		100	
TOTAL		1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75		76		77		78		79		80		81		82		83		84		85		86		87		88		89		90		91		92		93		94		95		96		97		98		99		100	
TOTAL		1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75		76		77		78		79		80		81		82		83		84		85		86		87		88		89		90		91		92		93		94		95		96		97		98		99		100	
TOTAL		1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75		76		77		78		79		80		81		82		83		84		85		86		87		88		89		90		91		92		93		94		95		96		97		98		99		100	
TOTAL		1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75		76		77		78		79		80		81		82		83		84		85		86		87		88		89		90		91		92		93		94		95		96		97		98		99		100	
TOTAL		1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75		76		77		78		79		80		81		82		83		84		85		86		87		88		89		90		91		92		93		94		95		96		97		98		99		100	
TOTAL		1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75		76		77		78		79		80		81		82		83		84		85		86		87		88		89		90		91		92		93		94		95		96		97		98		99		100	
TOTAL		1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75		76		77		78		79		80		81		82		83		84		85		86		87		88		89		90		91		92		93		94		95		96		97		98		99		100	
TOTAL		1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75		76		77		78		79		80		81		82		83		84		85		86		87		88		89		90		91		92		93		94		95		96		97		98		99		100	
TOTAL		1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75		76		77		78		79		80		81		82		83		84		85		86		87		88		89		90		91		92		93		94		95		96		97		98		99		100	
TOTAL		1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32																																																																																																																																									

[illegible]

connections of the pulse machine drums through the translator to the register relays of the sender will be broken. Thus during one revolution of the pulse machine drums certain of them will be connected to the register relays of the sender. Seven contacts of the timing drum are required to insure a complete revolution.

During this one revolution each of the six sending drums which are connected through the translator brushes closes the leads to its associated register relays as many times as it has live segments. During the same time each of the six receiving drums makes contact once, since they each have only one live segment. If the live segments of a receiving drum and those of a sending drum make contact at the same moment, the particular register relay which is connected to the receiving drum, in the particular set which is connected to the sending drum, will be operated and locked. (The locking circuits are not shown in Figure Number 45.) Thus certain register relays will be locked up in a combination peculiar to the office code dialed. The object of this scheme is merely to make it possible to produce easily a large number of combinations and to change them with facility. The connections between the translator terminals and the drums of the pulse machine are made on a cross connection frame so as to be readily changed. The arrangement of the trans-



Figure 43

SENDING DRUMS						
DRUMS	SEGMENTS					
	1	2	3	4	5	6
0						
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						
21						
22						
23						
24						
25						
26						
27						
28						
29						
30						
31						
32						
33						
34						
35						
36						
37						
38						
39						

RECEIVING DRUMS						
DRUMS	SEGMENTS					
	1	2	3	4	5	6
1						
2						
3						
4						
5						
6						

48V. BATTERY
 10th GROUND

Figure 44

lator, pulse machine, and register relays is shown diagrammatically in Figure Number 45.

Thus the dialing of the office code sets the office code registers; their setting directs the translator to the proper set of terminals; these terminals are so connected to the pulse machine drums that a certain combination of register relays will be operated, and it is that combination which determines the course the call will take.

Where 2 digit codes are used, rotary switches are provided in each sender which act as translators and will care for 44 codes. With this simpler form of translator, no pulse machine is required.

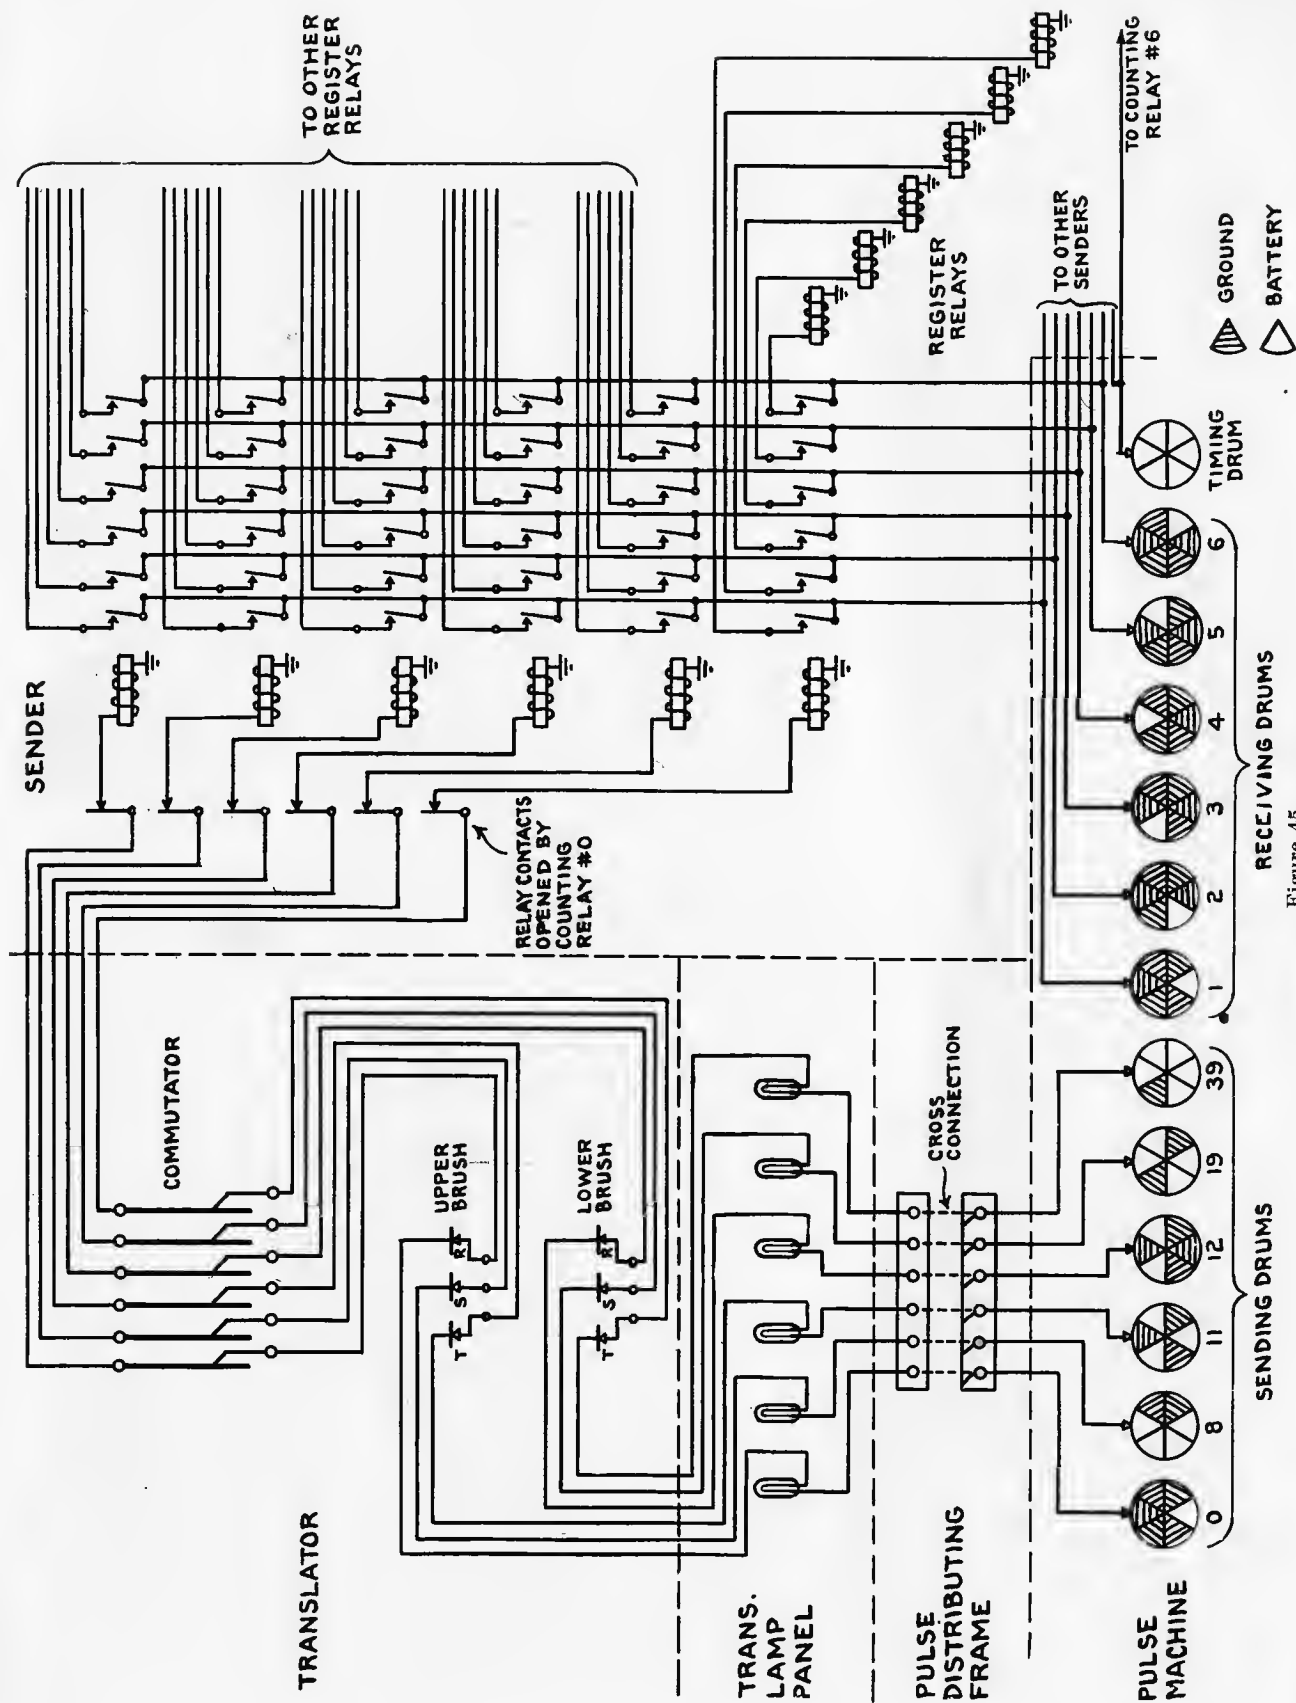


Figure 45
Diagram of Pulsing Scheme

Newark Sunday Call 0 E 41... *MUR j11B-2174	Newark Moses r 50 E 52... *PLA 24-1664	Newcom Isidor mortgages	Newhouse Gilbert M r 203 W 98. RIV side-0845
Newark Terminal & Transportation Co	Newark Sidney Iwry 25 Broad... *HAN over-9107	503-5th av. *VAN drblt-3567	Newhouse J Iwry 1650 Bway... *CIR cle-9499
438 Gwich. WAL ker-5063	Newark Sidney r 175 W 72... *END icott-1684	Newcom Sylvia Miss r 423 F 140. MGT ltrav-5479	Newhouse J M Iwry 214 W 29... *PEN slvnia-4898
Newark Terminal & Transp Co	Newark & Co brokers 60 Bway *HAN over-4350	Newcom A plasterers sup 515W42. CHI chng-3223	Newhouse J M r 1712 Townsend av. DAV enport-1521
65 Hudson. WHI tell-8330	Bond dept 60 Bway... *HAN over-4370	Newcom A Waring 329 E 29... *LEX innt-5588	Newhouse Leo & Co chng 763Bway. 570 ysent-3151
Newark Tortoise Shell Nov Co	Newborn Jacob dairy 434 Bway. WAD swth-9908	Residence 43 W 52... *CIR cle-4673	Newhouse S r 121 W Knushie rd. KIN gage-4097
1 W 37. *WIS consin-8464	Newborn Wm r 550 W 171... *WAS inlfigs-2469	Newell Ada A r Hotel San Remo. TRA falgar-5800	Newhouse S H Sherman Bq Hotel. END icott-8400
Newark Transformer Co 30 Chrch *COR lland-7637	Newbould A C Mrs r	Newell Alex r 596 Tinton av... *LUO low-0764	Newhouse S N Mrs r 4 W 93... *RIV side-9560
Newark Vegetable Oil Co 33 S Wm. WHI tell-7995	180 Riverside dr. SCH upler-7881	Newell Carroll O 215-4th av... *STU yunt-1370	Newhouse Sophie Mrs r 780 W B at. MUR rside-1222
Newark & N Y Express 51 Harrison. WAL ker-6414	Newbrook Co ltr gds 100 W 32 *PEN slvnia-1217	Newell Clarence D adv 120 W 32 *PEN slvnia-6480	Newhouse Walter S Junior 82 Wm. JOH n-5413
Newark & N Y Express 230 Pearl... *JOL n-2994	Newbrook Co ltr gds 173-5th av... *ASH land-7365	Newell Claude r 311 W 44... *LOW gacre-2405	Newhouse & Herr Iwry 1650 Bway. *CIR cle-9499
Newark & N Y Parcel Delivery Co	Newbrook Flocks Inc The 592E183. FOR dhm-4940	Newell Emmerson R pat Iwry	Newill Maria Mrs r
610 W 37. WIS consin-4443	Newbrook Mfg Co ladies neckwr	217 Park av *ASH land-8575	255 Underhill av. WES lchstr-3055
Newark & N Y Tow Boat Co	170-5th av. *CRA mnyr-0158	Newell Emmett Co adv 120 W 32 *PEN slvnia-6480	Newing & Wilcox theatrical
15 Moore. BOW ltrm-3648	Newbury Harry 68 Nassau... *JOH n-2043	Newell F B Co chrt makers	-118 W 39. *WIS consin-3612
Neway Edw r 101 Sterling av... *FAI rhnk-1423	Newbury Harry r 1355 Morris av. *BIN ghnm-2939	373-5th av. CAL edonia-9328	Newington Atts 330 W 95... *RIV rside-4174
Newbauer Ben B r 911 Walton av. JER one-5692	Newbury Jos r 21 E 119... *HAR lem-8839	Newell Frank B 373-5th av... *CAL edonia-9328	Newington Harry M 250 Park av. MUR yllit-7424
Newbauer Emil permyr 2328Amet av. BIL lings-1365	Newbury Julia C r 519-3d av... *LEX innt-7224	Newell Fredk B Rev 150-5th av. *WAT kins-1251	Newington John C 280 Park av... *MUR yllit-7424
Newbauer Julius r 510 W 190... *BIL lings-5048	Newbury S restrot 288 Bway... *WOR th-6923	Newell G Clifford r 540 W 123. *MON ument-2848	Newins Delia Mrs r 21 W 131... *HAR lem-7447
Newbauer Minnie Mrs r	Newbury Simon r 38 Marcy pl... *BIN ghnm-9994	Newell G Glenn artist Carnegie Hall. CJR cle-1350	Newins Harvey B real estate
010 W 171. WAS inlfigs-6669	Newburger Alfred H bankr 100 Bway. REC tot-7060	Newell Geo McCowan r 248 E 61... *REG ent-4472	522-5th av. *VAN drblt-2962
Newbegin Robert C cl est	Newburger Alfred H r 283Cent PWSCH upler-2423	Newell Geo McCowan r 248 E 61... *REG ent-4472	33 E 18 STU yunt-2662
330-5th av. *PEN slvnia-3700	Newburger Anna. 103 S So blnd. RAY mnd-5592	Newell Gertrude Miss r 150 E 54... *PLA 24-3591	Newitt Milton furn 137 W 52... *CIR cle-10351
Newberg A r 2835 Bndrose av... *RAY mnd-5288	Newburger B r 148 W 180... *RAY mnd-2729	Newell Grace A studio Carnegie Hall. CIR cle-1350	Newitt Milton r 130 E 94. *ATW ater-5786
Newberg A A acctnt 303-5th av. *ASH lnd-9187	Newburger Bertha Mrs r 105W73. SUS oheana-5312	Newell Cwondolen E Mrs r	Newitz & Breit furn 220 W 59. PEN slvnia-5833
Newberg A A r 731 Creston Pl. W. TRE mnd-0782	Newburger Eli S r 16 E 98... *ATW ater-4060	Newell James asdwrt 504 W 53. COL mus-6311	Newkirk Evelyn S r 2327Adwrs av. SEO gwick-8053
Newberg Albert r 143 W 132... *MUR rside-8932	Newburger Henderson & Loeb	Newell John r 4529 Wilder av... *FAI rhnk-3499	Newkirk Florence Mrs IN
Newberg Benson B r	Bankers & brokers 100 Bway. REC tot-7060	Newell Little B Mrs r 448 W 153. BRA dhst-5609	678 St. 44. MUR rside-4752
1530 Plimpton or. OAV enport-3997	Branch 202-5th av. *ASH lnd-8850	Newell M Moyca Miss r 375 Park av. PLA 24-9066	Newkirk J C Mme r 28 W 135... *HAR lem-4985
Newberg Chas r 61 W 174... *BIN ghnm-6138	Branch 511-5th av. *VAN drblt-4560	Newell Mfg Co curtain	Newkirk Lella A Mrs furn rms
Newberg Chas r 284 Rivington. ORC har-0482	Branch 517-7th av... *LAW gacre-5252	154 Nassau. BEE kman-6013	307 W 78. SUS gchra-4205
Newberg Lillian dres 260 Livingston. DRY Dock-9183	Newburger Isidore 215-4th av... *STU yunt-9100	Newell Mfg Co curtain rods	Newkirk Louis H Iwry 192 Liberty. REC tot-8420
Newberg Rosa ltr dectr	Newburger Isidore r 315 W 98. *RIV rside-3037	154 Nassau. BEE kman-5358	Newkirk Louis J Mrs r 233W4. TRA falgar-4759
Newberg Rose Mrs r 1330 Clinton av. TRE mnd-1390	Newburger Jos E r 10 W 86... *SCN upler-5189	Newell Mfg Co sugar machinery	Newkirk Troy W r 678 StNich av. WES lchstr-9671
Newberg Sally r 3657 Bway... *BRA dhst-4613	Newburger L Mrs r 569 W 159. *WAS inlfigs-8569	149 Bway. HAN ora-8372	Newkirk W off. Grn Cent Term. VAN drblt-10147
Newberg Stanley S r 180Ctina av. TRE mnd-2128	Newburger Lester M bankr 100 Bway. REC tot-7060	Newell Margaret M Miss r	Newkirk Wm r 308 W 50... *COL mus-3352
Newberg & Leopold bdris 264Dlm. DRY Dock-6117	Residence 1 W 70... *END icott-4810	103 W 102. ACA demy-6337	Newland Africa Miss r 145 W 84. END icott-1683
Newberger A L r Hotel Gotham... *CIR cle-9064	Newburger Morton J bankr 100Bway. REC tot-7060	Newell Mary O'Connor r	Newland Barnett 375 West End av. END icott-1223
Newberger Abraham r Hotel Gotham. CIR cle-2200	Newburger Saml ctn 60 Beaver... *WNI lch-2640	1873 Cedar av. SEO gwick-7889	Newland Barnett factory 408 W Bway. GPR ing-2114
Newberger Abraham L 27 W 23. *CRA mnyr-1220	Newburger Saml M bankr 100 Bway. REC tot-7060	Newell Rose Mrs r 13 W 64... *TRA falgar-2308	Newland Headwear Co 31 W 4. SPR ing-3400
Newberger Ad dancing master	Residence 1 E 50... *PLA 24-0964	Newell Sibyl Gordon r 248 E 61... *REG ent-4472	Newland Isidor r 45 W 110... *MON ument-0608
210 W 80. END icott-5179	Newburger Saml & Co cotton	Newell Wm r 315 W 97... *RIV rside-4784	Newland M Mrs r 3089 Deatur av. OLI ntr-3556
Newberga Audit Co acctnts	60 Beaver. *WHI lch-2640	Newell Wm r 556 W 189... *WAS inlfigs-2798	Newland Paper Box Co 15 Crosby. CAN al-7738
38 Park row. COR lland-3787	Newburgh Morris r 1162 Shrdn av. TOP ping-6938	Newell Wm E r 568 E 106... *KIL patrik-2926	Newland Paper Box Co 15 Crosby. CAN al-7738
Newberger Audit Co acctnts	Newbury A J r 73 Manhattan av. *WES lch-1275	Newell Wm E r 610 W 186... *EDG eomb-3575	Newland Paper Box Co 15 Crosby. CAN al-7738
3204 Cambridge av. KIN gsbge-2170	Newbury Chas r 401 Logan. *WES lch-1275	Newell Wm P r 63 W 143... *EDG eomb-1462	Newland Paper Box Co 15 Crosby. CAN al-7738
Newberger David acct	Newbury Emily E Mrs r 2412-7th av. BRA dhst-1267	Newell & Spencer pat Iwry	Newland Rott B r 1763 Sidgwick ar. SED gwick-8289
3204 Cambridge av. KIN gsbge-2170	Newbury Park r 171 St Nich av. *MON ument-7553	247 Park av *ASH lnd-8575	Newland W C r 347-5th av. *ASH lnd-6319
Newberger David acct	Newbury & Evans Co planes 406W11. WAT lins-1049	Newelsohn M r 961 Fox... *INT rade-5497	Newland W C r 1160-5th av. *ATW ater-6198
Newberger Edwin Mrs r 135 CP&W. END icott-4020	Newbury Asps 601 W 162... *WAS inlfigs-2770	Newelsohn M r 961 Fox... *INT rade-5497	Newlander L Miss swedish employ
Newberger Ernest r 550 W 157. *WAD swth-7785	Newchwang Trading Co 159 W 25. WAT kins-3107	Newell M r 315 W 97... *RIV rside-4784	738 Lex av. REG ent-3490
Newberger E r 767 Tinton av... *DAY ton-3333	Newcity Walter tire tubes 151E41. ASN lnd-4891	Newell M r 315 W 97... *RIV rside-4784	Newlander L Miss swedish employ
Newberger Henry A r 2075 4th conc. RAY mnd-3353	Newcomb Alice 512-5th av... *MUR yllit-8848	Newell M r 315 W 97... *RIV rside-4784	Newland L C Miss 788 Lex av. *REG ent-3257
Newberger J ins Bible Hse... *STU yunt-4543	Newcomb Chas r 3702 Harper av. FAI rhnk-3395	Newell M r 315 W 97... *RIV rside-4784	Newlands John J r 148 W 64... *COL mus-2405
Newberger J r 219 E 196... *RAY mnd-5687	Newcomb Curtis r 590 E 166. *KIL patrik-1930	Newell M r 315 W 97... *RIV rside-4784	Newlin Edward M 675 W End av. RIV rside-2619
Newberger Jacob lins 133 Wm... *BEE kman-5675	Newcomb Endicott Co 123 W 31 *PEN slvnia-1810	Newell M r 315 W 97... *RIV rside-4784	Newlin Katherine P Mrs r
Newberger John r 1385Lingliff av. FOR dhm-0354	Newcomb Everitt W 114 Liberty. *REC tot-1398	Newell M r 315 W 97... *RIV rside-4784	58 Charles. WAT kins-9059
Newberger Max mail boys	Newcomb F J Mfg Co frames	Newell M r 315 W 97... *RIV rside-4784	Newlin Lillian Washburn Miss r
213 Monroe. DRY Dock-9867	49 W 13. *CNE lnes-4290	Newell M r 315 W 97... *RIV rside-4784	12 E 68. RIV rside-8384
Newberger Monroe r 253 W 90. *SCH upler-7973	Newcomb Frank H r 413 W 118. *CAT lnd-7649	Newell M r 315 W 97... *RIV rside-4784	Newman A bthr 2029 Jerome av. RAY mnd-0216
Newberger N ntr 514 Roger pl... *INT rade-5514	Newcomb N T Iwry 32 Nassau... *JOH n-4570	Newell M r 315 W 97... *RIV rside-4784	Newman A clothing mfr 37 E Bway. DRY Dock-8334
Newberger Italian L r 334 E 205. RLI ntr-1389	Newcomb Narry r 353 W 26... *LAC kwana-3263	Newell M r 315 W 97... *RIV rside-4784	Newman A laundry 63 E 183... *KEL log-4947
Newberger Rudolf restrnt 253W47. GNI chng-1766	Newcomb Henry R r 37 Rter dr. TRA falgar-6945	Newell M r 315 W 97... *RIV rside-4784	Newman A r 2023 Darlison av. RAY mnd-7562
Newberger S elec contr 409 E 14. LEX ingth-4149	Newcomb Jas F pres 330-7th av. PEN slvnia-7200	Newell M r 315 W 97... *RIV rside-4784	Newman A r 2023 Darlison av. RAY mnd-7562
Newberger S r 725 Seneca av. *INT rade-6229	Newcomb Jas F & Co Inc	Newell M r 315 W 97... *RIV rside-4784	Newman A r 1480 Hoe av. *INT rade-6583
Newberger Sam CPA	330-7th av. PEN slvnia-7200	Newell M r 315 W 97... *RIV rside-4784	Newman A r 2725 Morris av. *SED gwick-0204
3204 Cambridge av. KIN gsbge-2170	Newcomb Jas F & Co Inc	Newell M r 315 W 97... *RIV rside-4784	Newman A r 1406 Merriam av. DAV enport-2530
Newberger Saml CPA 38 Park row. COR lland-3787	Newcomb M B r 413 W 118. *CAT lnd-7649	Newell M r 315 W 97... *RIV rside-4784	Newman A r 1304 St Lawrence av. WES lchstr-2604
Newberger Saml CPA 38 Park row. COR lland-3787	Newcomb M B r 413 W 118. *CAT lnd-7649	Newell M r 315 W 97... *RIV rside-4784	Newman A r 1267 Sheridan av. *BIN ghnm-6174
Newberger Saml & Co pub acctnts	Newcomb M B r 413 W 118. *CAT lnd-7649	Newell M r 315 W 97... *RIV rside-4784	Newman A r 1715 Vyse av. *DAY ton-7314
38 Park row. COR lland-3787	Newcomb M B r 413 W 118. *CAT lnd-7649	Newell M r 315 W 97... *RIV rside-4784	Newman A r 268 W 113... *MON ument-9382
Newberger Sanford C & Co 31 E 27. MAD Sg-5639	Newcomb M B r 413 W 118. *CAT lnd-7649	Newell M r 315 W 97... *RIV rside-4784	Newman A r 967 Aldus. *DAY ton-9668
Newberger Sidney Iren ex brkr 27 Pine. JOH n-4376	Newcomb M B r 413 W 118. *CAT lnd-7649	Newell M r 315 W 97... *RIV rside-4784	Newman A B forgn exch 115 Bway. *REC tot-8154
Newberger Sidney M r 45 W 33. TRA falgar-1195	Newcomb M B r 413 W 118. *CAT lnd-7649	Newell M r 315 W 97... *RIV rside-4784	Newman A B r 251 E 18... *STU yunt-5793
Newbergt Sylvia E Miss r	Newcomb M B r 413 W 118. *CAT lnd-7649	Newell M r 315 W 97... *RIV rside-4784	Newman A B r 1987 Vyse av. *TRE mont-5857
1433 Mad av. ATW ater-3516	Newcomb M B r 413 W 118. *CAT lnd-7649	Newell M r 315 W 97... *RIV rside-4784	Newman A B Co imptr
Newbergh Chas A bldr	Newcomb M B r 413 W 118. *CAT lnd-7649	Newell M r 315 W 97... *RIV rside-4784	238 E Hstn. ORY Dock-8278
	Newcomb M B r 413 W 118. *CAT lnd-7649	Newell M r 315 W 97... *RIV rside-4784	Newman A C military supp
	Newcomb M B r 413 W 118. *CAT lnd-7649	Newell M r 315 W 97... *RIV rside-4784	1352 St Nich av. BIL lings-3251

Figure 46

The Call Indicator

Figure Number 46 is a portion of a New York City telephone directory. It will be seen that no distinction is made between lines in manual central offices and those in machine switching central offices, for at the time this directory was issued Academy was a machine switching central office and Vanderbilt a manual office. So far as the subscriber is concerned, there is no difference in the two types of call. If the office code which the sender will receive from the pulse machine, pulses which will cause it to select a trunk to that office in the usual manner but to function beyond that point in a different manner from its procedure in the case of calls to machine switching central offices.

The trunk to the manual central office terminates there at a position of the "B" board which is fitted with a device known as a "call indicator." A

"B" board with call indicators is shown in Figure Number 47 and a close view of a call indicator in Figure Number 48. It consists of a glass plate beneath which lamps and stencils are arranged so as to display a series of numbers when the lamps are lighted, different numbers being displayed by lighting the proper lamps. The plan of operation for the call indicator is shown in Figure Number 49. The trunks appear as single ended cords with lamps and keys as on a regular manual "B" board. When one of the trunks on a call indicator position has been selected by the mechanical apparatus in a machine switching central office it is indicated by the lighting of the assignment lamp associated with the trunk. The operator then presses the display key which serves to associate the call indicator with that trunk and to cause the sender in the machine switching central office to send out a series of pulses which lights certain lamps in

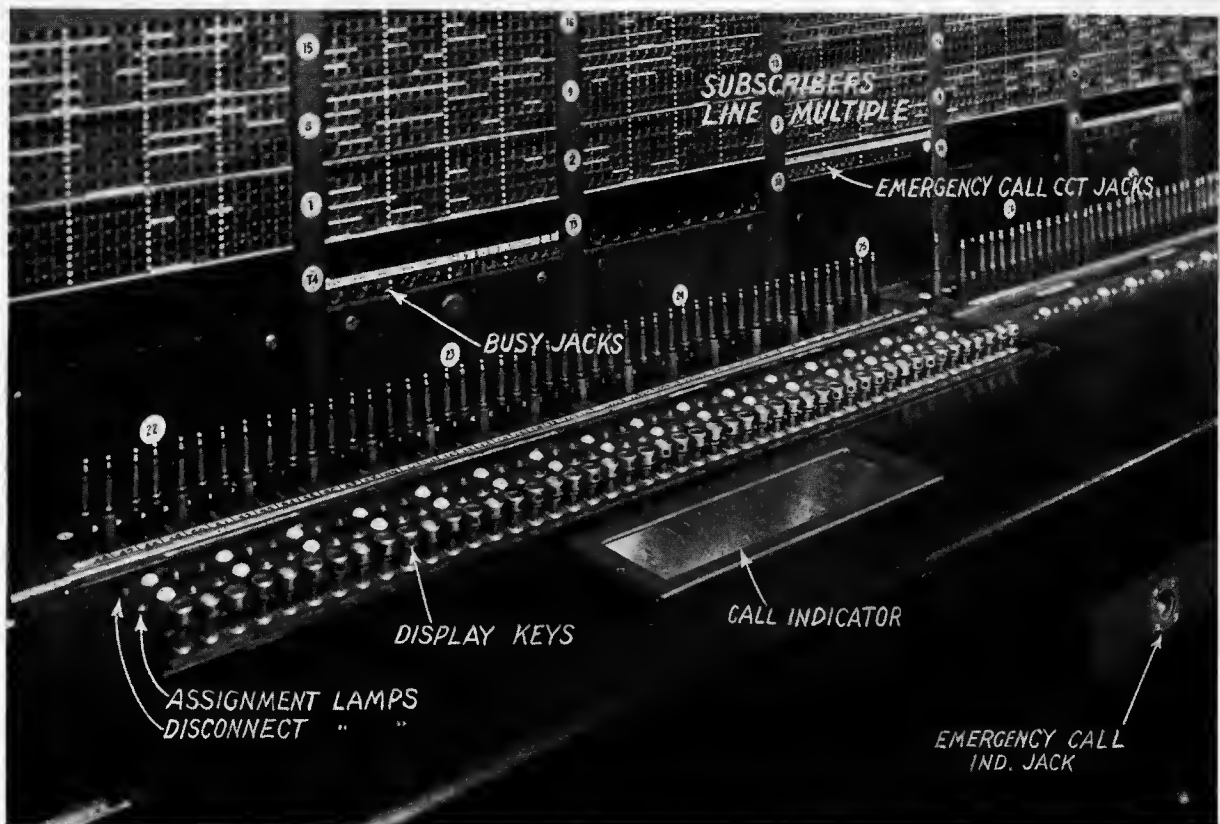


Figure 47



Figure 48
The Call Indicator

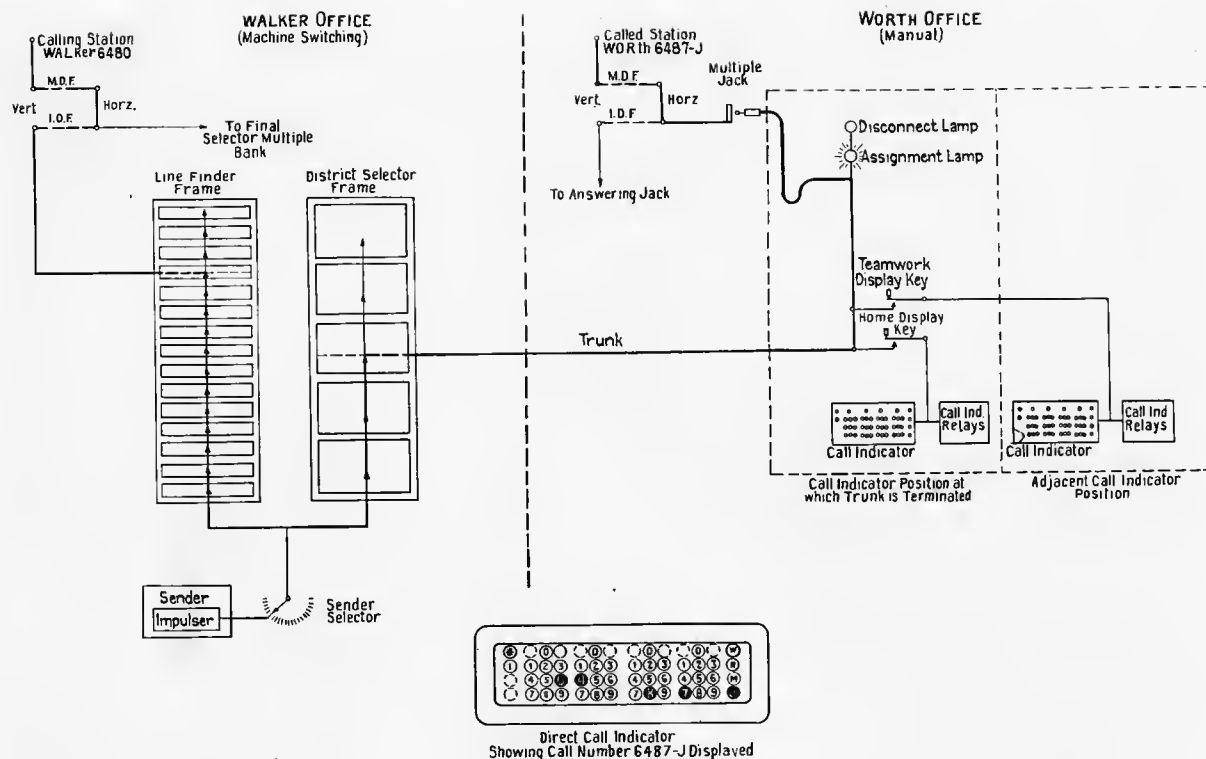


Figure 49

the call indicator and so display the number desired. The operator then makes connection to that line by inserting the plug of the cord into the jack of the line in the usual way. This causes the call indicator to be disconnected and the lamps extinguished ready for another call. The pressure of the "home" display key causes the number to be displayed on the call indicator of the position at which the trunk terminates. The trunks may also be provided with "teamwork" display keys which, when pressed, cause the number to appear on the call indicator of the adjacent position, enabling the operators to assist one another in the handling of the calls.

Manual central offices will accommodate 10,500 lines and four party stations in manual offices are designated by the letters "J," "M," "R," and "W." For certain stations, therefore, it is necessary to dial five digits or four digits and a party letter. An extra register is provided in the sender for this purpose and on calls to offices where there are stations requiring five digits or four digits and a party letter, a delay will be introduced to allow the fifth digit or the party letter to be dialed. That is, if there are four party lines in the office called, the sender will receive pulses from the pulse machine which will cause it to wait for four seconds after the dialing of the fourth digit to receive the party letter. If no party letter is

dialed at the expiration of that time, the sender will proceed, it being assumed that there is no party letter. For offices having lines with numbers above 9999, the delay will be introduced only if the first two digits dialed are 1 and 0, since the only numbers of five digits are between 10,000 and 10,499.


The pulses from the sender to the call indicator are sent out by a sequence switch in the sender, which makes one revolution in the course of which it transmits a series of positive and negative pulses over the trunk to the manual central office. Four pulses are allowed for each digit to be displayed in the call indicator. The sender cancels some of the positive pulses and strengthens some of the negative pulses as determined by the

STATIONS				DIGITS			
STA.	LAMP RELAYS OPERATED	PULSES REQUIRED		THOU. SANDS	HUND. TENS UNITS	LAMP RELAYS OPERATED	PULSES REQUIRED
0	NONE	—	—	0	0	NONE	—
1	A	+	—	2	1	A	+
W	B	—	H	4	2	B	—
J	C	—	+	6	3	AB	+
R	AB	+	H	8	4	C	—
M	D	—	H	1	5	D	—
				3	6	AD	+
				5	7	BD	—
				7	8	ABD	+
				9	9	CD	—

Figure 50

registers of the sender which recorded the various digits so that for each digit a particular code of pulses is sent. Figure Number 50 shows this code. These pulses are received by relays at the call indicator position and these relays control other relays, four of which, designated A, B, C, and D, are provided for each digit to be displayed. The operation of these latter relays determines which lamps will be lighted and therefore what number will appear in the call indicator as indicated in Figure Number 50.

The three relays which receive the pulses from the sender are shown in Figure Number 51. The SN and SN-1 relays are polarized so that the SN responds only to positive pulses (battery on the ring side of the trunk) and the SN-1 to negative pulses (battery on the tip side of the trunk). The MG relay is marginal and responds only to heavy pulses. Negative pulses operate the SN relay which controls the W and Z relays which introduce the A, B, C, and D relays successively, while heavy negative pulses also operate the MG relay which controls the B and D relays. Positive

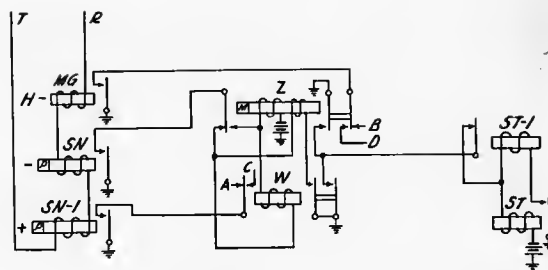

IF 1 ST PULSE IS +	SN-1 OPERATES	OPERATES A RELAY
1 ST - PULSE	SN	" W
		" ST
IF HEAVY PULSE	MG	" B RELAY
ON RELEASE OF SN	Z	"
IF NEXT PULSE IS +	SN-1	" C "
NEXT - PULSE	SN	RELEASES W
IF HEAVY PULSE	MG	OPERATES D RELAY
ON RELEASE OF SN	Z RELEASES	" ST-1

Figure 51

pulses operate the SN-1 relay which controls the A and C relays. The ST and ST-1 relays act as counting relays to introduce a new set of A, B, C and D relays for displaying the next digit. The operation of the circuit is explained in the figure.

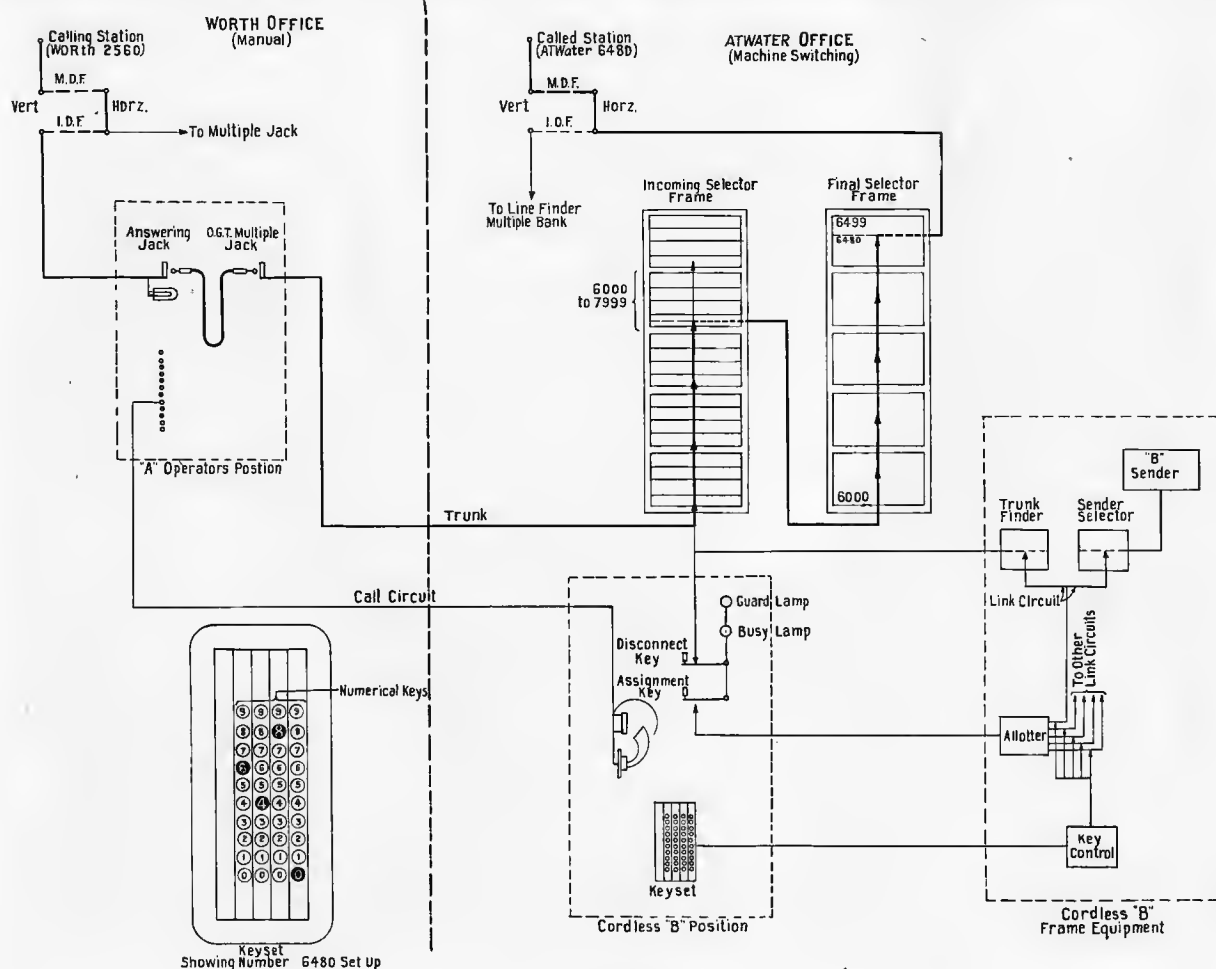


Figure 52

The Machine Switching "B" Switchboard

The reverse of the call just described is equally simple from the standpoint of the subscriber. A subscriber in a manual central office gives to his operator the number he requires without knowing whether the line which he is calling is or is not in a mechanical central office. The operator in a manual central office also makes no distinction between calls to manual central offices and calls to mechanical central offices. In each case she merely presses the proper call circuit button and passes the call to a "B" operator and the "B" operator assigns her a trunk to which she connects the call. The plan of operation for a machine switching office is shown in Figure Number 52. The "B" operator is seated at a special form of "B" switchboard, shown in Figure Number 53. On the upright part of the board is a double row of lamps and keys representing 60 trunks, and on the lower part 4 rows of key buttons marked with the numbers 0 to 9. Each trunk has an assignment key, a disconnect key, a guard lamp, and a busy lamp, and is connected directly to an incoming selector in the office. When the "B" operator assigns a trunk to an operator who is calling, she presses the assignment key of the trunk. This causes two

small panel type selectors mounted on a single frame to rise. One selector finds the trunk whose assignment key has been pressed, the other finds an idle sender of special type provided especially for the use of the "B" operators and associates it and the numerical keys on the lower keyboard in front of the operator with the trunk. The operator records the number desired on the numbered keys which lock down. This sets certain relays in the sender which control the movement of the incoming selector, which is permanently connected to the trunk and of a final selector, and so makes connection to the line desired. The keys release as soon as the number has been recorded and are ready to be used for another call. The sender is released as soon as it has completed its functions. Each "B" operator has 5 sender selector and trunk finder circuits (provision is made for 6 if required), so that she can handle calls in rapid succession, and any sender of a large group common to the office may be used. A frame on which may be mounted the trunk finders and sender selectors for 3 "B" positions and 6 of the special senders is shown in Figure Number 54.

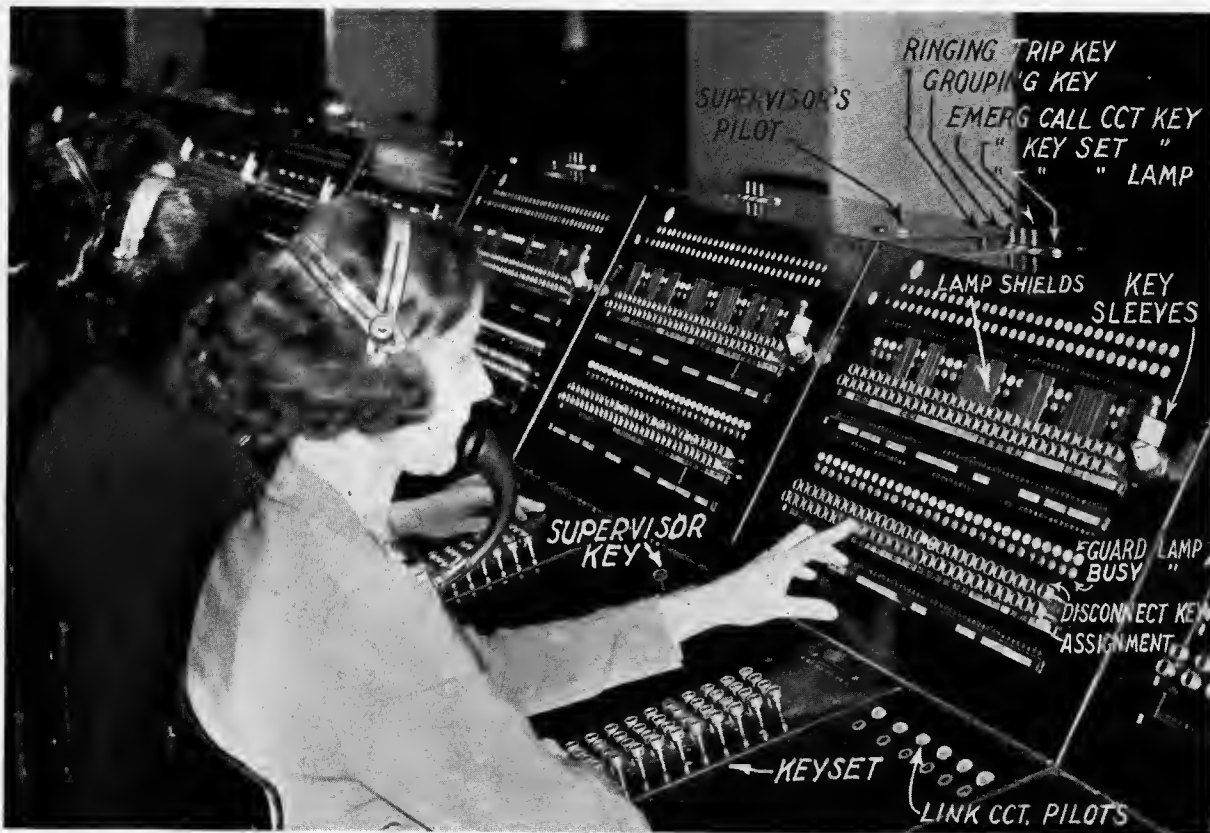


Figure 53

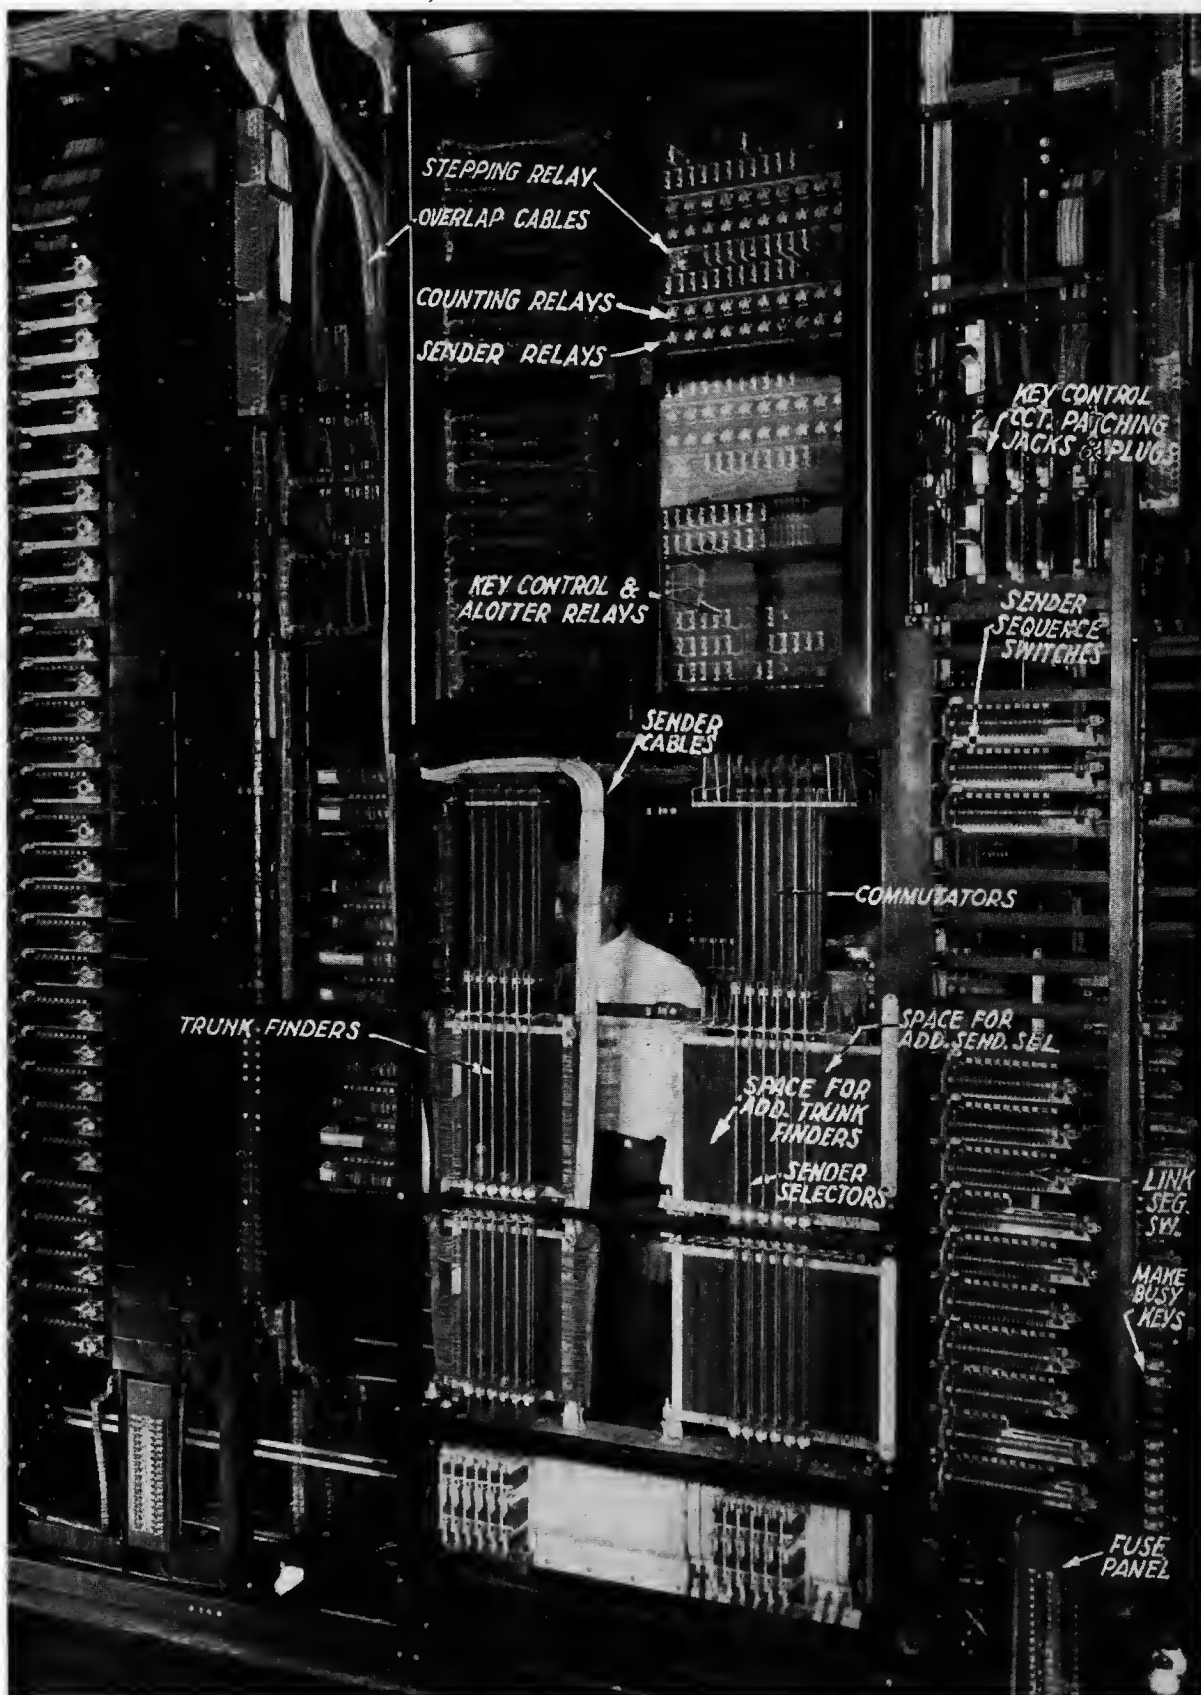


Figure 54
"B" Operator's Sender and Link Frame



Figure 55

The Machine Switching "A" Switchboard

An "A" switchboard with operators is required in a machine switching central office for several purposes. If a subscriber requires assistance, or in case of emergency, it is important that there should be an operator always within reach. Operators are also required to make out tickets for the charges on toll calls and to take care of calls to lines which are out of service or whose numbers have recently been changed. A machine switching "A" board is shown in Figure Number 55, and Figure Number 56 shows a closer view of the equipment of a combination position for handling all classes of calls. The manner of handling the various calls is as follows:

1. Assistance Calls.

The subscriber dials zero. The sender directs the district selector to a special group of trunks leading to a jack and lamp in front of the operator and no further selections are made. The operator answers the call with a cord and gives the subscriber the necessary instructions.

2. Toll Calls.

The subscriber dials zero and is connected to the operator as above. Should he dial the code of a central office which appears in his directory but for a call to which a toll charge is made, the sender will receive from the pulse machine such pulses as will cause it to direct the district selector to a trunk leading to the operator. The

operator answers with one of the single ended cords shown at the right in Figure Number 56. The other end of this cord terminates in a district selector on a special operator's district frame. A link circuit consisting of a cord finder and a sender selector, which in this case are rotary switches, connects to the cord a special

operator's sender and the numbered keys shown in Figure Number 56 in front of the cords. A frame with link circuits and senders is shown in Figure Number 57. The operator records the number desired on the above keys, pressing first a "route" key, which directs the operator's district selector to a group of trunks

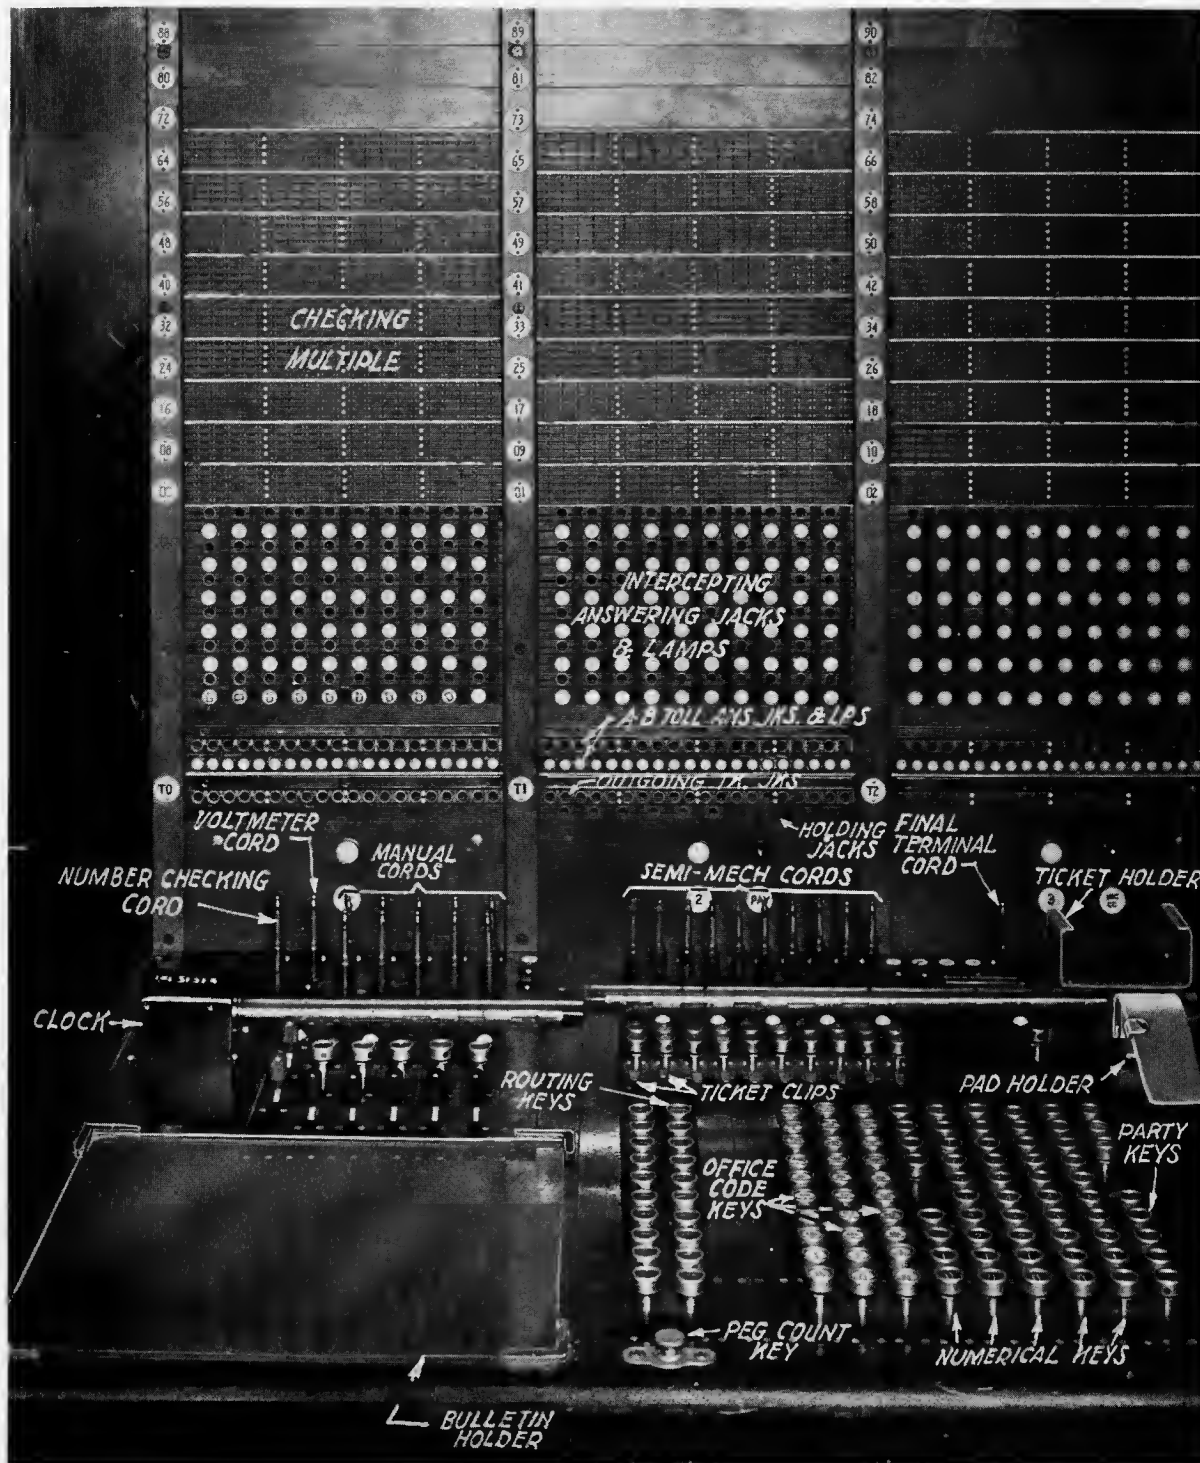


Figure 56
"A" Switchboard—Combination Position

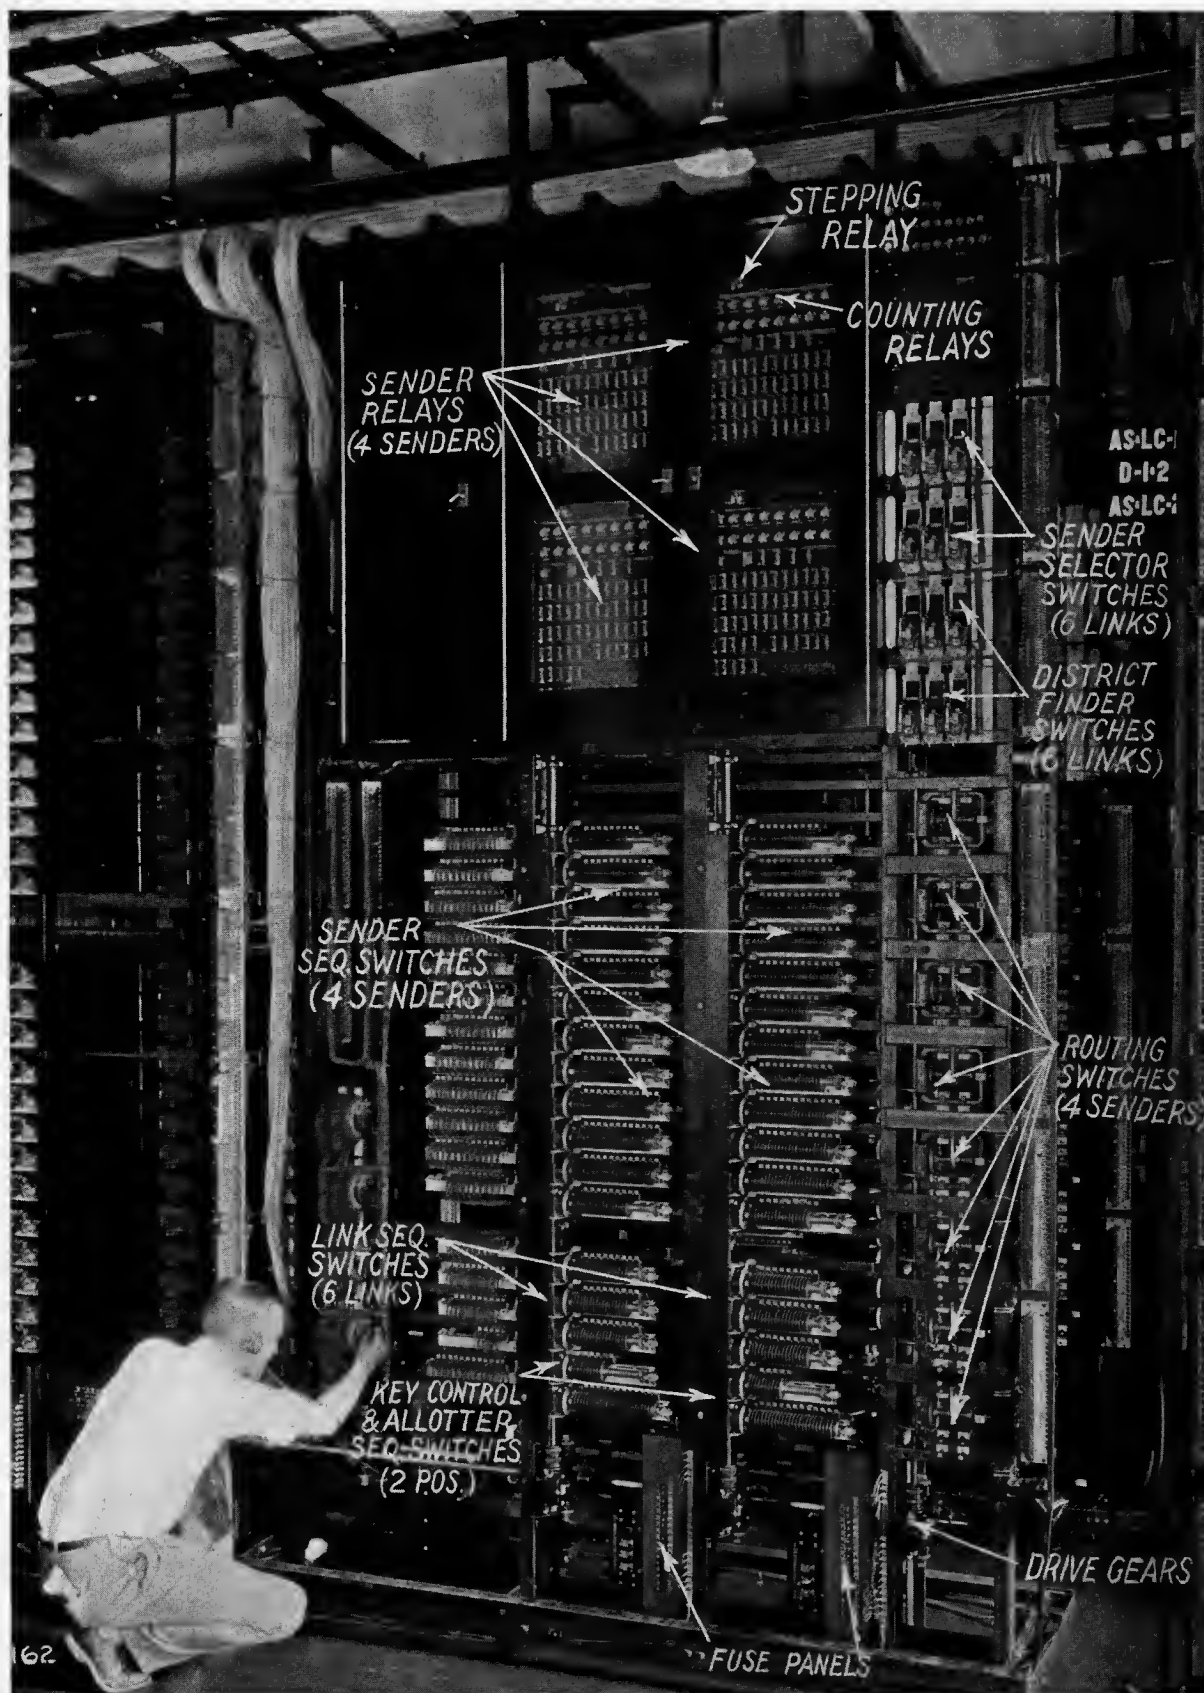


Figure 57
 "A" Operator's Sender and Link Frame
 (Non-Unit Type)

leading to another office where the movements of selectors are controlled in the usual way, or to a tandem board where the office code and the number are displayed on a call indicator. Figure Number 58 is a plan of the operation of such a call to another machine switching central office.

3. Vacant Code Calls.

If a subscriber dials by mistake an office code which is not assigned to any working office in his area, the sender will receive pulses from the pulse machine which will cause it to direct the district selector to a special group of trunks leading to jacks and lamps in the "A" board. The operator will answer in the usual way and inform the subscriber of his mistake.

4. Intercepted Calls.

All subscribers' line terminals not in use are connected together in groups and each group connected to a jack and lamp at the "A" board. Lines temporarily out of service or on which service is denied are also connected to similar jacks. Anyone calling one of these lines will therefore be answered by an operator who will use one of the double ended cord circuits shown at the left of Figure Number 56. With these cords the operator may complete calls to other lines in the central office by way of the "B" board.

When handling a toll call the operator writes a ticket and the subscriber is charged for the call in accordance with this ticket. As all subscribers in the office use the same jacks when calling the operator, it is necessary for the operator to ask the subscriber his number in order to know to whom to charge the call. To guard against the possibility of the subscriber giving the wrong number and so causing the call to be charged to someone else, each subscriber's line is connected to a brass pin in a "checking multiple" installed in the face of the board above the answering jacks. If while the operator is talking to the subscriber she touches the pin connected to his line with the tip of a plug on a special checking cord, one of which is installed in each operator's position, she will hear a distinctive tone and she will not hear this tone when she touches any other pin in the checking multiple. The operator may thus verify the correctness of the number given by the subscriber.

The cord circuits of the "A" board are so arranged that the answer of the operator does not operate the subscriber's message register.

Figure Number 59 is a view of an operating room showing both A and B switchboards.

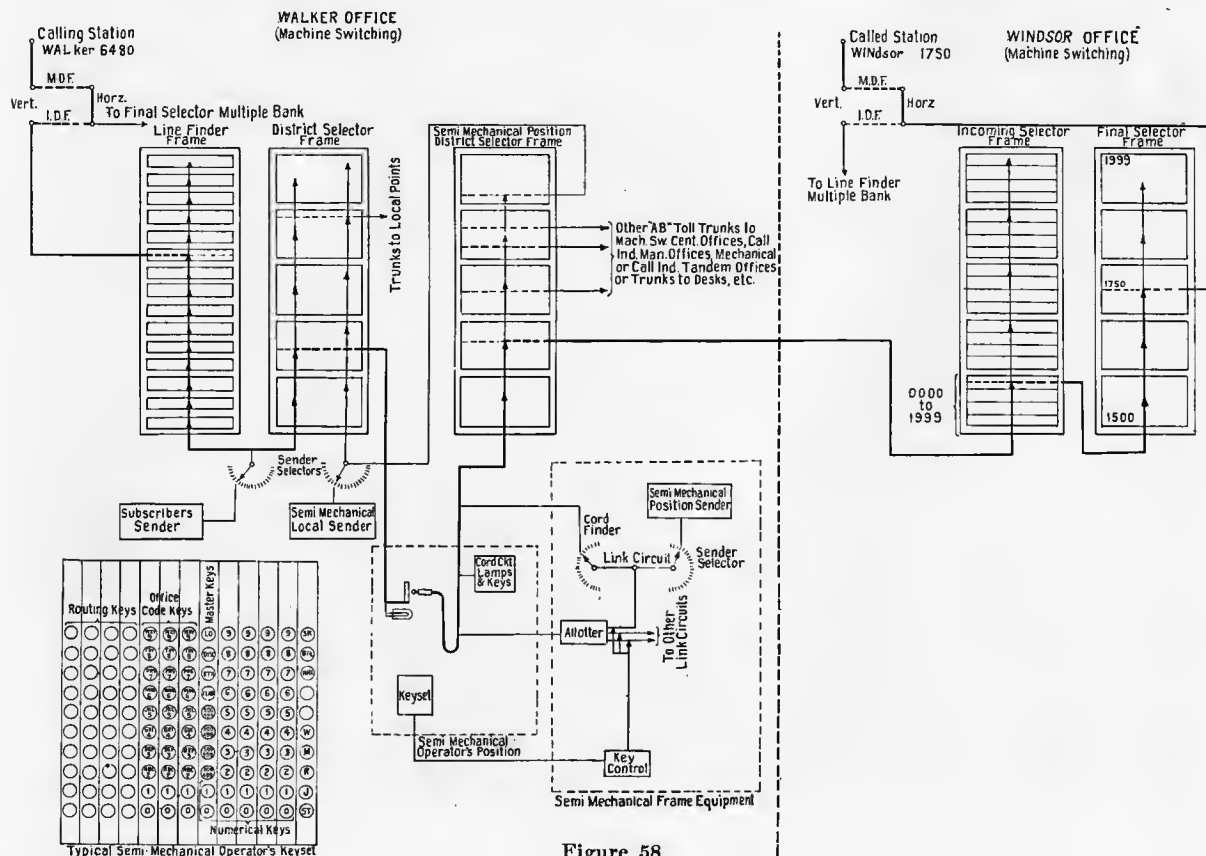


Figure 58



Figure 59
Operating Room



Figure 60

The Sender Monitor

In manual telephone systems any irregularity in the progress of a call is at once made apparent to the operator by the condition of the supervisory lamps. On machine switching calls there is no operator to keep watch or "monitor" so that other means must be provided to take care of the subscriber should trouble arise in the course of the operation.

Each sender circuit is provided with a time measure which consists of a rotary switch operated by an interrupter. As soon as the sender has been connected to a subscriber's line, this time measure starts to count time and if at the end of a certain time (33 seconds to 1 minute in New York) the subscriber has not dialed, a lamp, one of which is connected to each sender, is lighted. This lamp appears at a switchboard known as the "trouble desk" in front of an operator called the "sender monitor." A trouble desk is shown in Figure Number 60. The two girls seated at the left are the sender monitors. The time measure continues to operate during all of the time that the sender is in use. Should the subscriber fail to dial all of the number, or should the sender fail to complete its proper functions in a given time, the lamp will light. Associated with each sender lamp are jacks, by means of which the sender monitor can enter the talking circuit and talk to the subscriber. She may also, by

means of these jacks, release the sender from the connection or make it busy if it is causing the trouble, so that it may be kept out of use until it can be repaired. Should the sender lamp light, but the sender monitor not find a subscriber on the line, a condition which would occur if a receiver were accidentally left off the hook, or any of those conditions be present which in a manual central office would cause a permanent line signal, she may cause the call to be routed to a trunk known as a "permanent signal holding line," which terminates in jacks and lamps at her position. In this way the subscriber's line which is causing the trouble is connected to the sender monitor and the sender released so that it may be used by another subscriber.

All vital parts of the apparatus, such as driving motors, fuses, etc., are provided with alarms so that any failure which would affect operation is at once announced to the maintenance forces. These alarms are grouped on panels known as "floor alarm boards," one of which is provided on each floor. Pilots at the trouble desk also call the attention of the sender monitors to the failure, and aisle pilots, located near the ceiling at the end of each aisle between the rows of frames of mechanical apparatus, indicate the location of the fault, so that it may be quickly found by the maintenance men.

Testing

The right-hand part of the trouble desk in Figure Number 60 is the outgoing trunk test board. Here appears a multiple of all trunks going out of the office. A complete equipment of keys for making calls, a dial, a voltmeter, etc., are provided so that the testmen are able to make complete tests on all of these trunks and check not only their condition but the operation of the apparatus to which they are connected in distant central offices.

Equipment similar to that used in manual offices is provided for testing subscribers' lines and, in addition, an automatic apparatus to assist repairmen in adjusting the speed of subscribers' dials. This consists of a pendulum device mounted on the wall of the central office. A repairman at a subscriber's station, wishing to adjust the dial, dials a special code, which connects the subscriber's instrument to the dial tester. He then dials zero and the dial tester indicates to him by means of tones whether the dial is moving too fast or too slow.

To give the best type of service to the subscribers and to maintain the equipment at its best efficiency it is not considered sufficient to care for troubles in the machine switching apparatus as

they occur in actual use, but in each office equipment is provided for routine testing of the apparatus at stated intervals, even though no faults have appeared in service. A test frame is provided for each type of selector and each type of sender in the office. Figure Number 62 shows a frame for testing incoming selectors and Figure Number 63 portable and permanent types of equipment for testing subscribers' senders. The test frames are automatic in operation. When in use a test frame connects itself to each of the selectors or senders which it is designed to test and simulates calls passing through that selector or sender under the limiting conditions for proper operation. If the selector or sender responds properly, the number of tests is registered and the next selector or sender taken in turn. Should a selector or sender fail, however, the operation is arrested while the test frame sounds an alarm and indicates by means of lighted lamps at what point in the operation the failure occurred. The test frames when making routine tests will not, of course, interfere with selectors or senders which are in use by subscribers.

For making tests on particular selectors while observing their operation a portable test set such as is shown in Figure Number 61 is used.

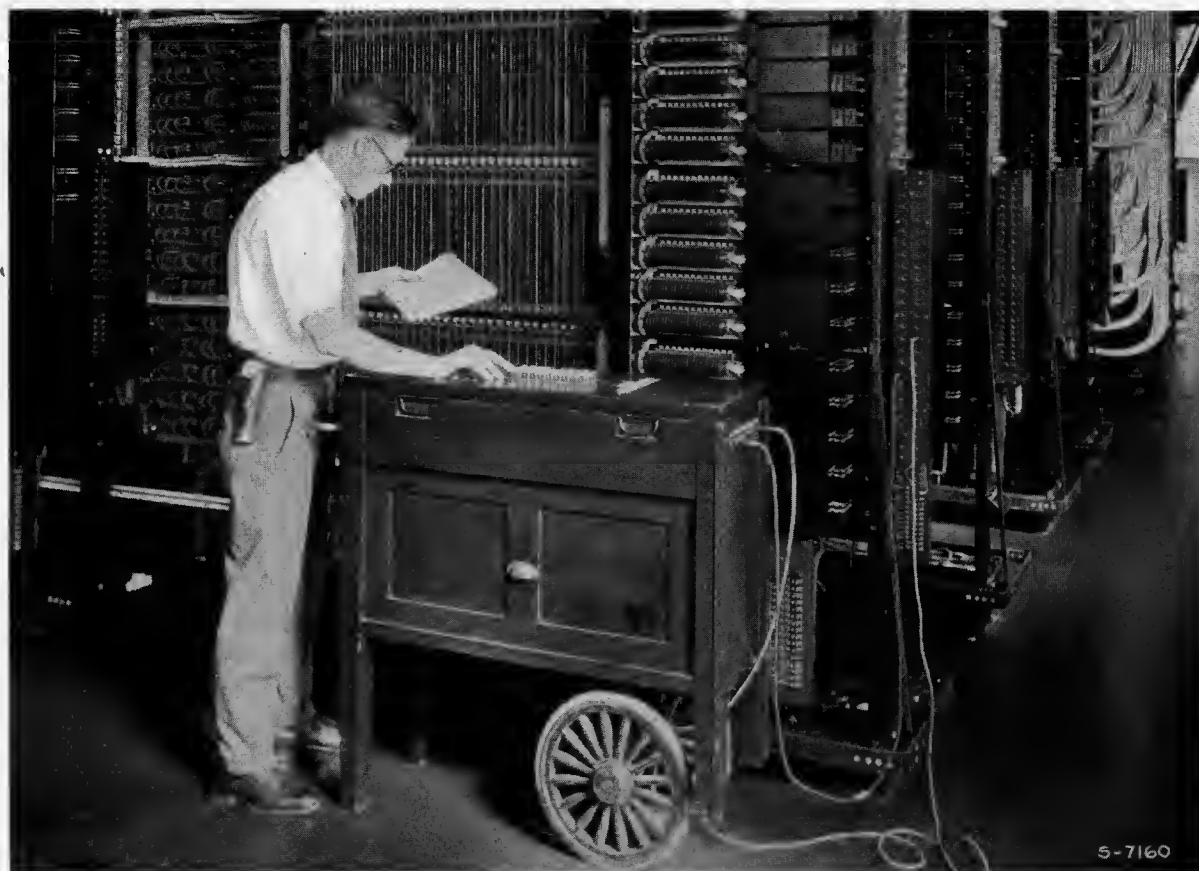


Figure 61

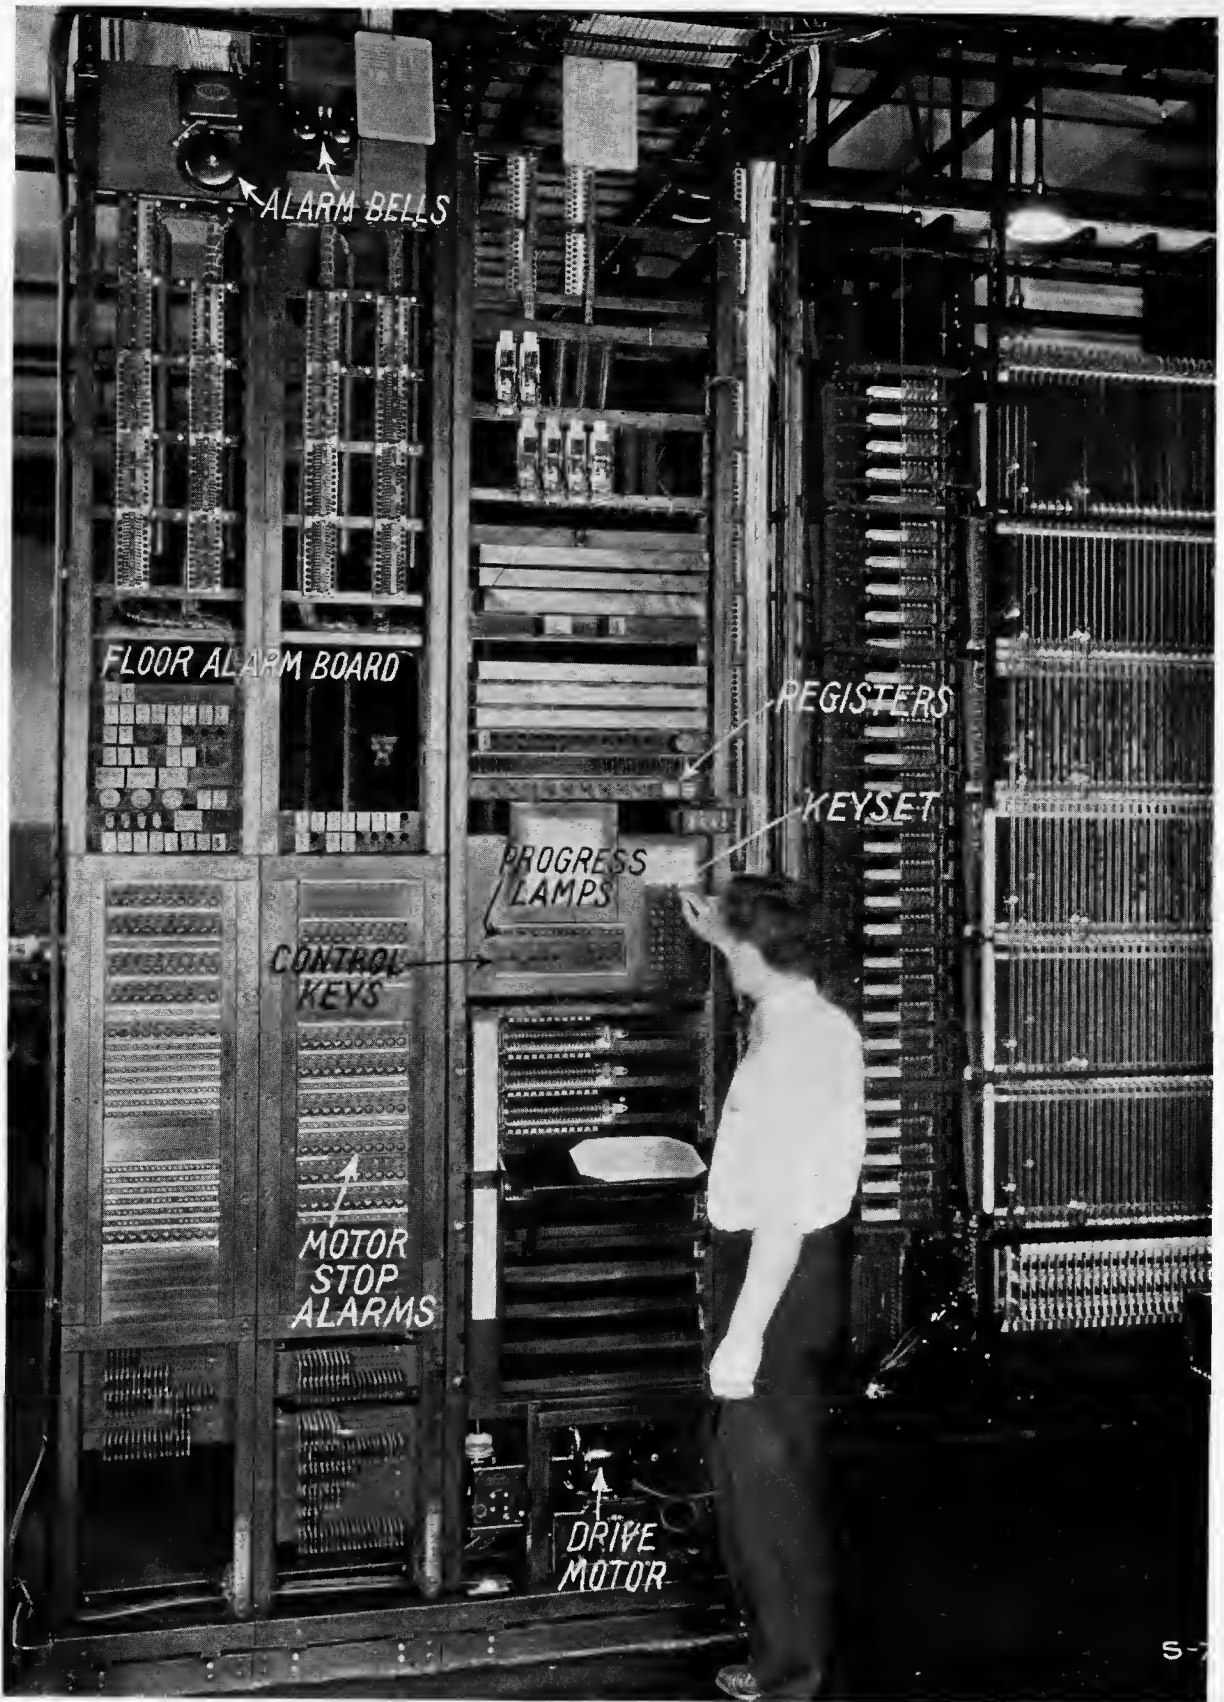


Figure 62
Incoming Selector Routine Test Frame and Floor Alarm Board

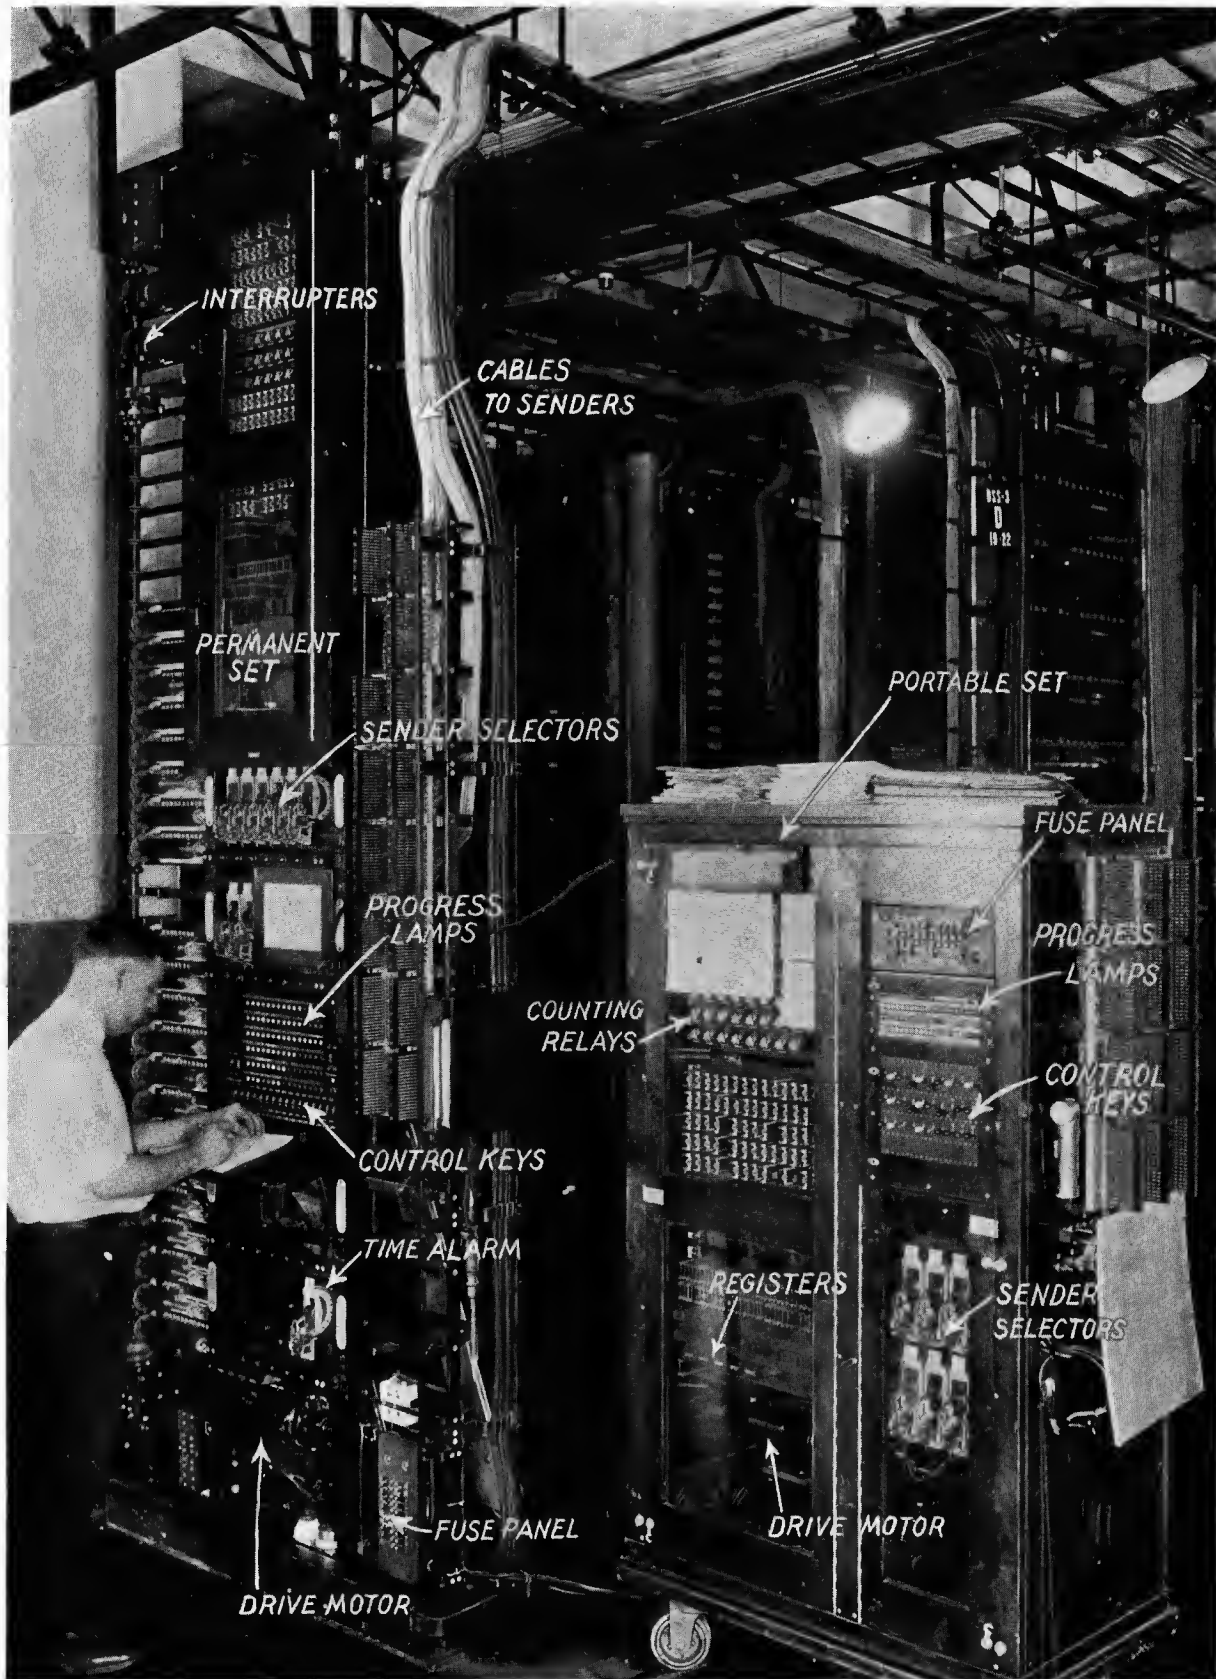


Figure 63
Permanent and Portable Subscriber's Sender Routine Test Sets